

A


B

C

D






E

SCHEMATIC



MODEL NO

D

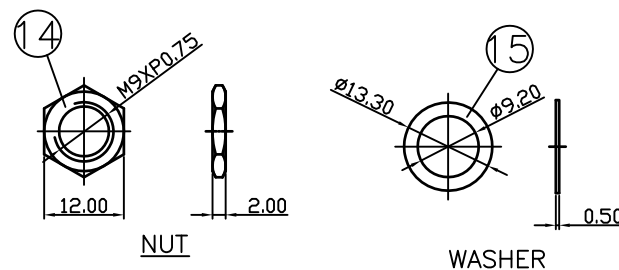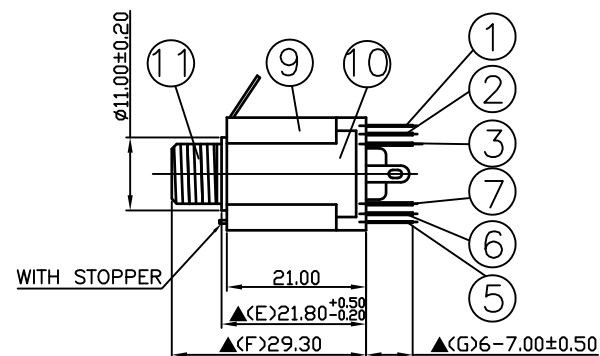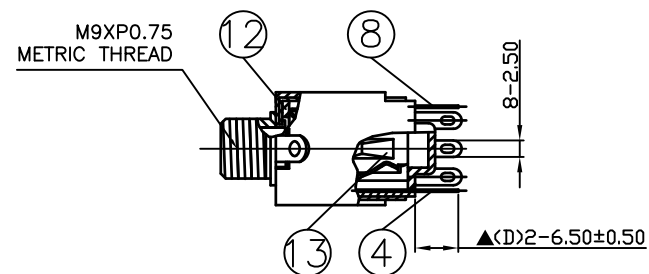

15	Washer	0.5T Steel	1	Nickel Plated
14	Nut	2.0T Steel	1	Nickel Plated
13	Insulator	POM	1	Ivory Color
12	Insulator	Red Vulcanited Fibre	1	Red Color
11	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
10	Cover	0.5T Steel	1	Nickel Plated
9	Housing	POM	1	Black Color
8.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
7.	Transfer Terminal	0.4T Brass	1	Silver Plated
6.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
5.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
3.	Transfer Terminal	0.4T Brass	1	Silver Plated
2.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
1.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2022	王平華			

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NDS3B22L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant