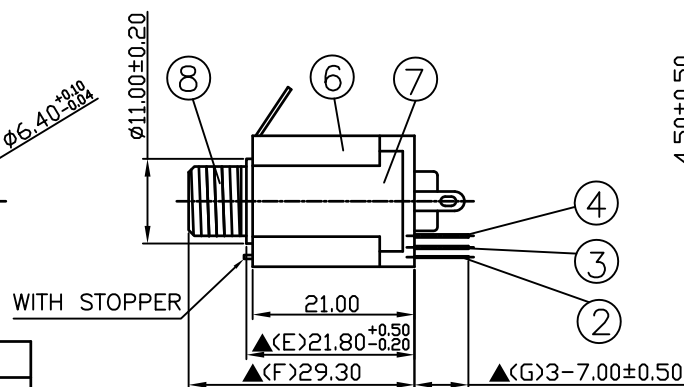
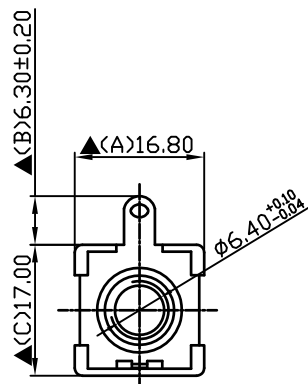
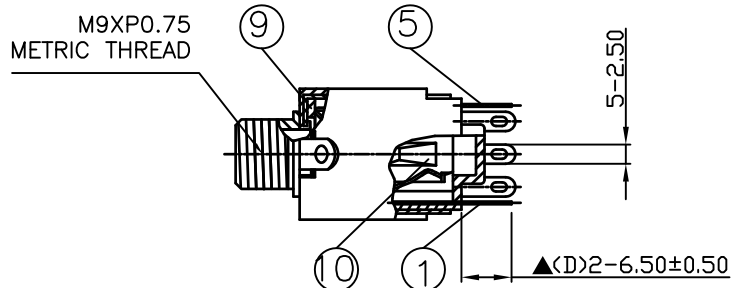



12	Washer	0.5T Steel	1	Nickel Plated
11	Nut	2.0T Steel	1	Nickel Plated
10	Insulator	POM	1	Ivory Color
9	Insulator	Red Vulcanited Fibre	1	Red Color
8.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
7.	Cover	0.5T Steel	1	Nickel Plated
6.	Housing	POM	1	Black Color
5.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
4.	Transfer Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
2.	Make Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	01.06.2022	王平華			

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ614M2NFS3B22L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲: The Most Important Dimension

For Rederence
僅供參考

RoHS&SVHC
Compliant