








A

B


C

D

E

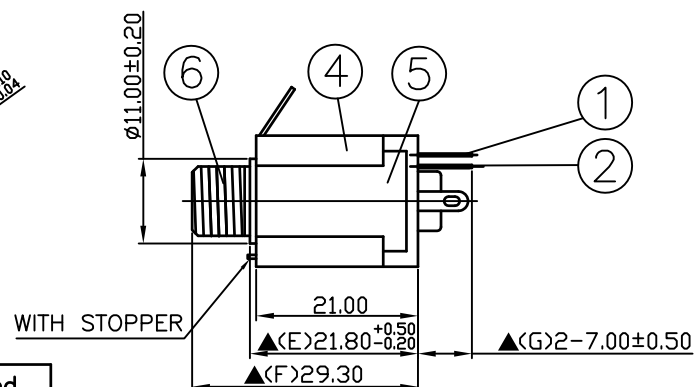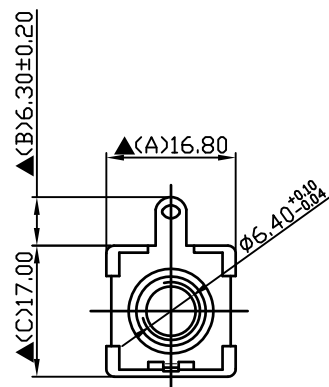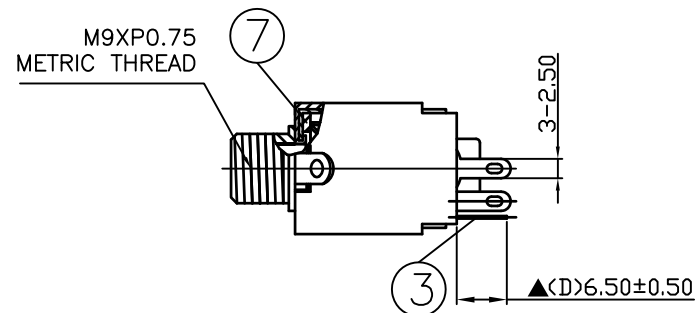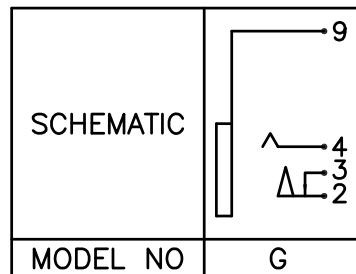

NUT



WASHER

10	Washer	0.5T Steel	1	Nickel Plated
9	Nut	2.0T Steel	1	Nickel Plated
8.	Insulator	POM	1	Ivory Color
7.	Insulator	Red Vulcanited Fibre	1	Red Color
6.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
5.	Cover	0.5T Steel	1	Nickel Plated
4.	Housing	POM	1	Black Color
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.06.2022	王平華			

For Redference
僅供參考RoHS&SVHC
Compliant

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NGS3B22L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max

Insulation Resistance : 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute

Remark: ▲: The Most Important Dimension