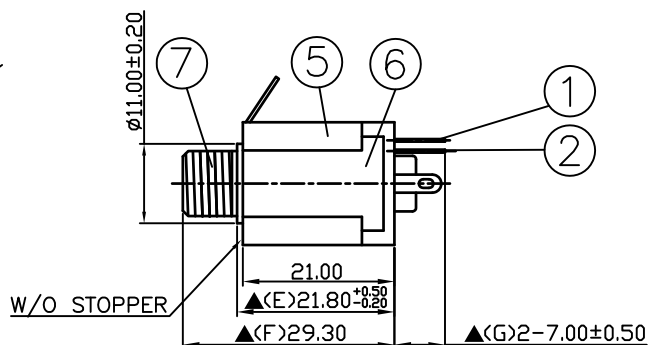
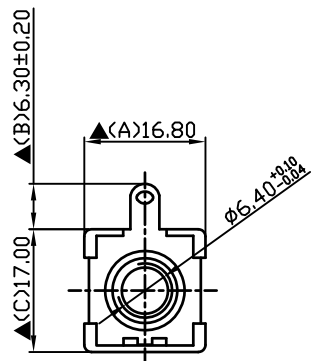
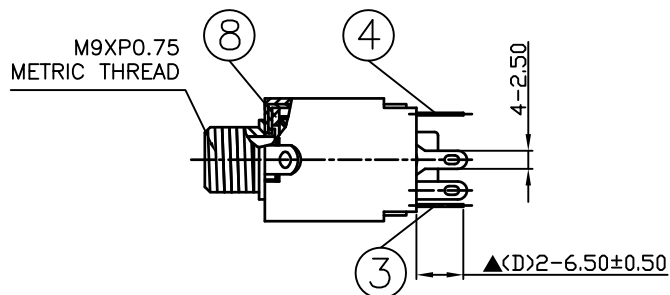



11	Washer	0.5T Steel	1	Nickel Plated
10	Nut	2.0T Steel	1	Nickel Plated
9	Insulator	POM	1	Ivory Color
8	Insulator	Red Vulcanited Fibre	1	Red Color
7	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
6	Cover	0.5T Steel	1	Nickel Plated
5	Housing	POM	1	Black Color
4	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
3	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2	Transfer Terminal	0.4T Brass	1	Silver Plated
1	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	01.06.2022	王平華			

PART NAME : 6.3ø PHONE JACK	PART NUMBER: SCJ614M2NBS3B21L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Reference
僅供參考

RoHS&SVHC
Compliant