
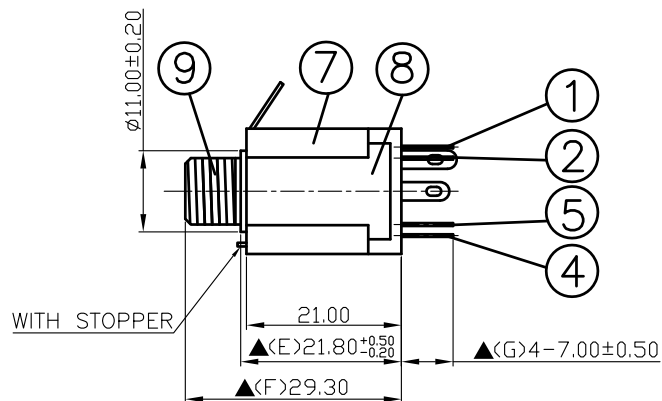
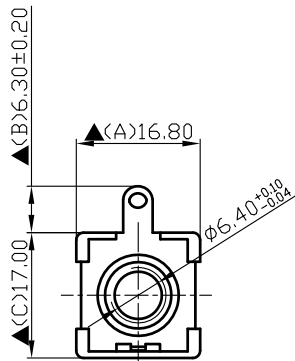
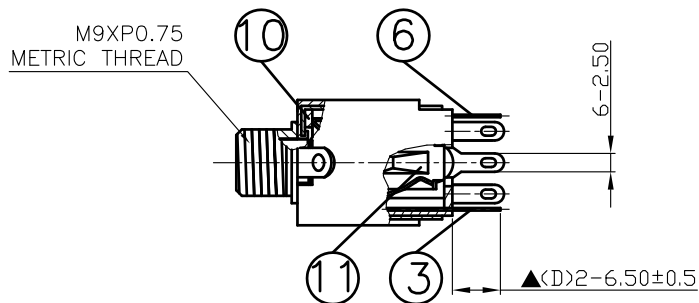



13	Washer	0.5T Steel	1	Nickel Plated
12	Nut	2.0T Steel	1	Nickel Plated
11	Insulator	POM	2	Ivory Color
10	Insulator	Red Vulcanited Fibre	1	Red Color
9	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
8.	Cover	0.5T Steel	1	Nickel Plated
7.	Housing	POM	1	Black Color
6.	Ring Spring	0.35T Phosphor Bronze	1	Silver Plated
5.	Transfer Terminal	0.4T Brass	1	Silver Plated
4.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
3.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
2.	Transfer Terminal	0.4T Brass	1	Silver Plated
1.	Break Terminal	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

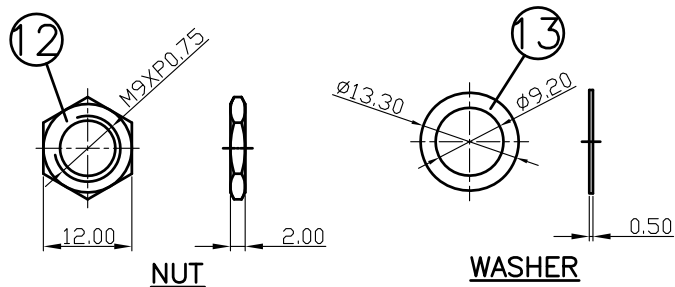

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

01.05.2022

王平華

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NCS3B12L

VERSION:3.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
 僅供參考

RoHS&SVHC
 Compliant