

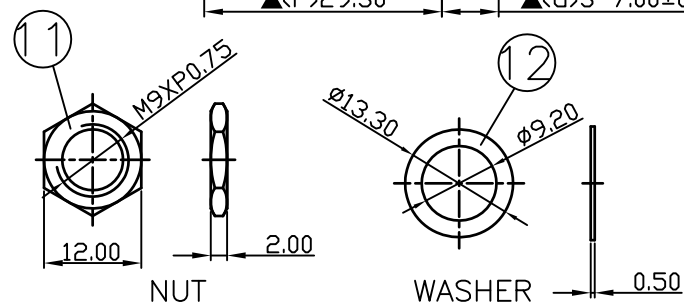
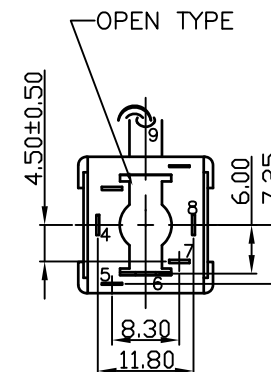
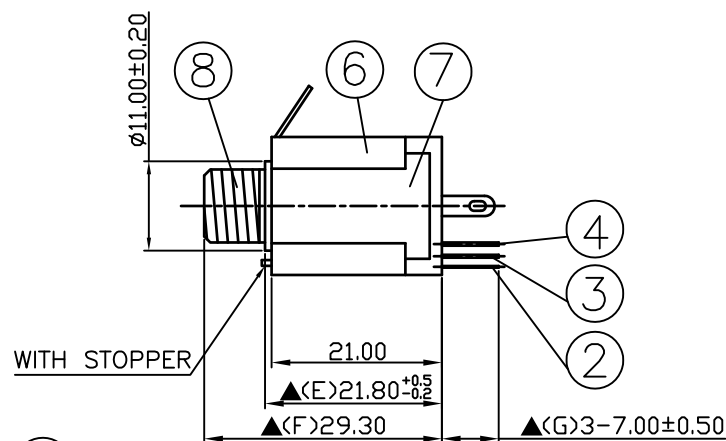
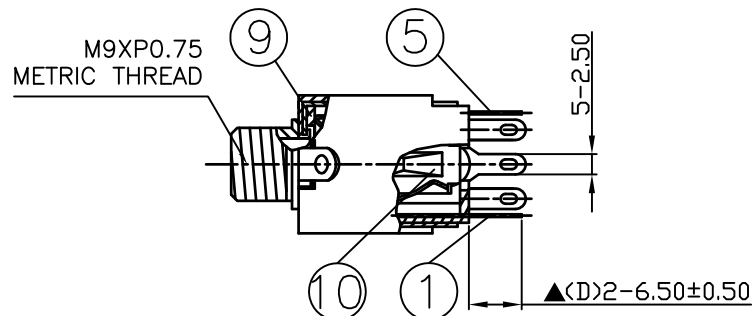


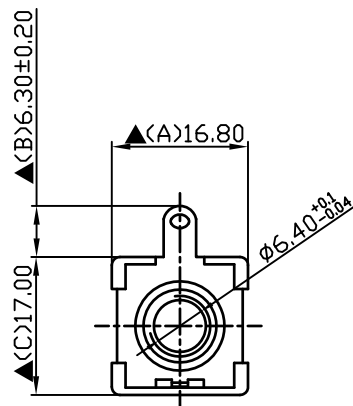

| 12  | Washer            | 0.5T Steel            | 1    | Nickel Plated |
|-----|-------------------|-----------------------|------|---------------|
| 11  | Nut               | 2.0T Steel            | 1    | Nickel Plated |
| 10  | Insulator         | POM                   | 1    | Ivory Color   |
| 9   | Insulator         | Red Vulcanited Fibre  | 1    | Red Color     |
| 8   | Barrel(W/Thread)  | Low Lead Brass Rod    | 1    | Nickel Plated |
| 7   | Cover             | 0.5T Steel            | 1    | Nickel Plated |
| 6   | Housing           | POM                   | 1    | Black Color   |
| 5   | Ring Spring       | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 4   | Transfer Terminal | 0.4T Brass            | 1    | Silver Plated |
| 3   | Break Terminal    | 0.35T Phosphor Bronze | 1    | Silver Plated |
| 2   | Make Terminal     | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| 1   | Tip Spring        | 0.35T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description       | Material              | Q'TY | Finish        |

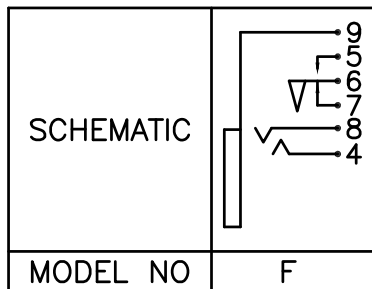

S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 01.05.2022 | 王平華 |      |      |         |

PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NFS3B12L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:  
 Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

For Redference  
 僅供參考

RoHS&SVHC  
 Compliant