

A

A

B

B

C



C

D



D

E


E

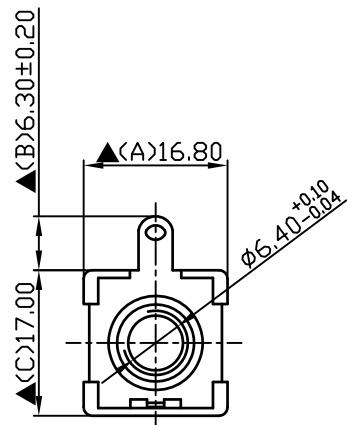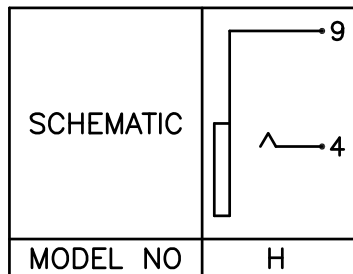

M9XP0.75 METRIC THREAD
WITH STOPPER

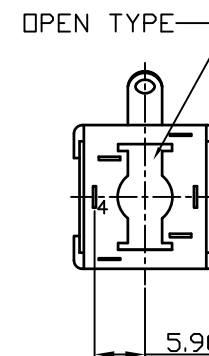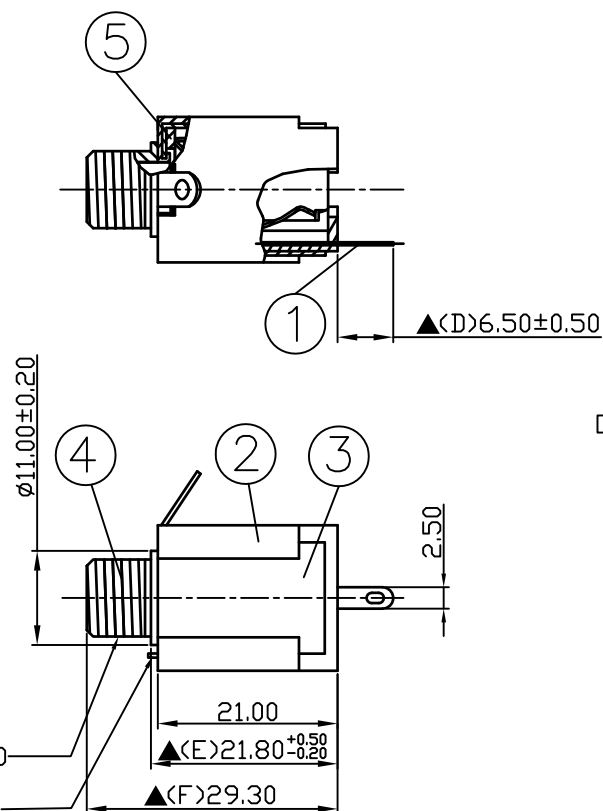

7.	Washer	0.5T Steel	1	Nickel Plated
6.	Nut	2.0T Steel	1	Nickel Plated
5.	Insulator	Red Vulcanited Fibre	1	Red Color
4.	Barrel(W/Thread)	Low Lead Brass Rod	1	Nickel Plated
3.	Cover	0.5T Steel	1	Nickel Plated
2.	Housing	POM	1	Black Color
1.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

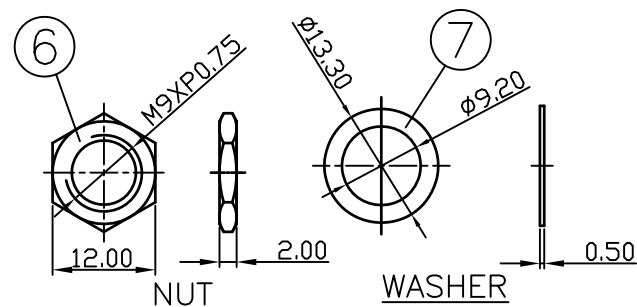

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
01.05.2022	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant


PART NAME : 6.3ø PHONE JACK

PART NUMBER: SCJ614M2NHS3B12L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension