

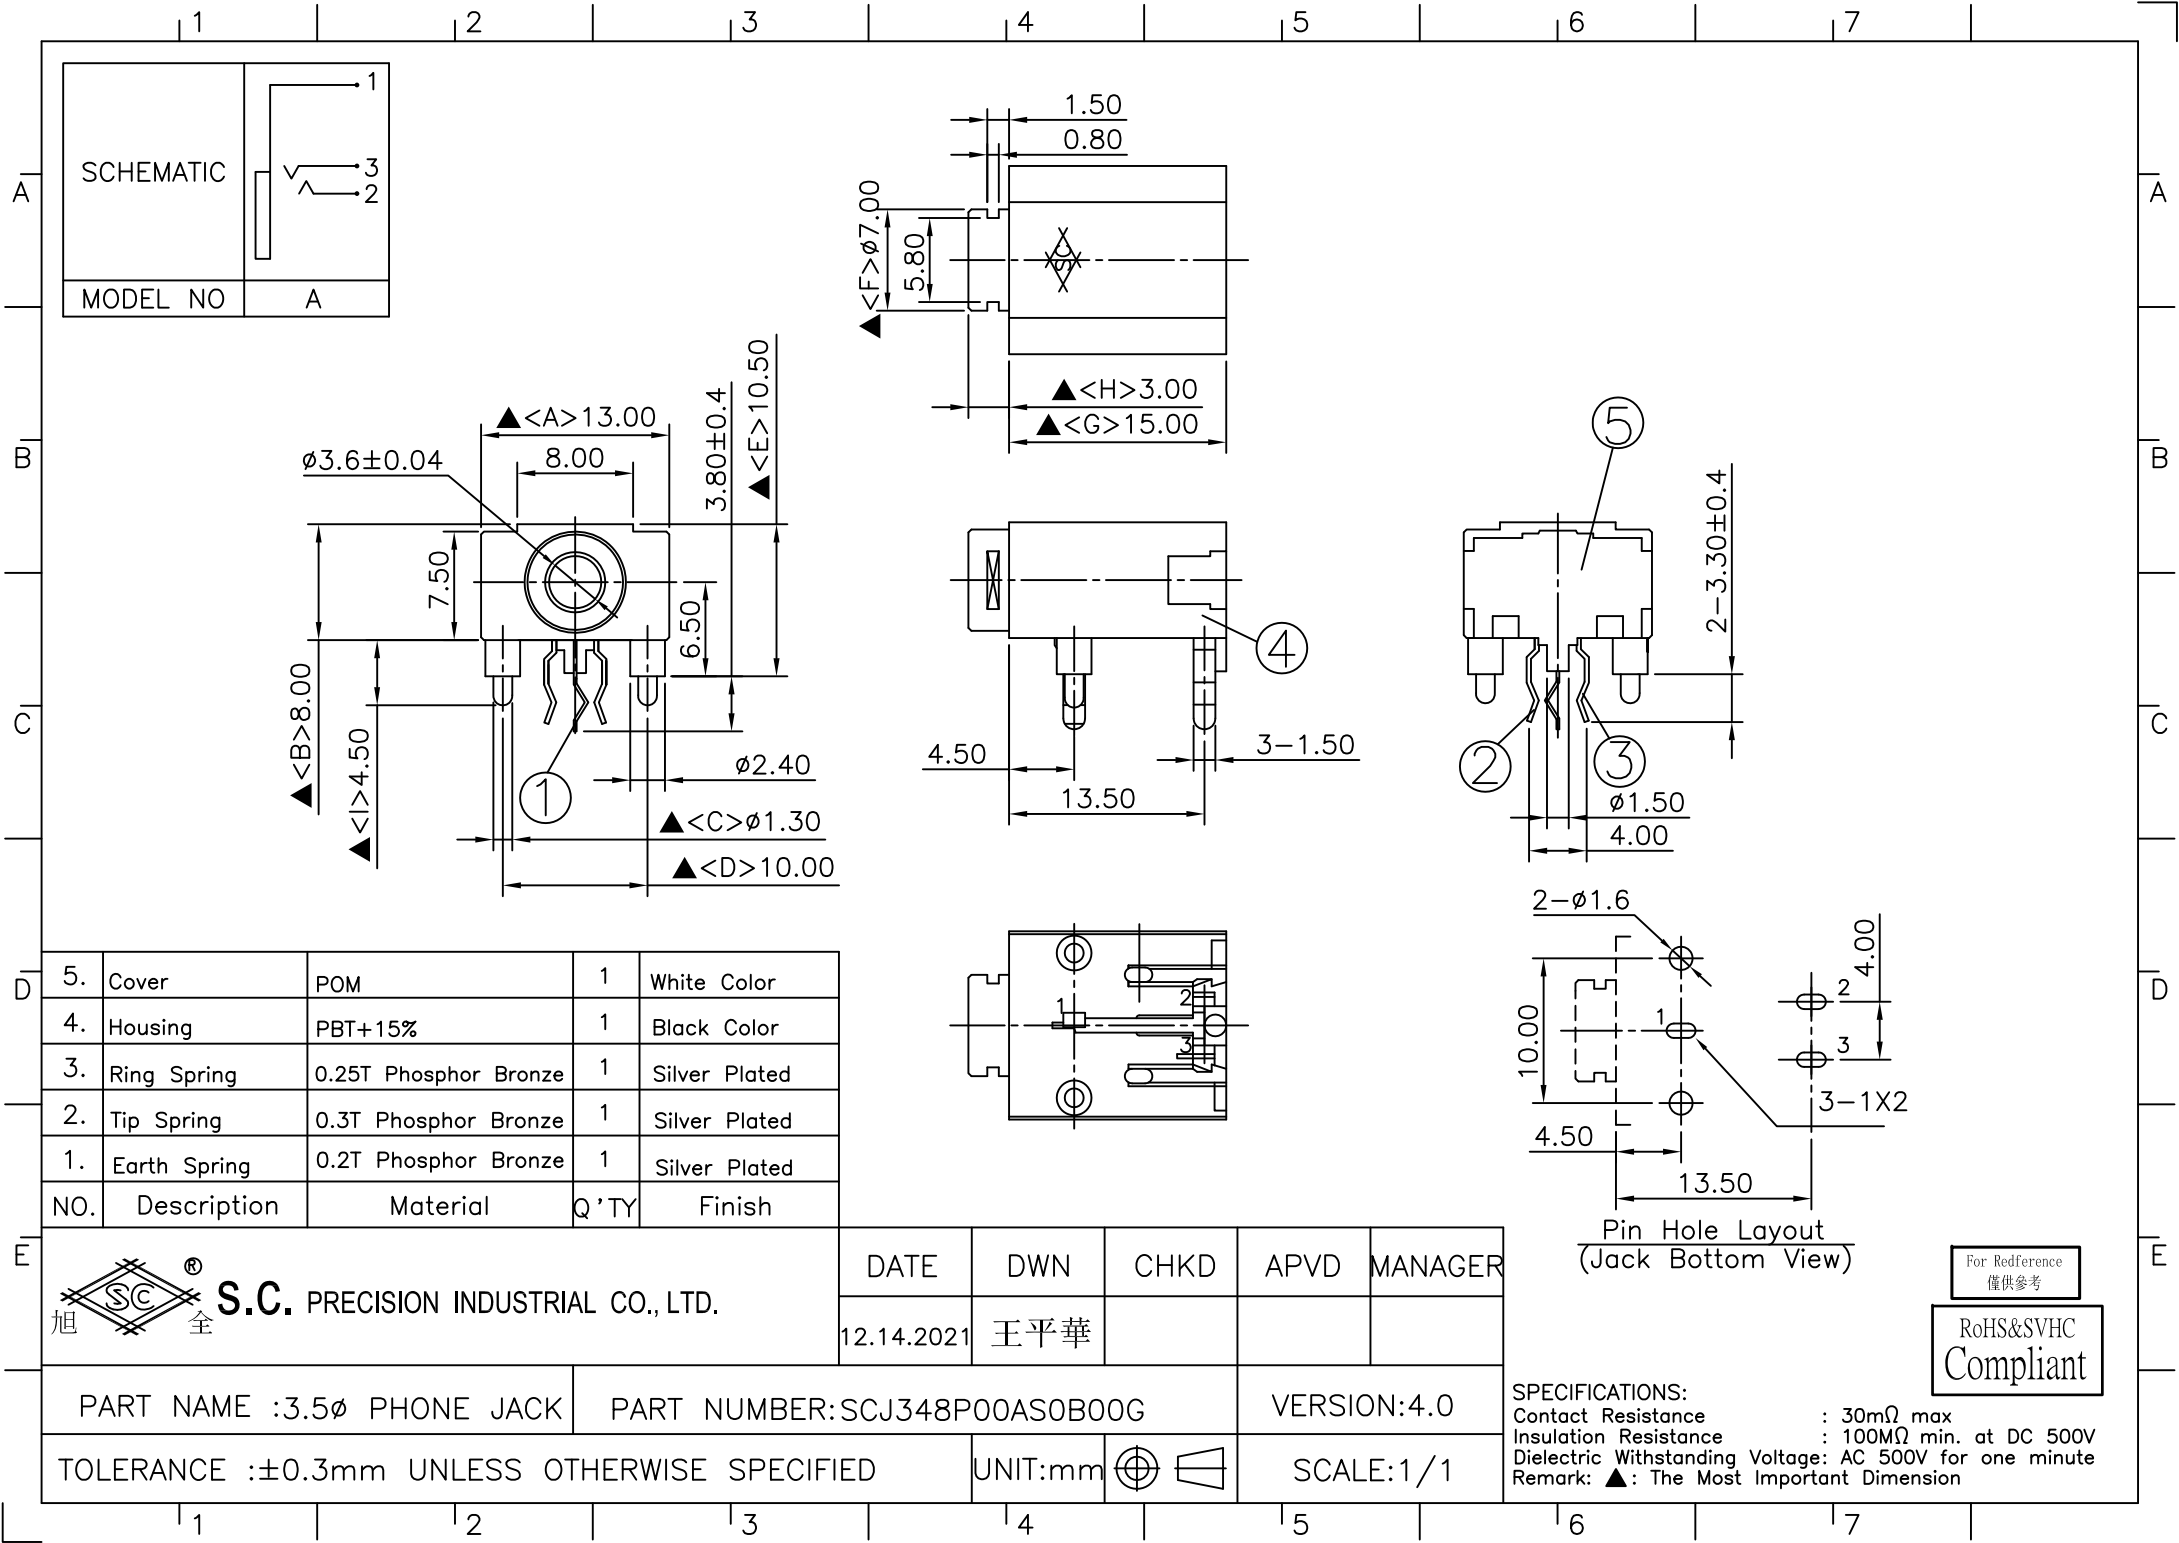
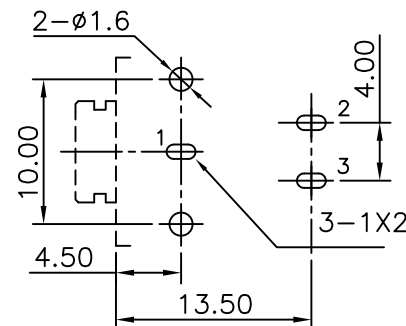
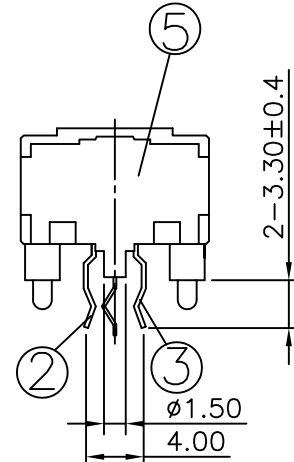

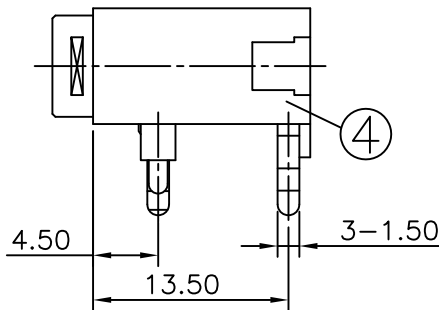


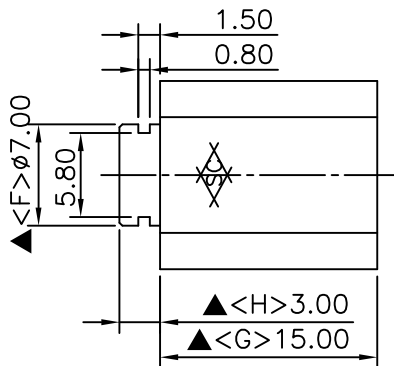

SCHEMATIC

MODEL NO A

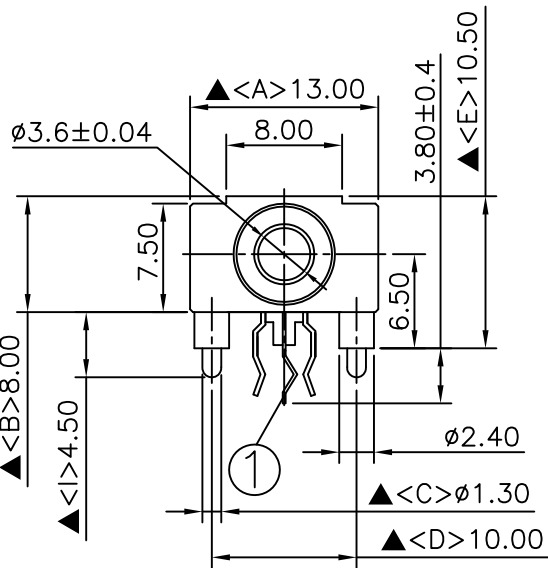


Pin Hole Layout
(Jack Bottom View)

5.	Cover	POM	1	White Color
4.	Housing	PBT+15%	1	Black Color
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.14.2021	王平華			

PART NAME :3.5 ϕ PHONE JACK PART NUMBER:SCJ348P00AS0B00G VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED UNIT:mm  SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考
RoHS&SVHC
Compliant