

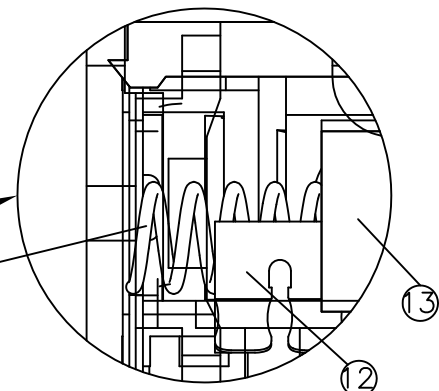
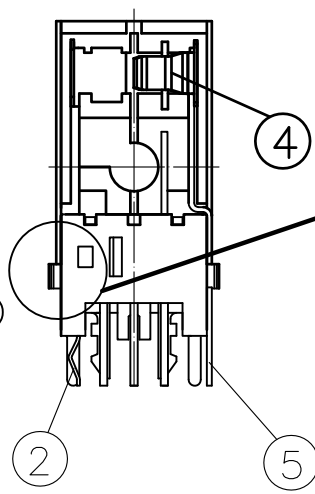
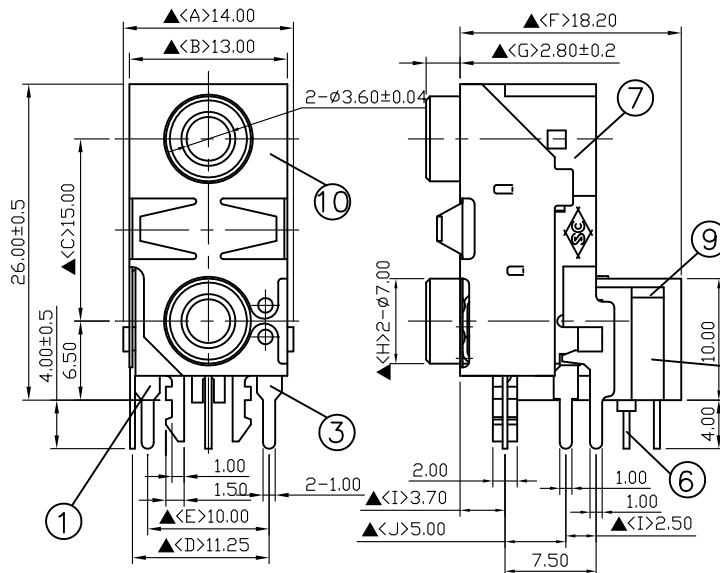



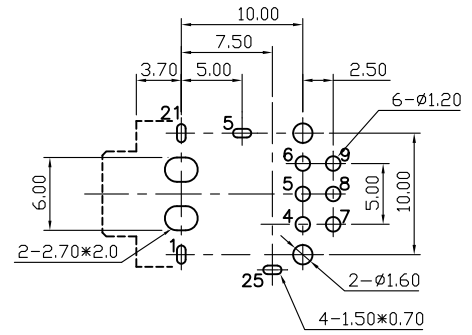

13	Insulator	PA66+33%	1	Black Color
12	Sequins	Tin Phosphor Bronze	2	
11	Spring	SUS-304	1	
10	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
9	Back Housing Cover	PA66+33%	1	Transparent
8	Back Housing	PA66+33%	1	Black Color
7	Housing	PBT	1	Black Color
6	Switch Pin	0.4T Brass	6	Silver Plated
5	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
4	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
3	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
2	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
1	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



Pin Hole Layout
(Jack Bottom View)

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		06.03.2024	王放策			

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ352P00ZS0BNSG	VERSION:5.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant