



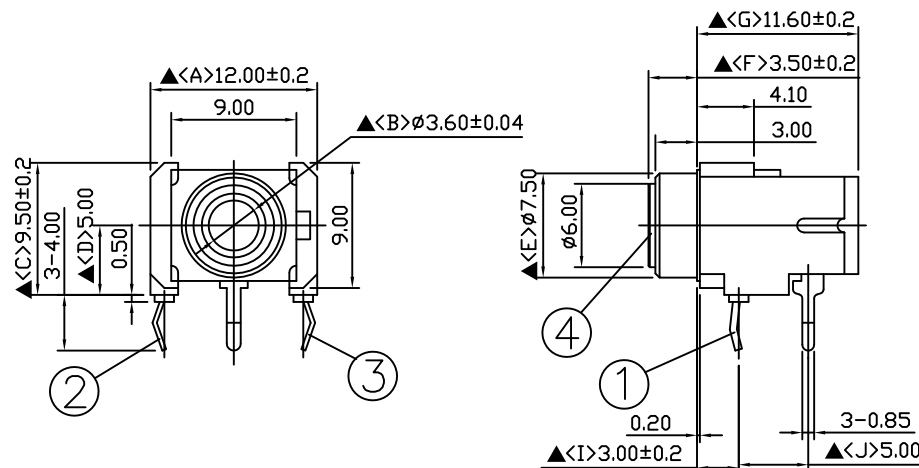


SCHEMATIC	
MODEL NO	X



Pin Hole Layout
(Jack Bottom View)

7.	Bushing	POM	1	Block Color
6.	Cover	PBT+15%	1	Black Color
5.	Housing	PBT+15%	1	Black Color
4.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Ring Spring	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.25.2021	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME :3.5∅ PHONE JACK

PART NUMBER: SCJ356M2NXS0BB0L

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension