

A


B

C

D



E

SCHEMATIC




MODEL NO




U

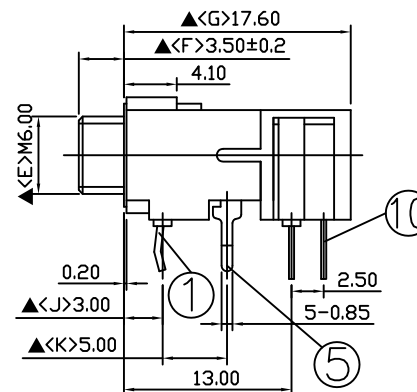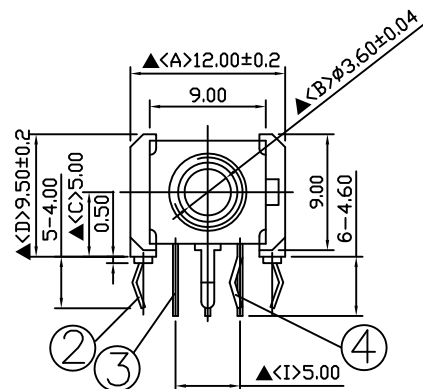

SCALE: (1: 1.5)



14.	Insulator	PA66+33%	1	Black Color
13.	Sequins	Tin phosphor bronze	2	
12.	Spring	Piano Wire	1	
11.	Nut	Low Lead Brass Rod	1	Nickel Plated
10.	Switch Pin	0.4T Brass	6	Silver Plated
9.	Back Housing Cover	PA66+33%	1	Transparent
8.	Back Housing	PBT+15%	1	Black Color
7.	Housing	PBT+15%	1	Black Color
6.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
5.	Tip Spring	0.3T YCuT	1	Silver Plated
4.	Break Terminal	0.4T Brass	1	Silver Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated
NO.	Description	Material	Q'TY	Finish

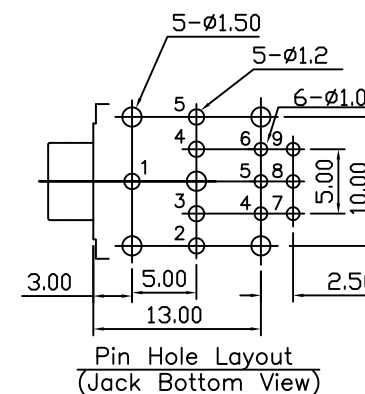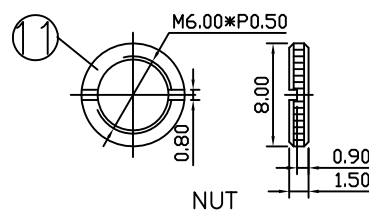

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

07.01.2021

王平華


PART NAME :3.5∅ PHONE JACK

PART NUMBER: SCJ358M1NUS1B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考RoHS&SVHC
Compliant