


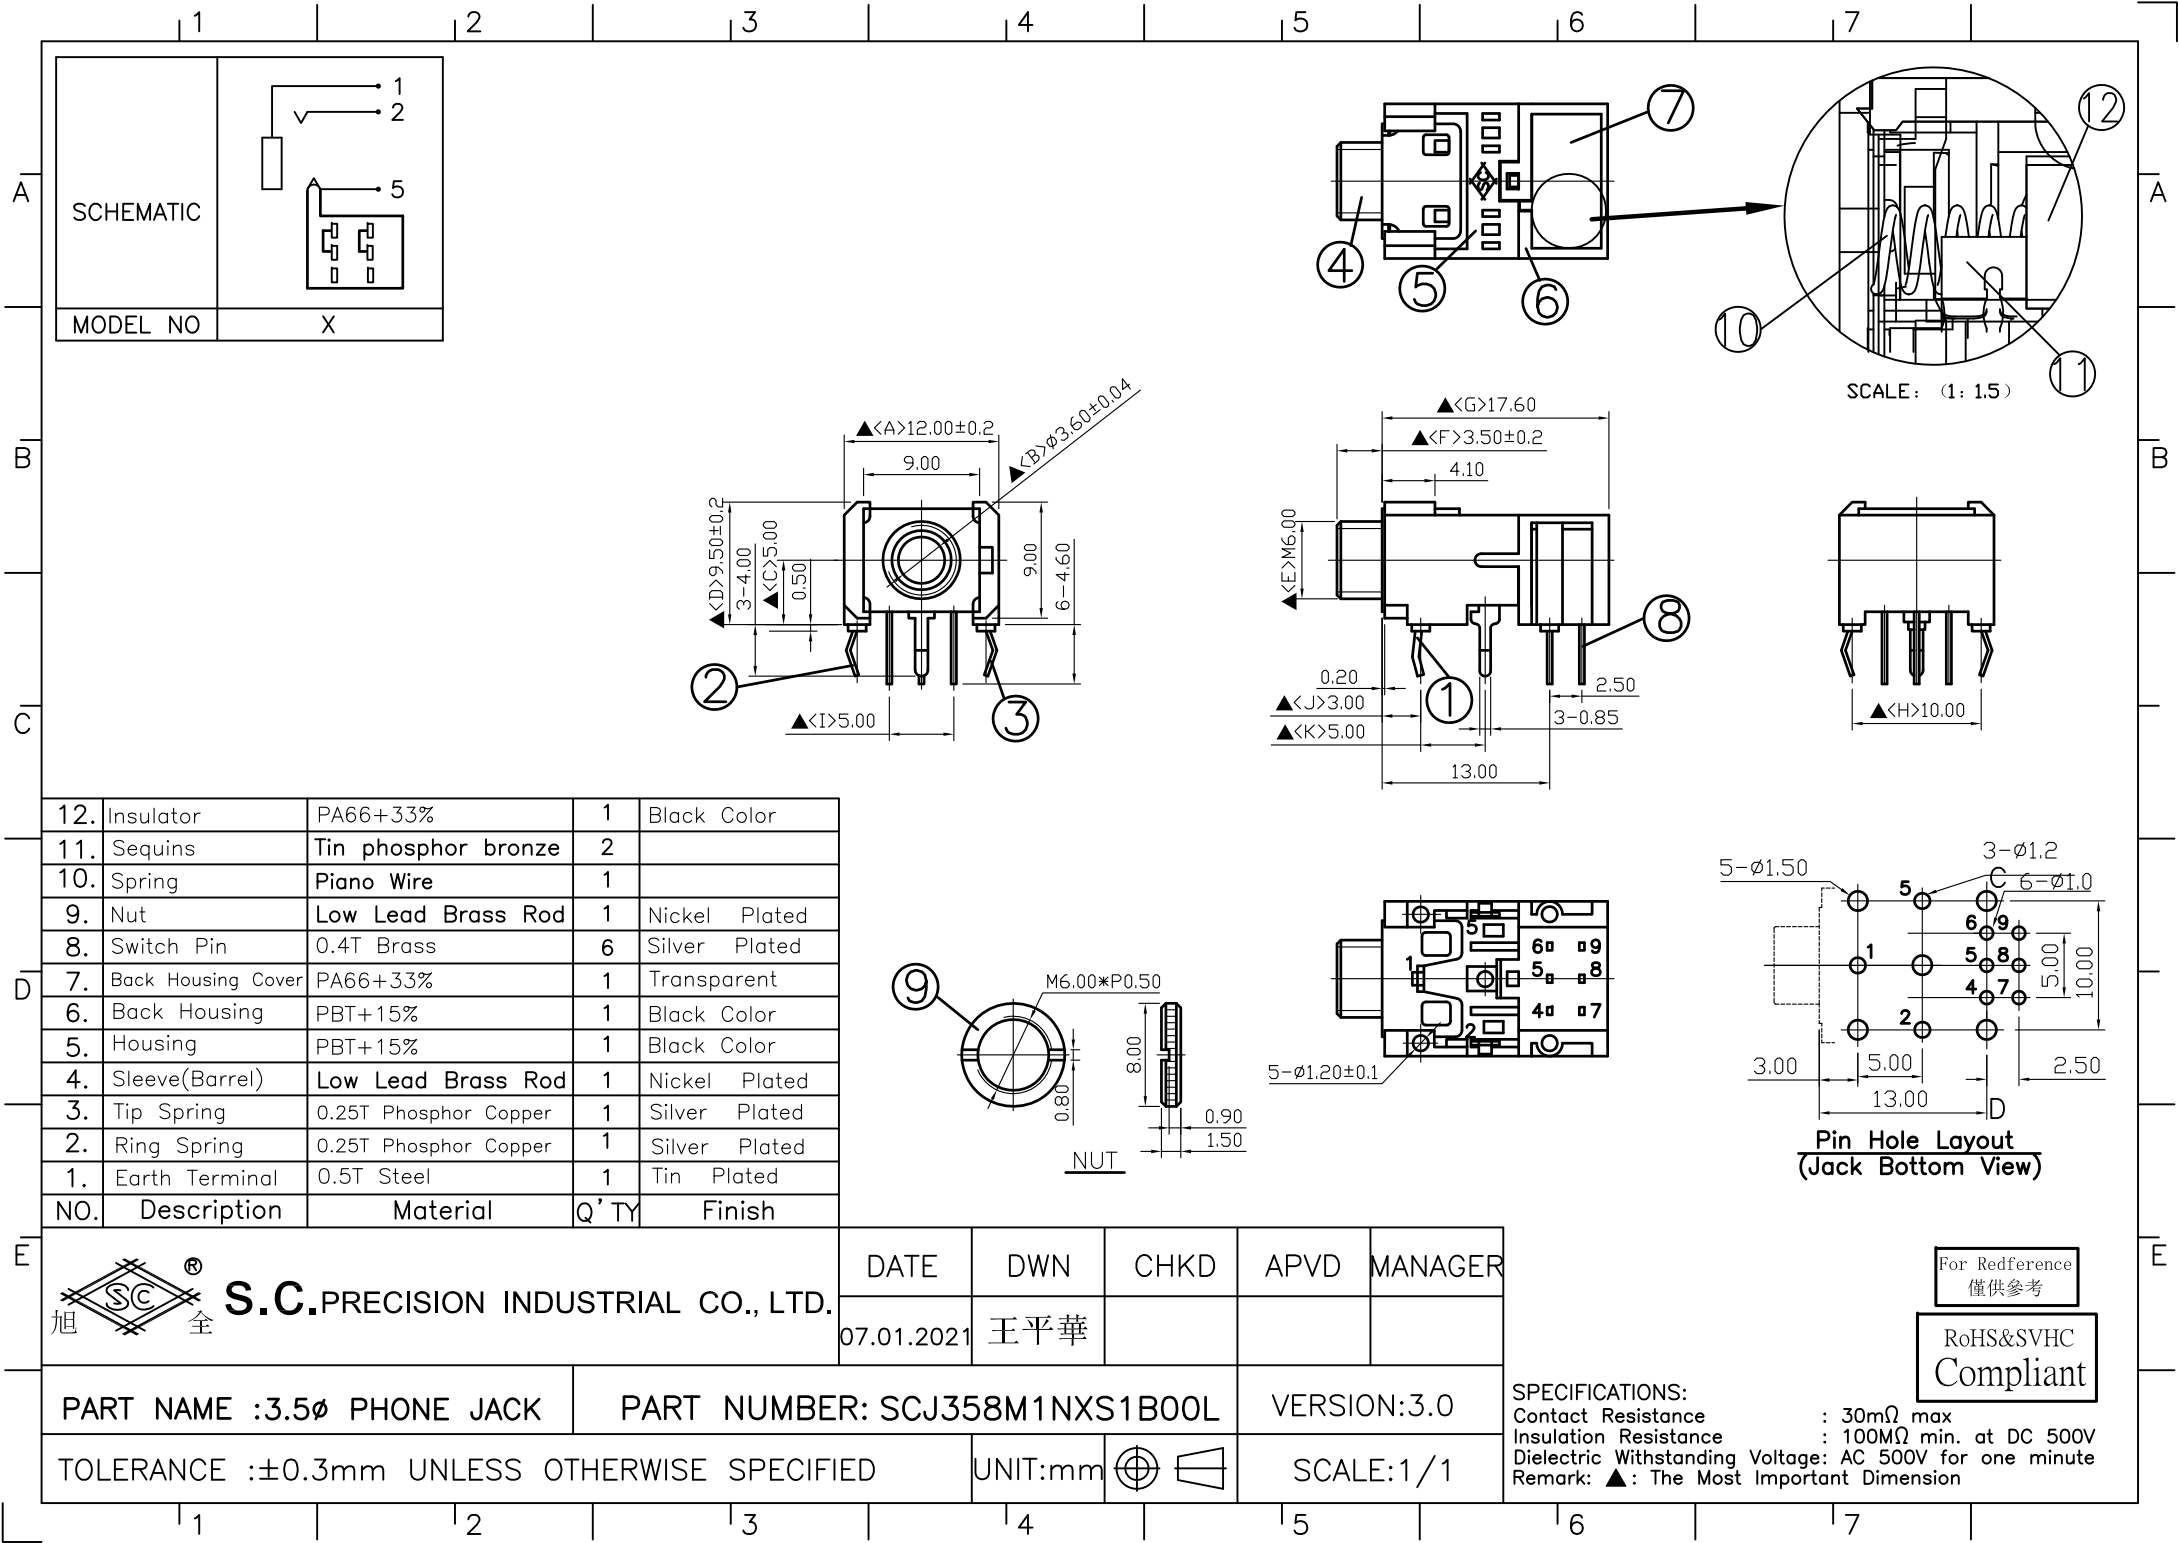

12.	Insulator	PA66+33%	1	Black Color
11.	Sequins	Tin phosphor bronze	2	
10.	Spring	Piano Wire	1	
9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Switch Pin	0.4T Brass	6	Silver Plated
7.	Back Housing Cover	PA66+33%	1	Transparent
6.	Back Housing	PBT+15%	1	Black Color
5.	Housing	PBT+15%	1	Black Color
4.	Sleeve(Barrel)	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Ring Spring	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Steel	1	Tin Plated
NO.	Description	Material	Q' TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	07.01.2021	王平華			

PART NAME :3.5φ PHONE JACK	PART NUMBER: SCJ358M1NXS1B00L	VERSION:3.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant