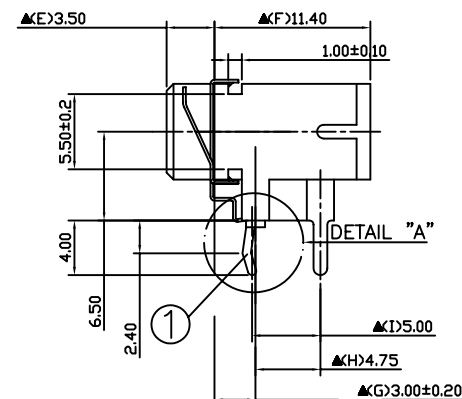
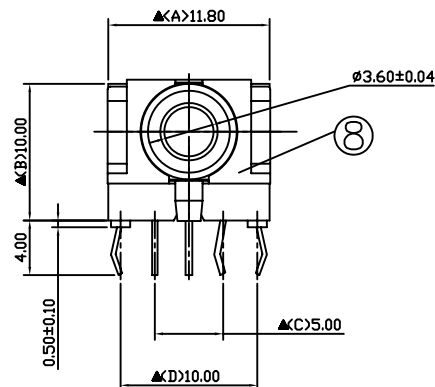




Pin Hole Layout
(Jack Bottom View)

6.	Panel Ground	0.20T Stainless Steel	1	
5.	Cover	PBT	1	701C,Pink Color
4.	Housing	PBT	1	701C,Pink Color
3.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Ring Spring	0.3T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.5T Bronze	1	Silver Plated
NO.	Description	Material	Q 'TY	Finish

DATE	DWN	CHKD	APVD	MANAGER
10.10.2011				

PART NAME : 3.5ø PHONE JACK

PART NUMBER: SCJ363P00US0P04G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SCALE:1 / 1

SPECIFICATIONS:

CONTACT RESISTANCE: Contact Resistance : 30mΩ max
--

Contact Resistance	: 50mΩ max
Insulation Resistance	: 100MΩ min. at DC 500V

Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考