






A

B

C

D

E

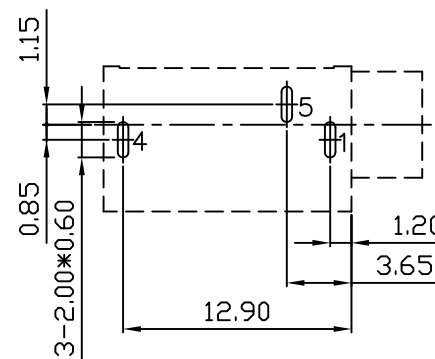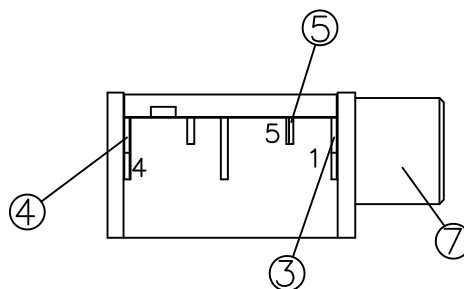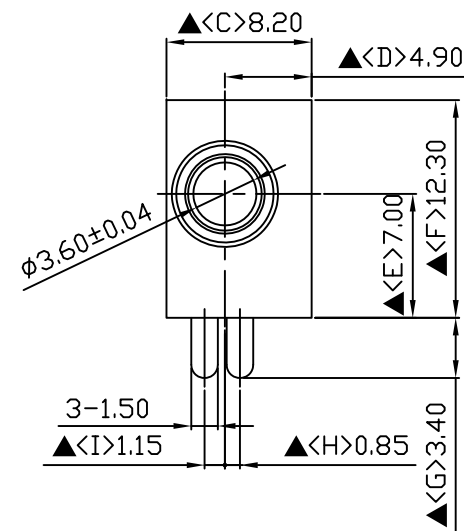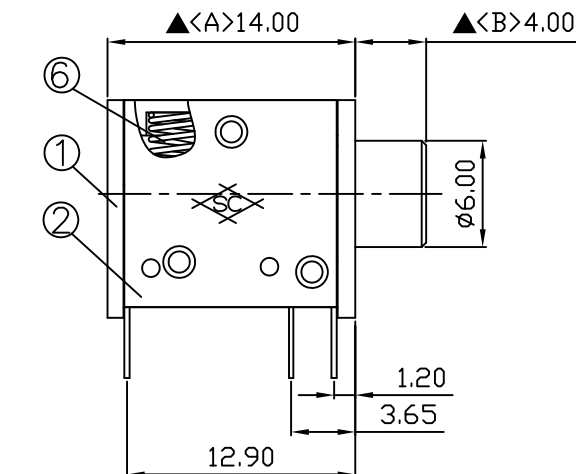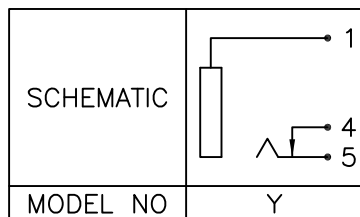

Pin Hole Layout
(Jack Bottom View)

7.	Barrel	Low Lead Brass Rod	1	Nickel Plated
6.	Spring L	Piano Wire	1	
5.	Tip Sping	0.25T Brass	1	Silver Plated
4.	Shunt Terminal	0.3T Brass	1	Silver Plated
3.	Earth Terminal	0.3T Brass	1	Silver Plated
2.	Cover	PBT+15%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
07.09.2021	王平華			


PART NAME :3.5Ø PHONE JACK

PART NUMBER: SCJ368M0NYS0B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: /

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 0.5A , 12V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant

A

B

C

D

E