


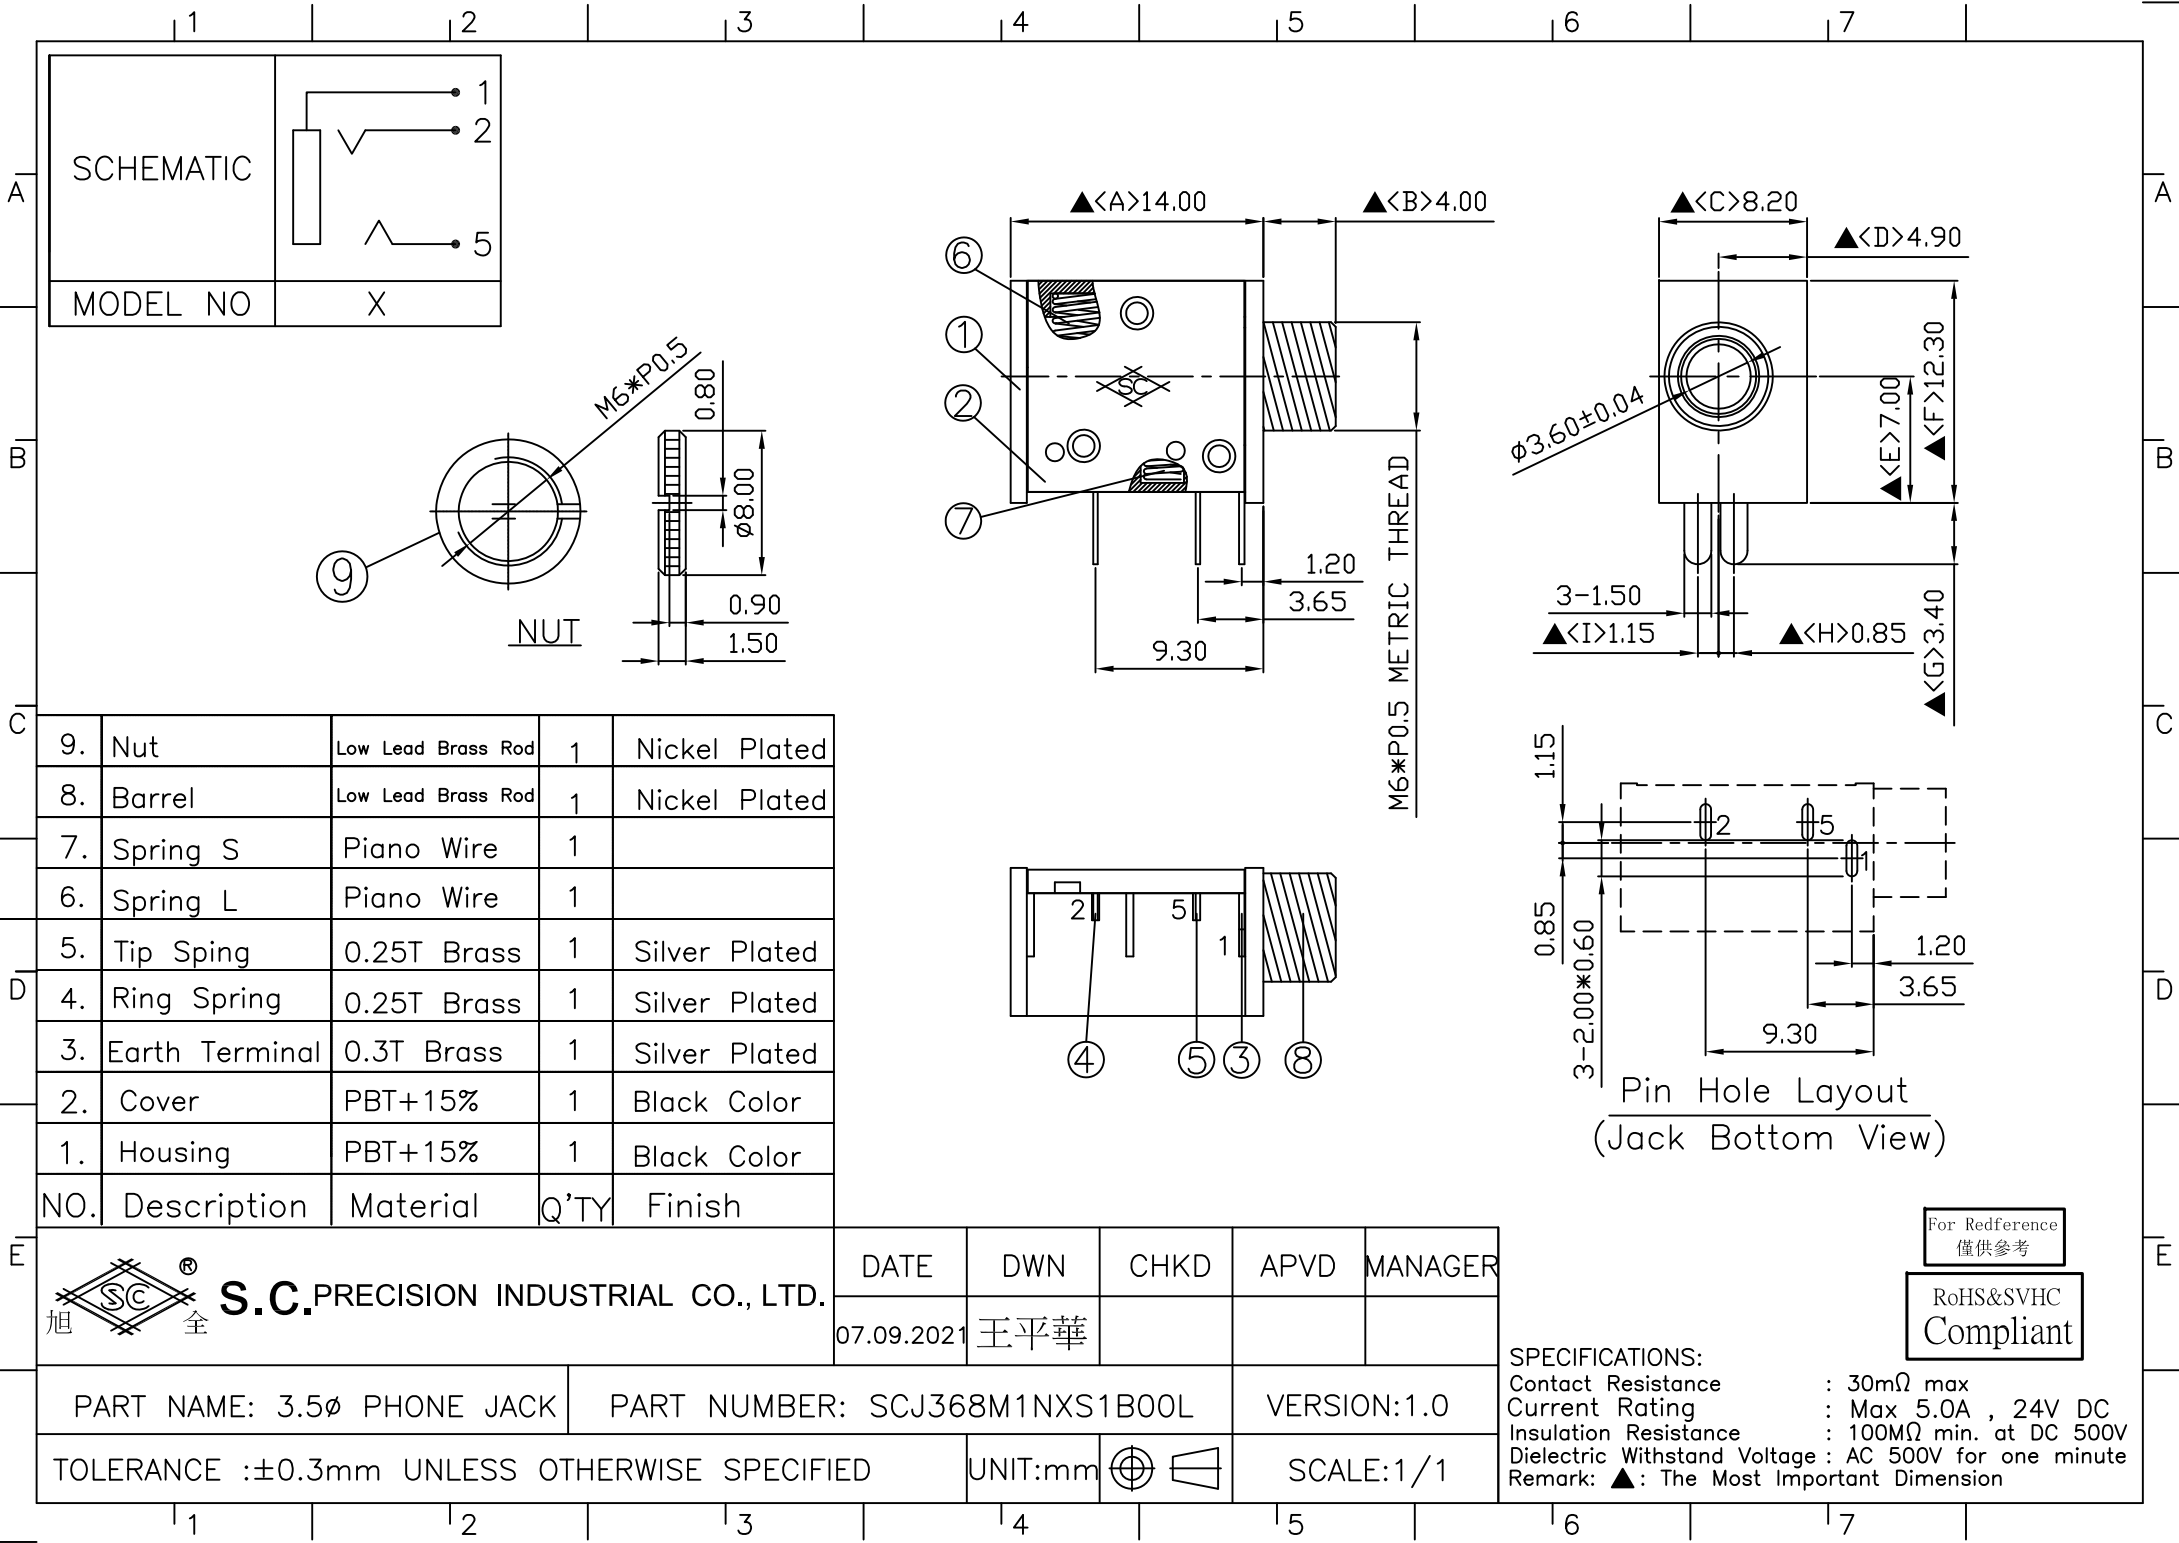

SCHEMATIC

MODEL NO

X

NUT

M6*P0.5 METRIC THREAD

Pin Hole Layout
(Jack Bottom View)

9.	Nut	Low Lead Brass Rod	1	Nickel Plated
8.	Barrel	Low Lead Brass Rod	1	Nickel Plated
7.	Spring S	Piano Wire	1	
6.	Spring L	Piano Wire	1	
5.	Tip Spring	0.25T Brass	1	Silver Plated
4.	Ring Spring	0.25T Brass	1	Silver Plated
3.	Earth Terminal	0.3T Brass	1	Silver Plated
2.	Cover	PBT+15%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE DWN CHKD APVD MANAGER

07.09.2021 王平華

PART NAME: 3.5ø PHONE JACK

PART NUMBER: SCJ368M1NXS1B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension