


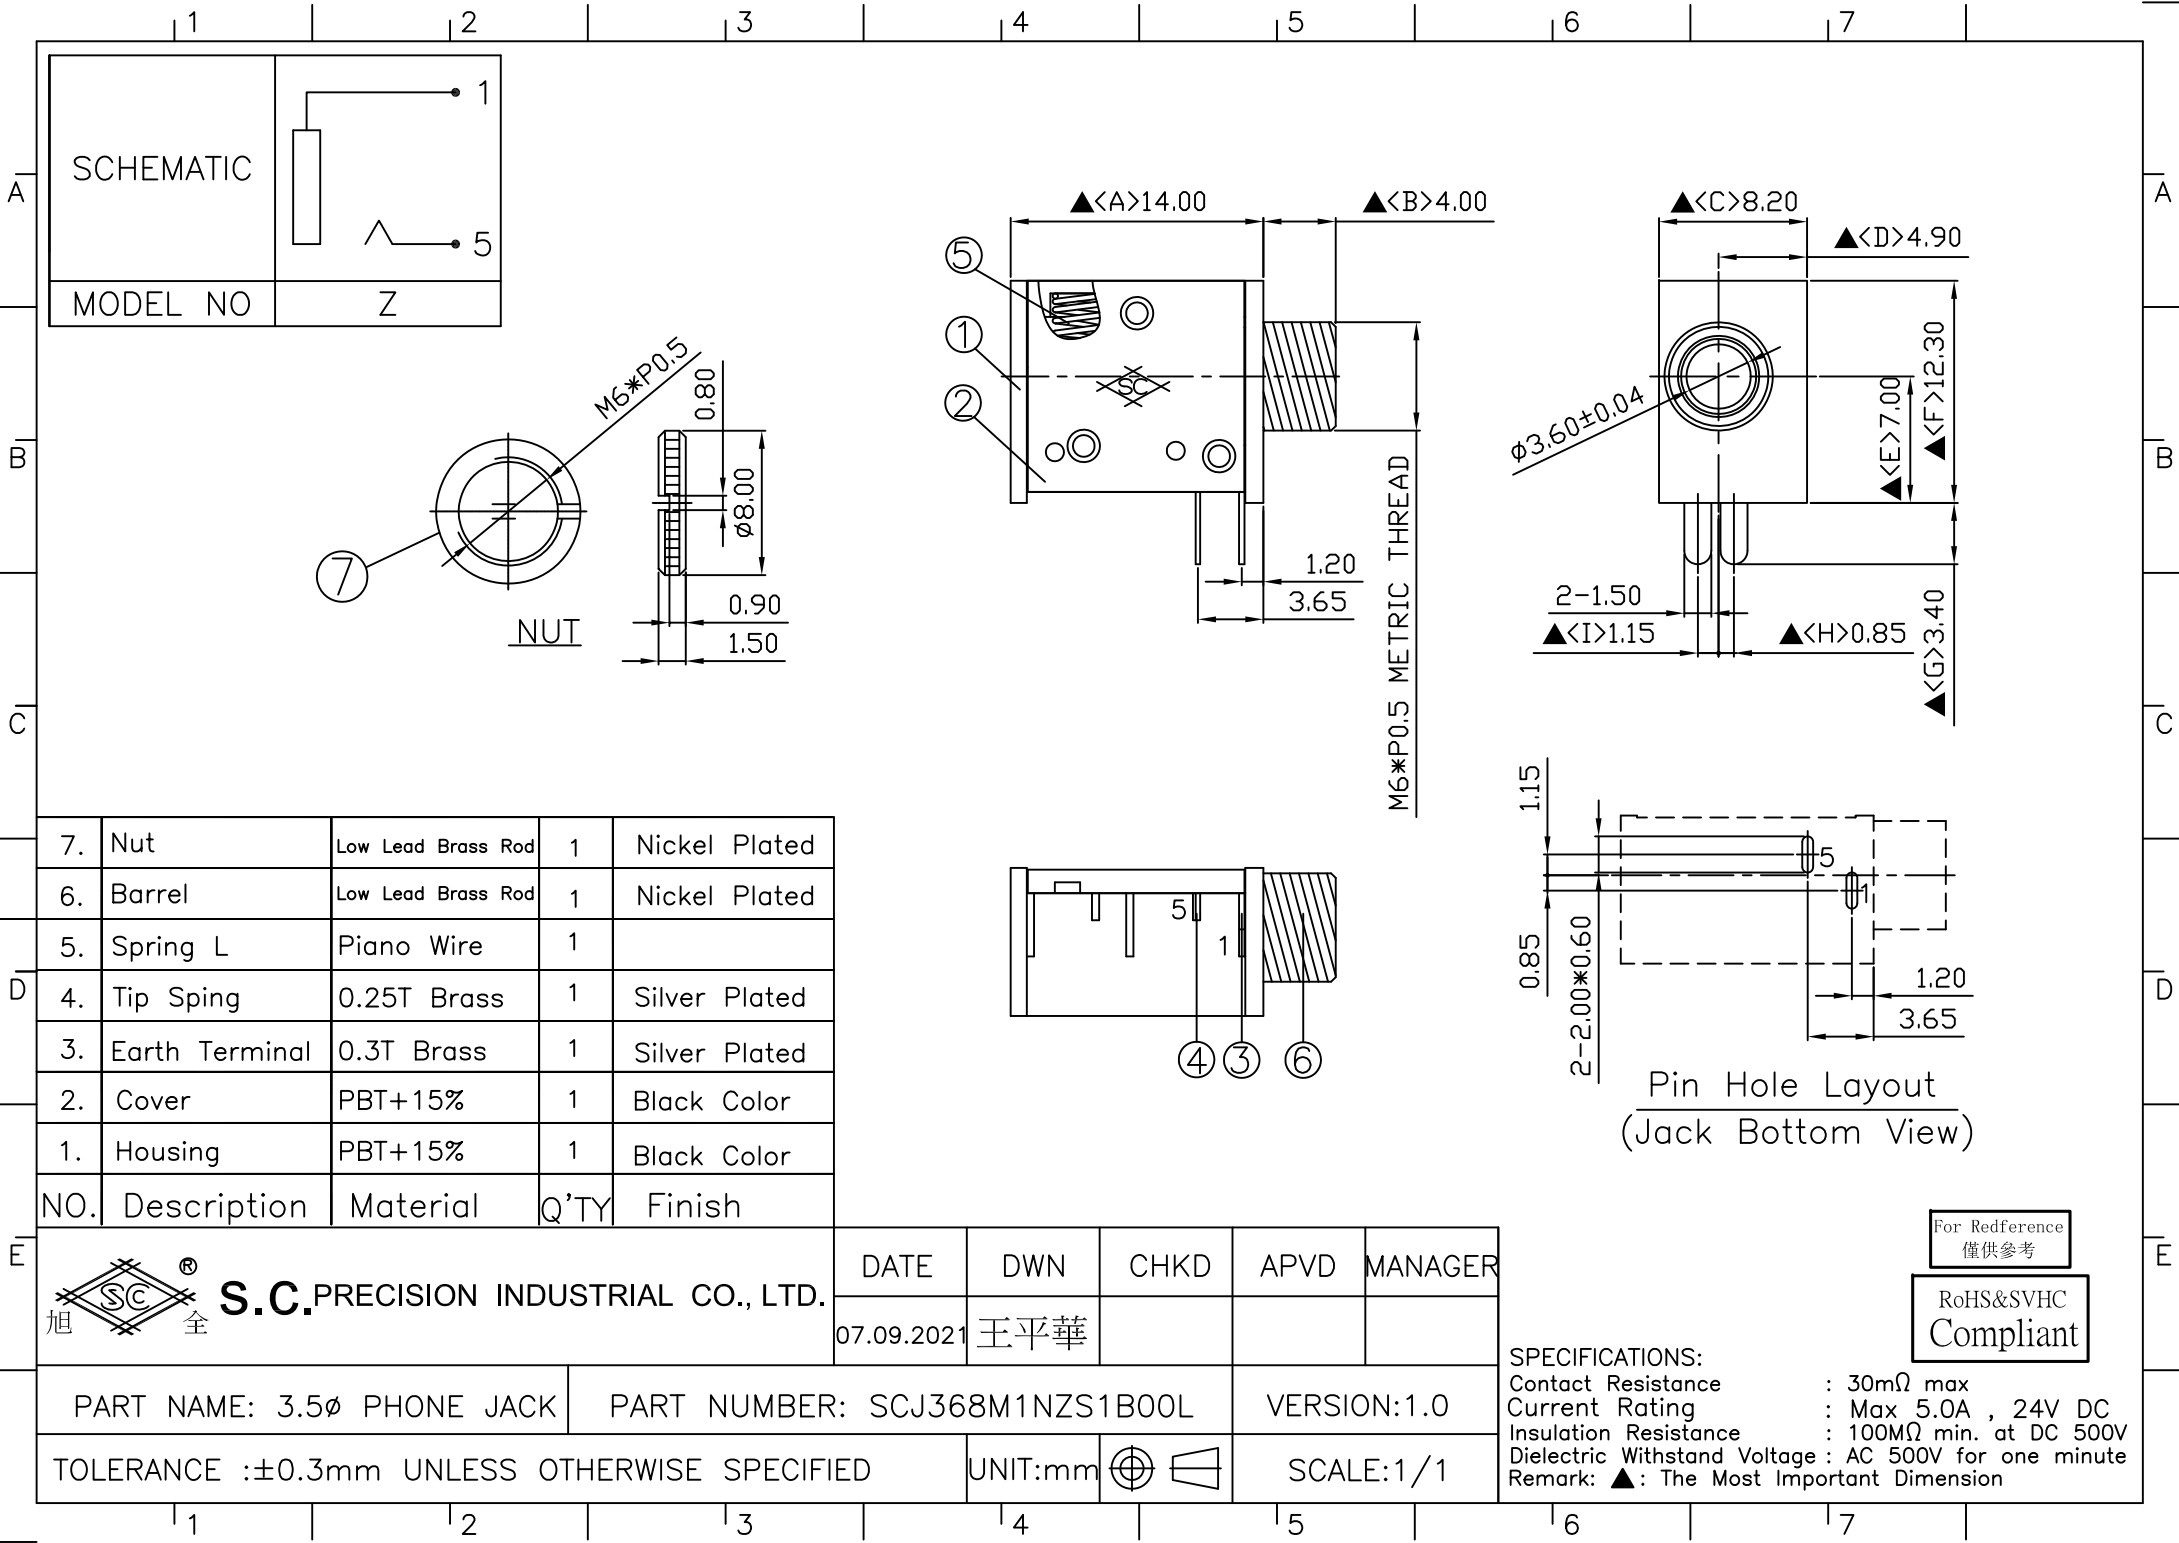

SCHEMATIC

MODEL NO

Z

NUT

M6*P0.5 METRIC THREAD

Pin Hole Layout
(Jack Bottom View)

7.	Nut	Low Lead Brass Rod	1	Nickel Plated
6.	Barrel	Low Lead Brass Rod	1	Nickel Plated
5.	Spring L	Piano Wire	1	
4.	Tip Sping	0.25T Brass	1	Silver Plated
3.	Earth Terminal	0.3T Brass	1	Silver Plated
2.	Cover	PBT+15%	1	Black Color
1.	Housing	PBT+15%	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

07.09.2021

王平華


PART NAME: 3.5ø PHONE JACK

PART NUMBER: SCJ368M1NZS1B00L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

For Redference
僅供參考

RoHS&SVHC
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Current Rating : Max 5.0A , 24V DC
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension