



|           |                                                                                   |
|-----------|-----------------------------------------------------------------------------------|
| SCHEMATIC |  |
| MODEL NO  | V                                                                                 |

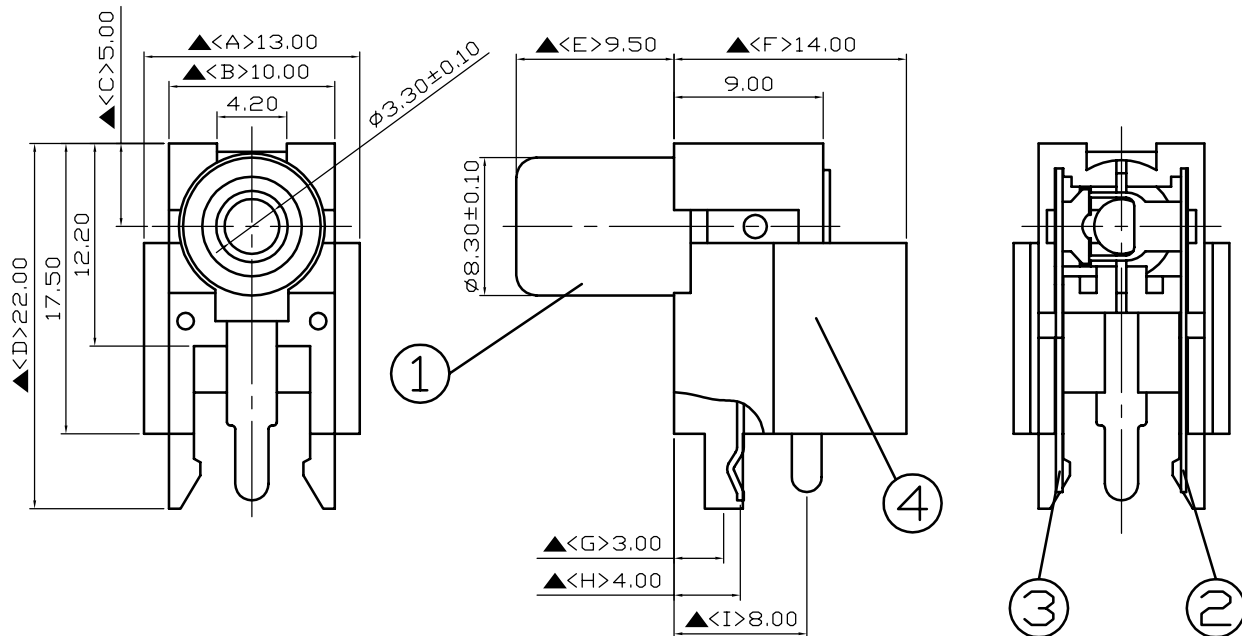

Pin Hole Layout  
(Jack Bottom View)

| 4.  | Housing         | ABS                  | 1    | Yellow Color  |
|-----|-----------------|----------------------|------|---------------|
| 3.  | Break Terminal  | 0.4T Phosphor Bronze | 1    | Silver Plated |
| 2.  | Spring Terminal | 0.3T Phosphor Bronze | 1    | Silver Plated |
| 1.  | Earth Terminal  | 0.4T Brass           | 1    | Nickel Plated |
| NO. | Description     | Material             | Q'TY | Finish        |

RoHS  
Compliant

For Reference  
僅供參考

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension



S.C.

PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

05.24.2006

PART NAME : PIN JACK

PART NUMBER: SCP623VNS400000G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1