
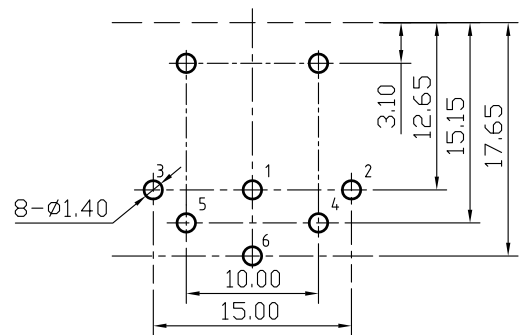

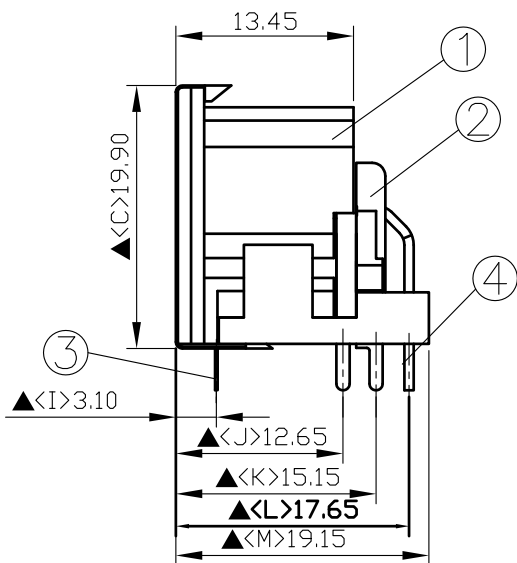
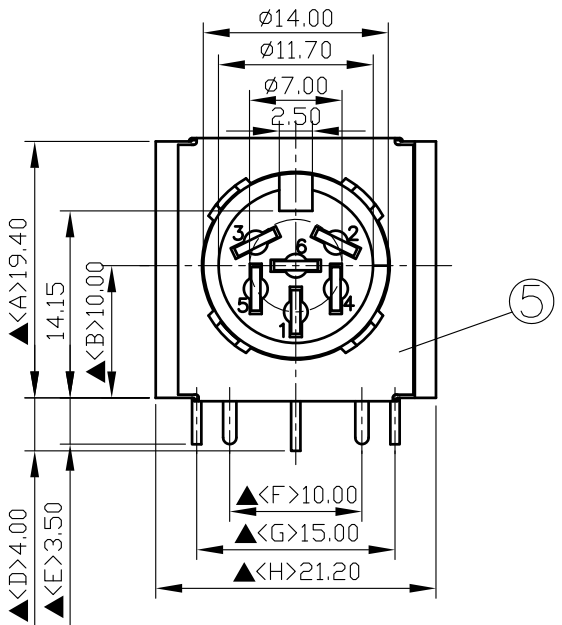


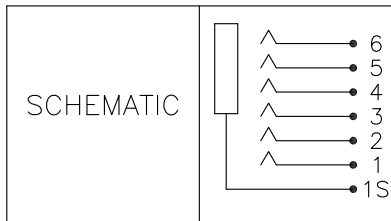

Pin Hole Layout  
(Jack Bottom View)

|     |                |                       |      |                |
|-----|----------------|-----------------------|------|----------------|
| 5.  | Shell          | 0.15T Phosphor Bronze | 1    | Silver Plating |
| 4.  | Terminal       | 0.7T Brass            | 6    | Silver Plating |
| 3.  | Earth Terminal | 0.2T Phosphor Bronze  | 1    | Silver Plating |
| 2.  | Cover          | PBT+30%               | 1    | Black Color    |
| 1.  | Housing        | PBT+30%               | 1    | Black Color    |
| NO. | Description    | Material              | Q'TY | Finish         |

|  |                                     |            |     |      |      |         |
|--|-------------------------------------|------------|-----|------|------|---------|
|  | S.C. PRECISION INDUSTRIAL CO., LTD. | DATE       | DWN | CHKD | APVD | MANAGER |
|  |                                     | 02.22.2022 | 王平華 |      |      |         |

|                                               |                               |              |
|-----------------------------------------------|-------------------------------|--------------|
| PART NAME : DIN JACK                          | PART NUMBER: SCN600S6SS0B000G | VERSION:11.0 |
| TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm                       | SCALE:1/1    |

SPECIFICATIONS:

1. Insulation Resistance : 50MΩ min. at DC 500V
2. Dielectric Strength: : AC 500V for one minute
3. Remark: ▲ : The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Compliant