
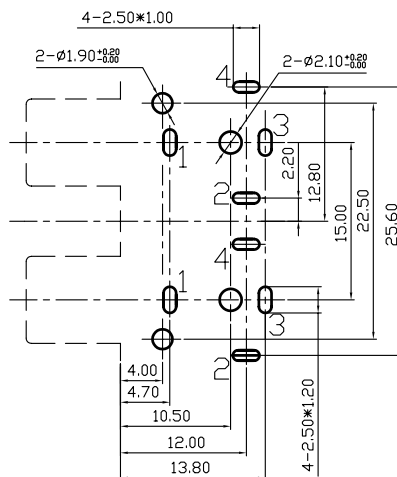

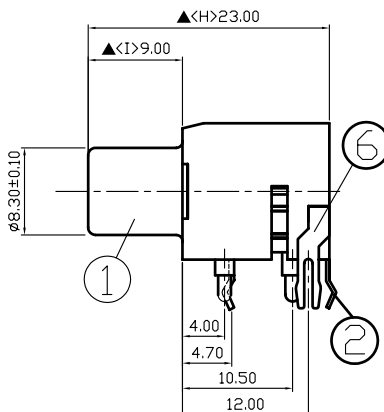
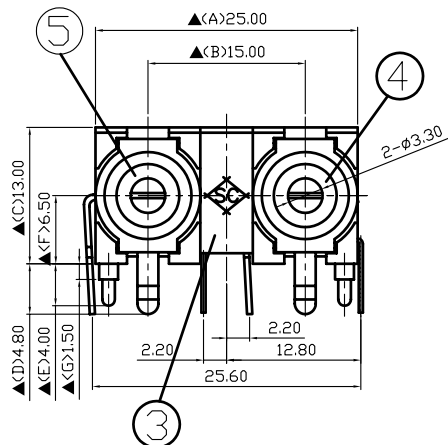





Pin Hole Layout
(Jack Bottom View)

6.	Contact	0.4T Brass	2	Silver Plated
5.	Washer	PBT	1	White Color
4.	Washer	PBT	1	Red Color
3.	Housing	PBT	1	Black Color
2.	Spring Terminal	0.3T Phosphor Bronze	2	Silver Plated
1.	Bushing	0.5T Bronze	2	Nickel Plated
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.15.2005				

PART NAME : PIN JACK

PART NUMBER: SCP6691CNS32000G

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:/