

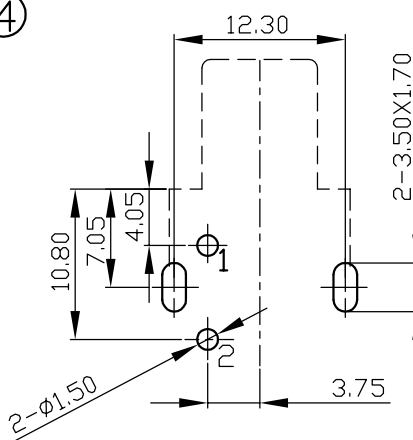
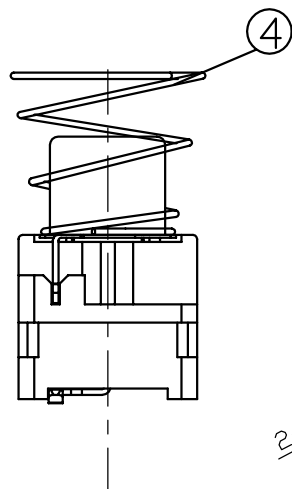

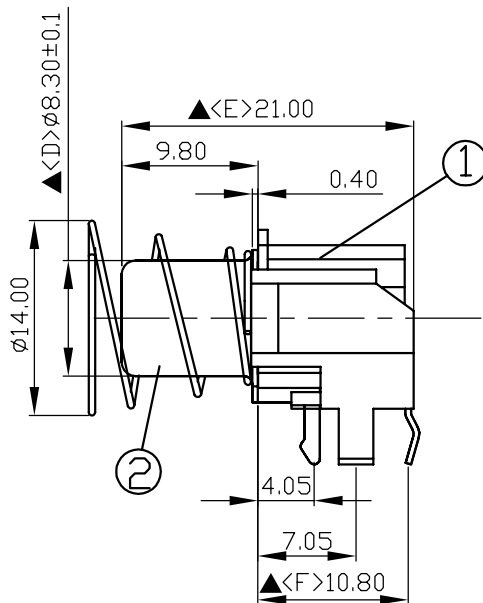
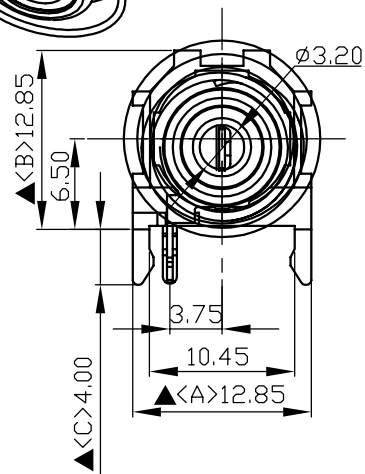


SCHEMATIC	
MODEL NO	U



Pin Hole Layout
(Jack Bottom View)

4.	Spring	SWC $\phi 0.5$	1	Nickel plated
3.	Terminal	0.4T Bronze	1	Gold flash
2.	Outer Contact	0.4T Bronze	1	Gold flash
1.	Housing	PA66+33%G	1	1795C Red Color
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲ : The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

03.17.2006

PART NAME : PIN JACK

PART NUMBER: SCP619UGG2T0000G

VERSION:3.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1