

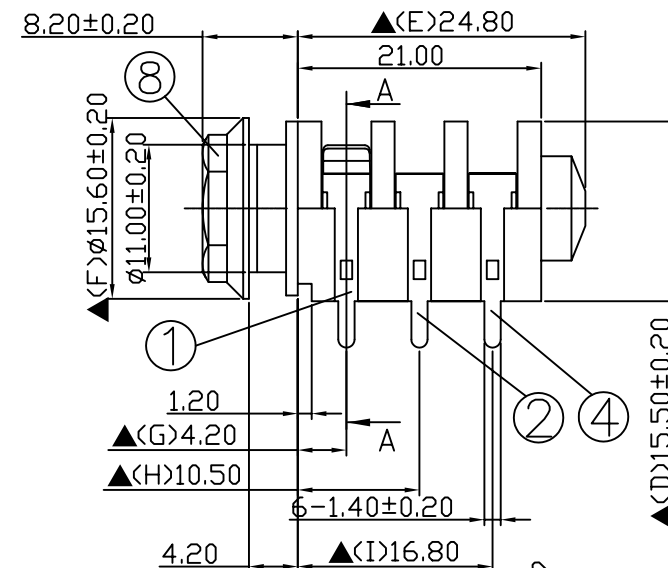
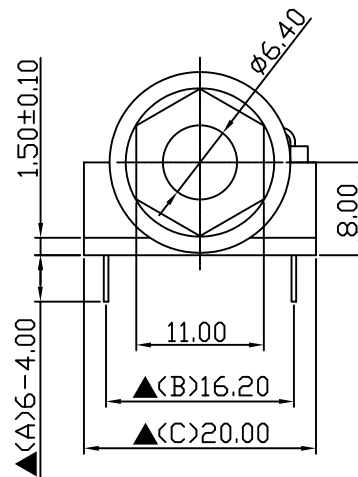
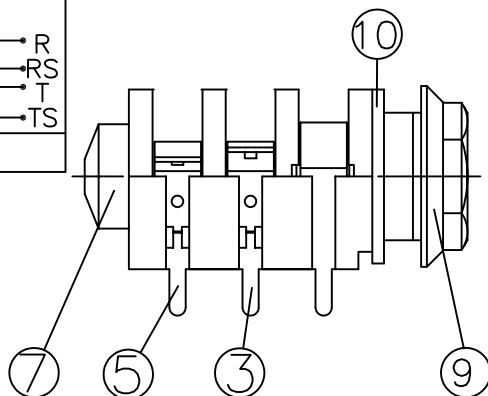


A-A剖面



Pin Hole Layout
(Jack Bottom View)

10.	Washer	PAPER SHEET t1.0	1	Red Color
9.	Bushing	PA66	1	Black Color
8.	Nut-Metal	Brass	1	Nickel Plated
7.	Housing	PA66	1	Black Color
6.	Bottom Spring	0.4T Phosphor Bronze	1	Tin Plated
5.	Tip Shunt	0.4T Bronze	1	Tin Plated
4.	Tip Spring	0.4T Phosphor Bronze	1	Tin Plated
3.	Ring Shunt	0.4T Bronze	1	Tin Plated
2.	Ring Spring	0.4T Phosphor Bronze	1	Tin Plated
1.	Sleeve Spring	0.4T Phosphor Bronze	1	Tin Plated
NO.	Description	Material	Q'TY	Finish

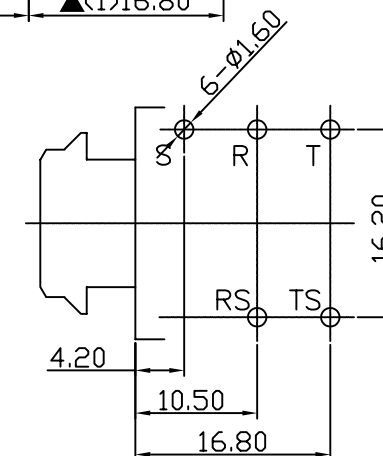

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.01.2012				


PART NAME : 6.3Ø PHONE JACK

PART NUMBER: SCJ647R5NFT0BPOG

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

RoHS
Pb Free Process

For Reference
僅供參考