

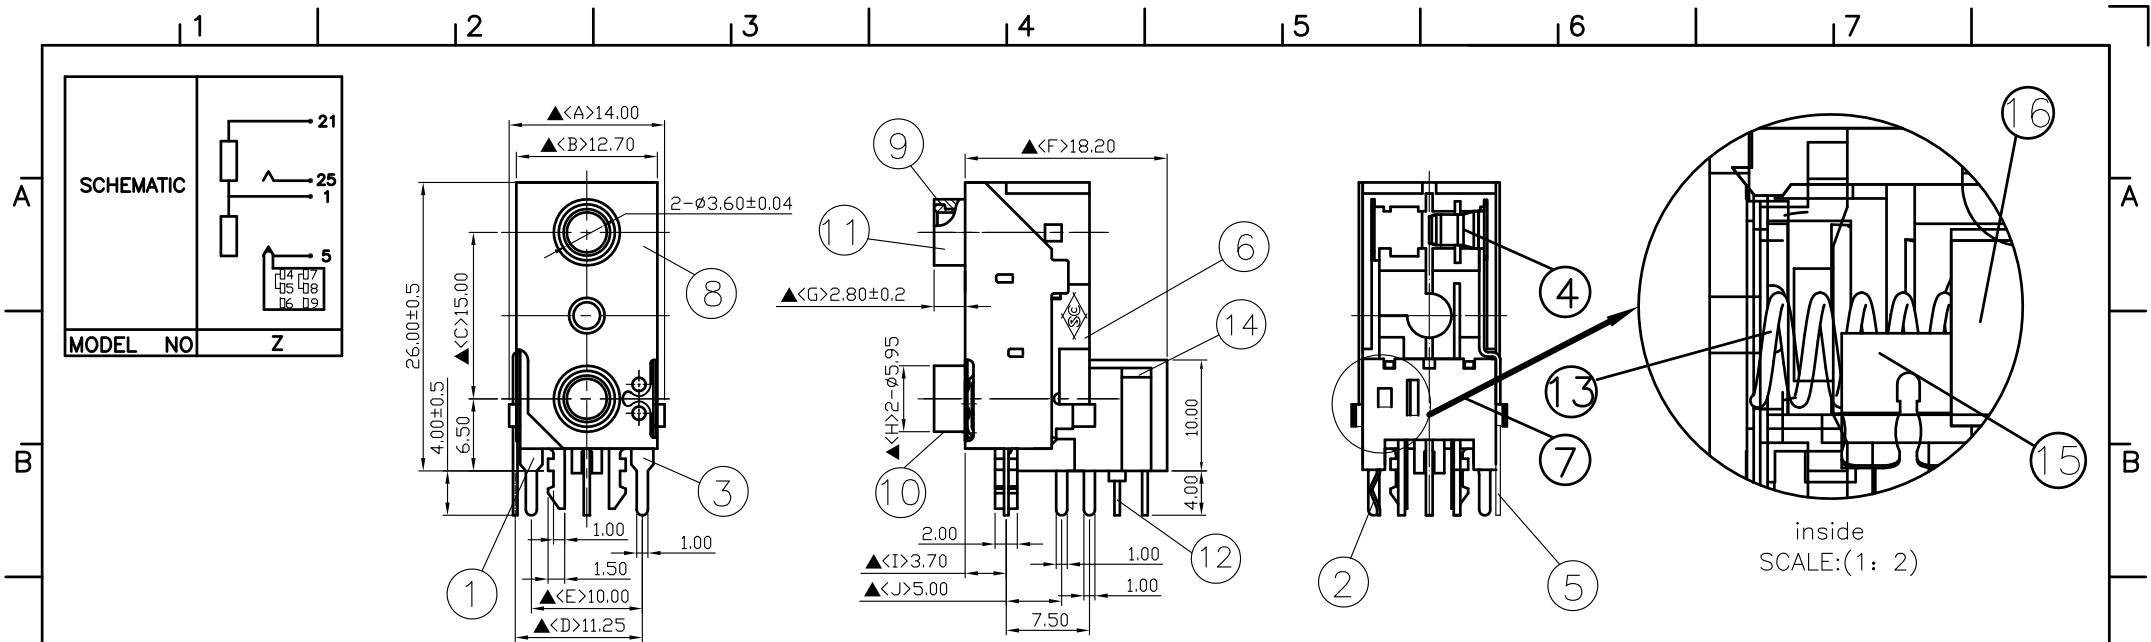


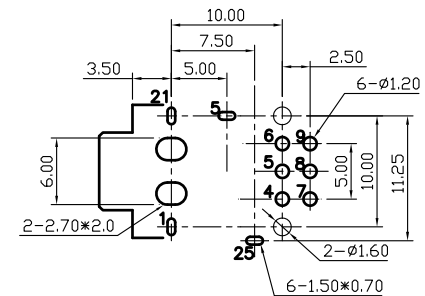

C

16.	Insulator	PA66+33%	1	Black Color
15.	Sequins	Tin Phosphor Bronze	2	
14.	Back Housing Cover	PA66+33%	1	Transparent
13.	Spring	SUS-304	1	
12.	Switch Pin	0.4T Brass	6	Silver Plated
11.	Bushing(TOP)	PBT+30%	1	577C Green Color
10.	Bushing(DOWN)	PBT+30%	1	701C Pink Color
9.	Sleeve(Barrel)	Low Lead Brass Rod	2	Nickel Plated
8.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
7.	Back Housing	PA66+33%	1	Black Color
6.	Housing	PBT	1	Black Color
5.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
4.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
3.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
2.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

D



Pin Hole Layout
(Jack Bottom View)

E

 S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	06.03.2024	王放策			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME : 3.5Ø PHONE JACK

PART NUMBER : SCJ352M5NZSGPN4L

VERSION: 1.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension