


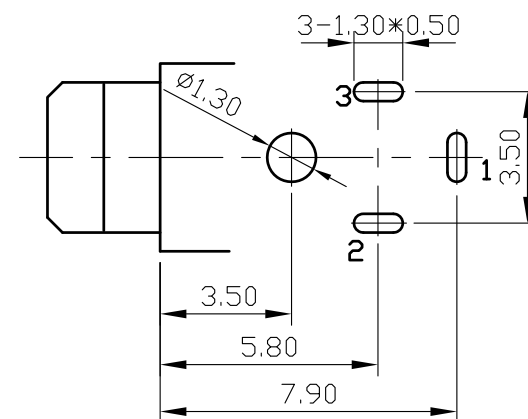
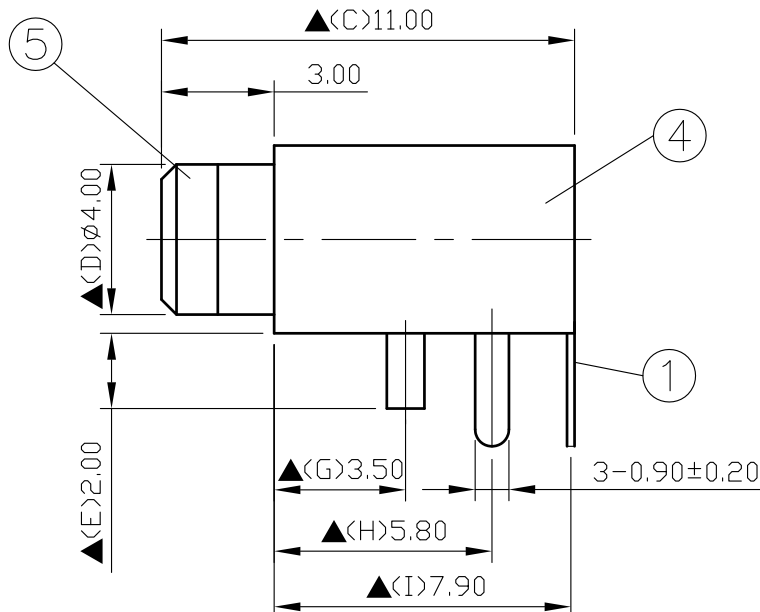


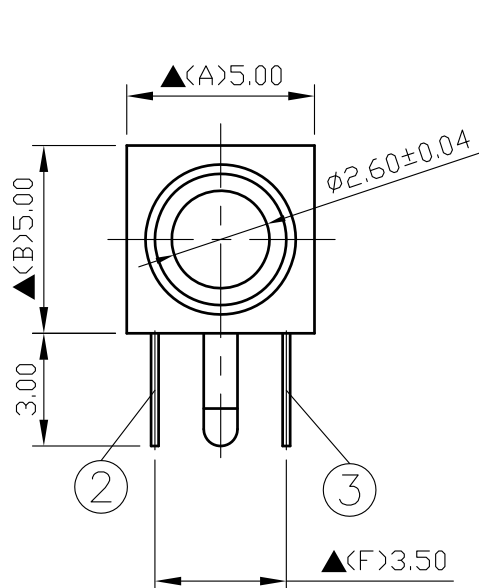

Pin Hole Layout
(Jack Bottom View)



5.	Bushing	Low Lead Brass Rod	1	Nickel Plated
4.	Housing	POM	1	Black Color
3.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

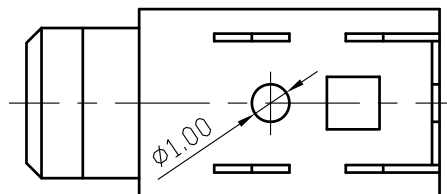

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
08.31.2021	王平華			


PART NAME : 2.5 ϕ PHONE JACK

PART NUMBER: SCJ224R2NHS0B00L

VERSION: 1.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Reference
僅供參考

RoHS&SVHC
Compliant