


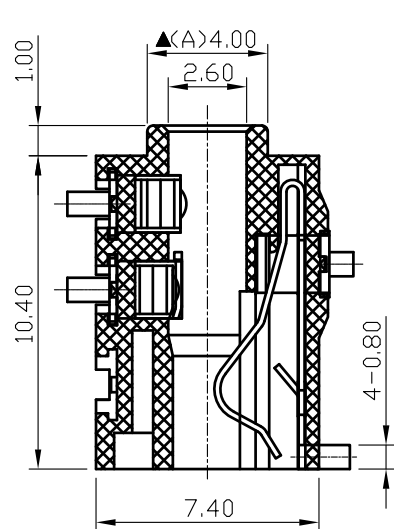

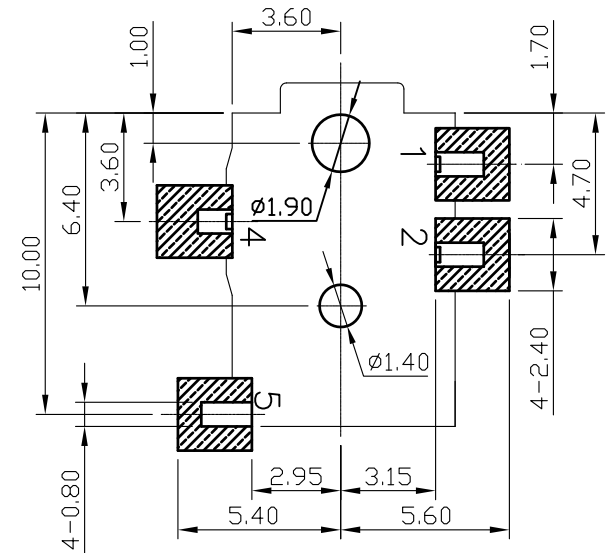


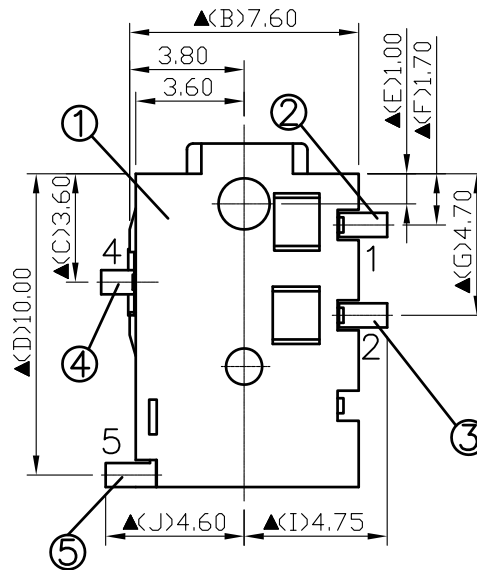

SEC: C-C

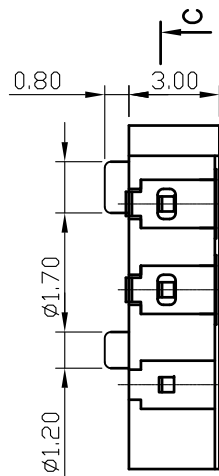

Pin Hole Layout
(Jack Bottom View)

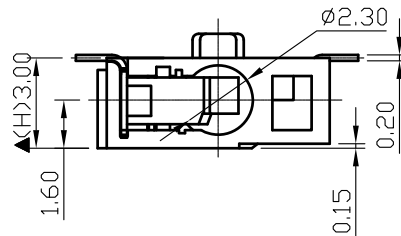

5.	Terminal NO.5	0.2T YCuT	1	Gold Plated
4.	Terminal NO.4	0.3T Brass	1	Gold Plated
3.	Terminal NO.2	0.2T YCuT	1	Gold Plated
2.	Terminal NO.1	0.2T YCuT	1	Gold Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.15.2021	王平華			


PART NAME : 2.5 ϕ PHONE JACK

PART NUMBER: SCJ230P00VG0B00G

VERSION: 4.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Reference
僅供參考

RoHS&SVHC
Pb Free Process