



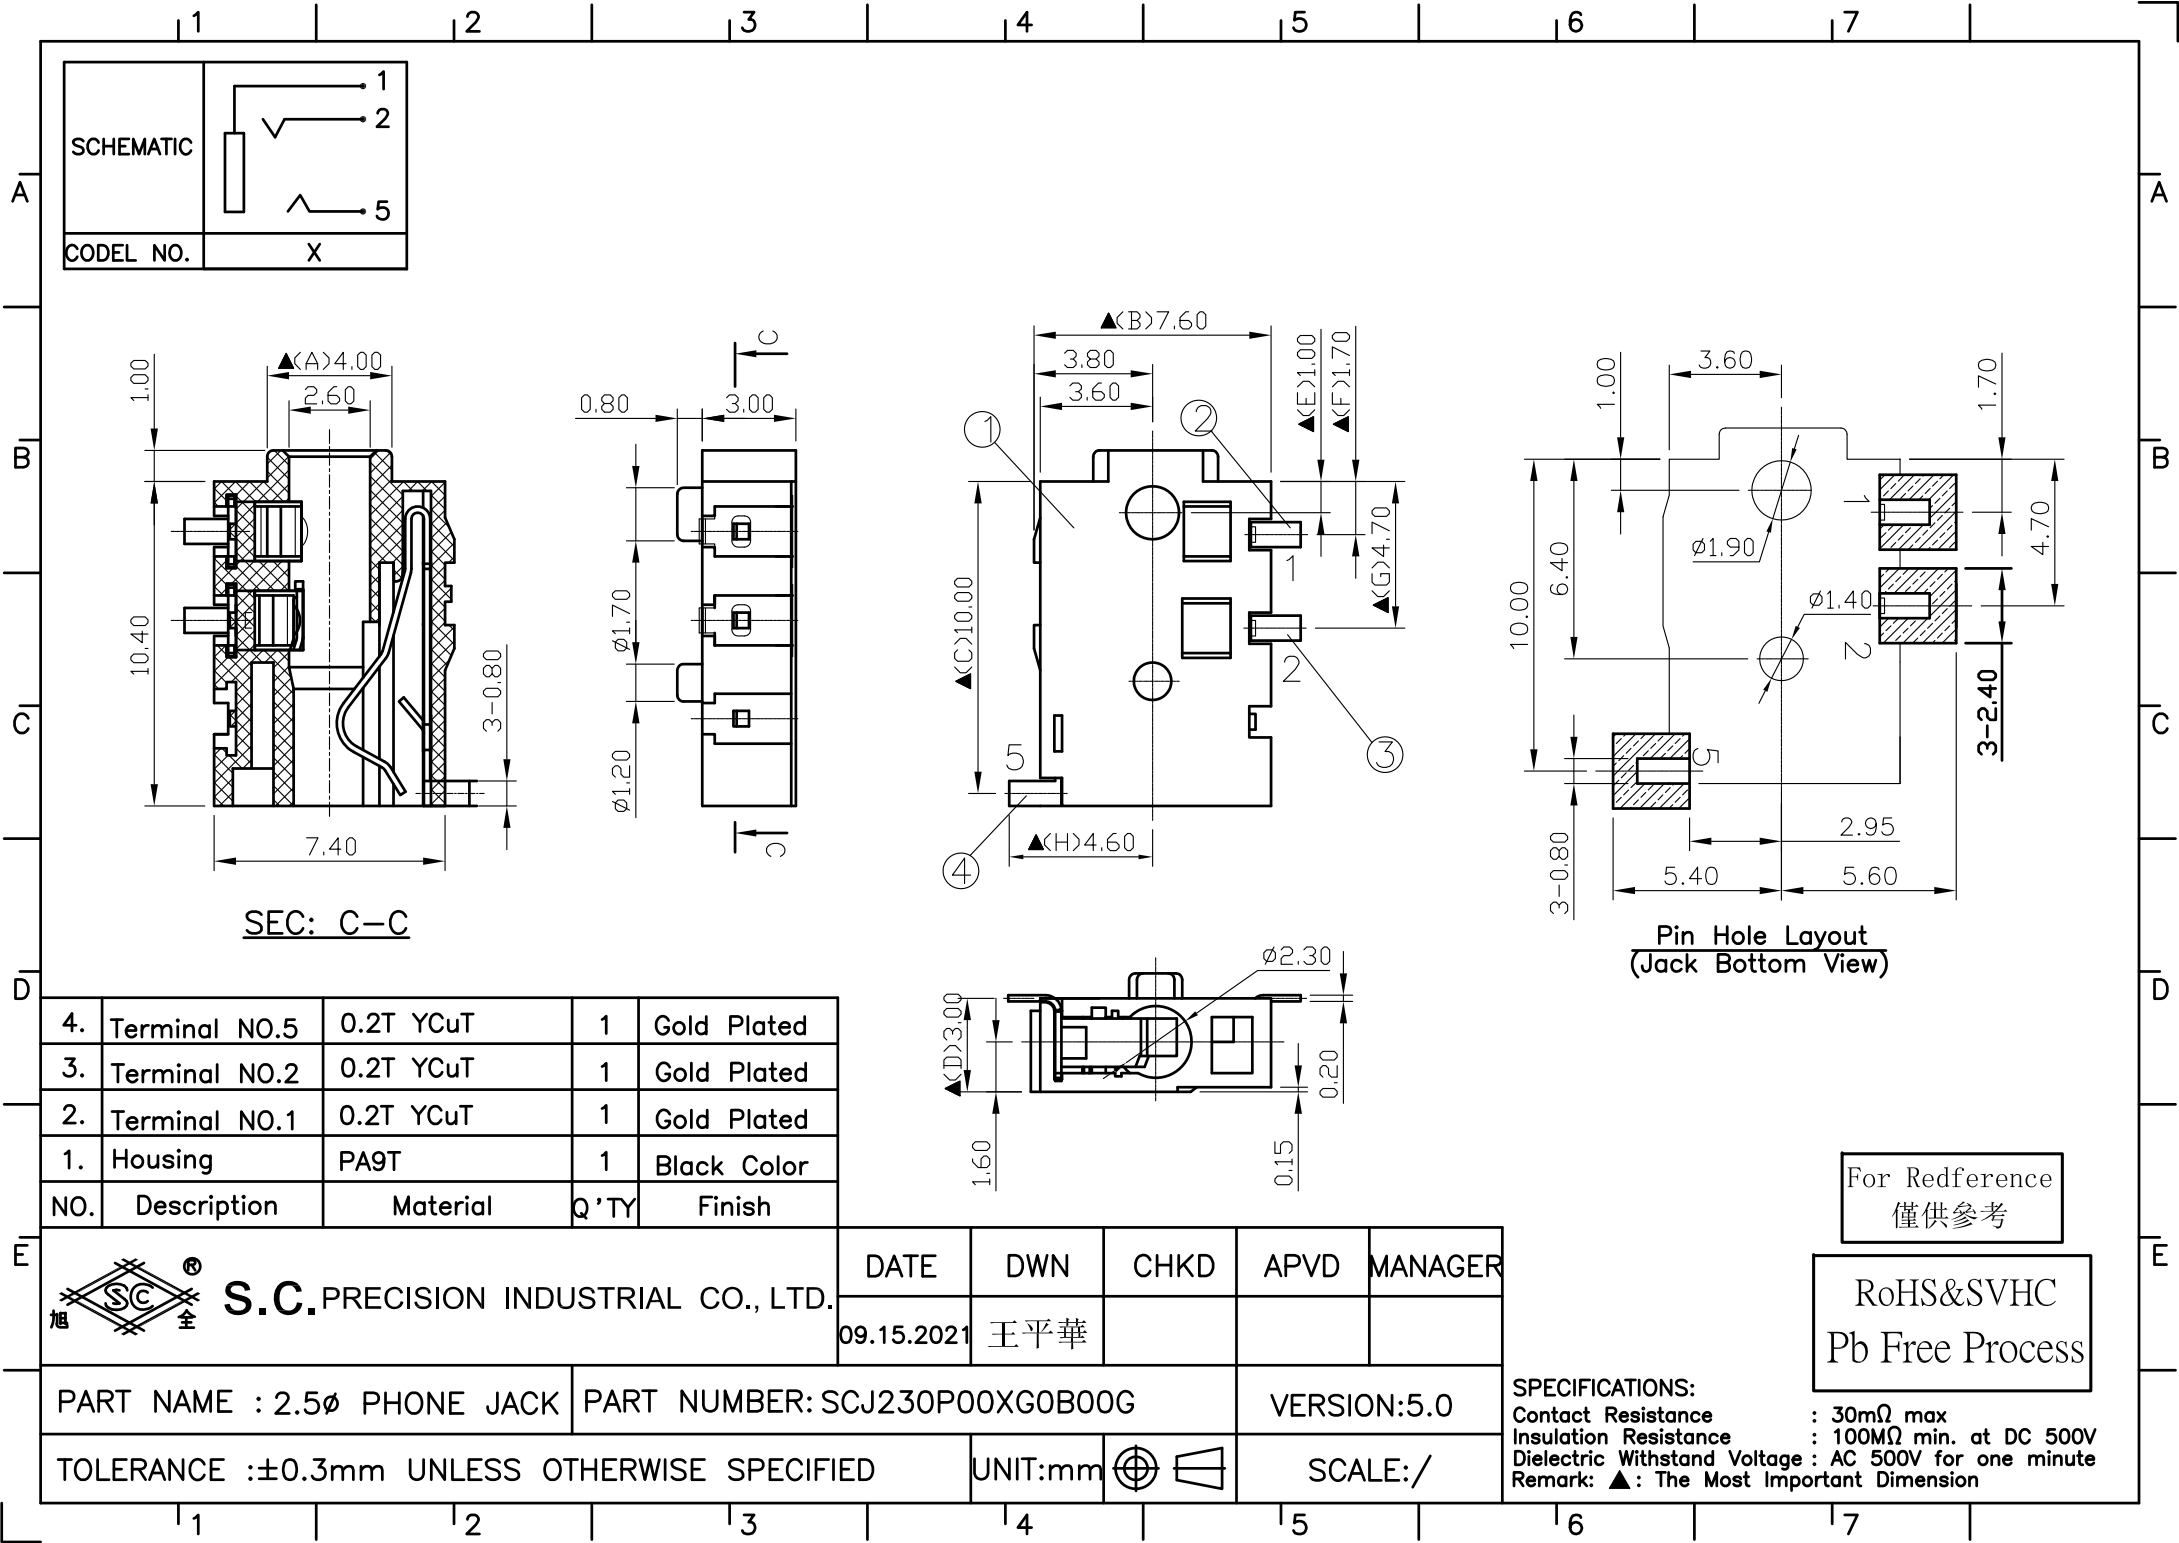




SCHEMATIC

CODEL NO.


X

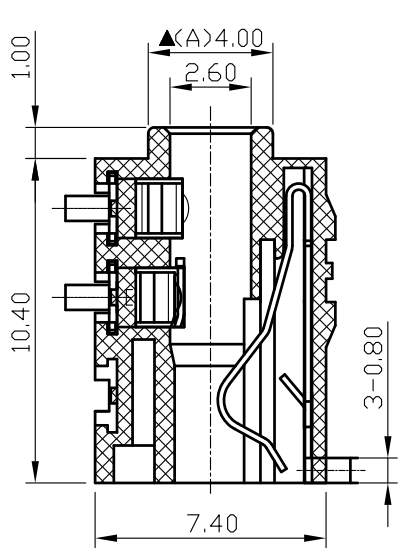

SEC: C-C

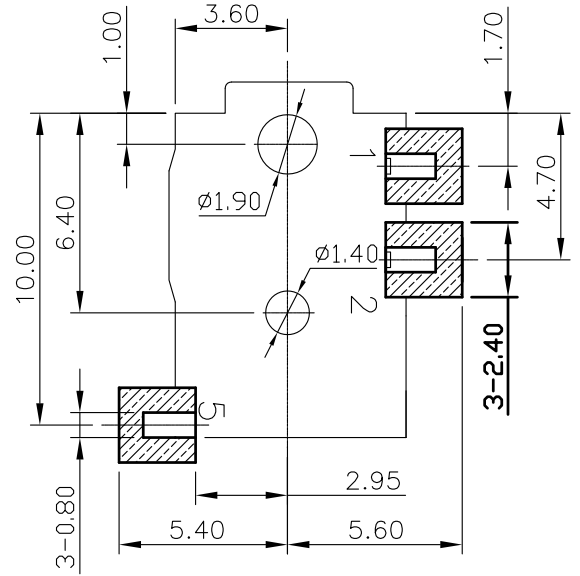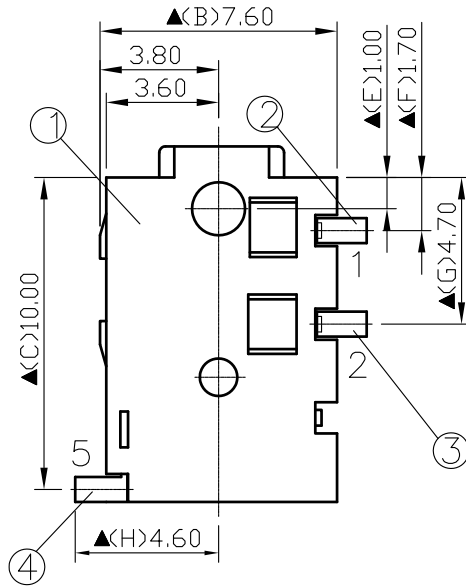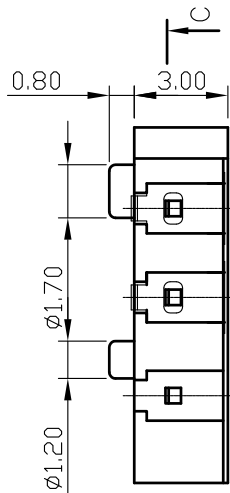

Pin Hole Layout
(Jack Bottom View)

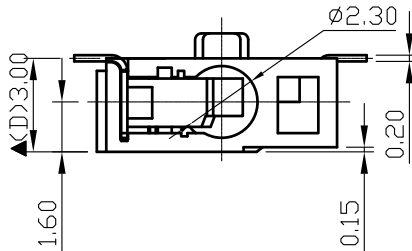

4.	Terminal NO.5	0.2T YCuT	1	Gold Plated
3.	Terminal NO.2	0.2T YCuT	1	Gold Plated
2.	Terminal NO.1	0.2T YCuT	1	Gold Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	09.15.2021	王平華			

PART NAME : 2.5 ϕ PHONE JACK		PART NUMBER: SCJ230P00XG0B00G			VERSION:5.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED				UNIT:mm	SCALE:/

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process