


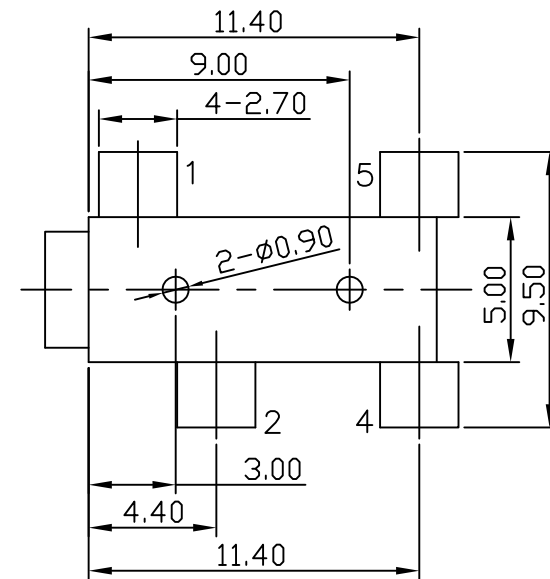


SCHEMATIC	
MODEL NO	V

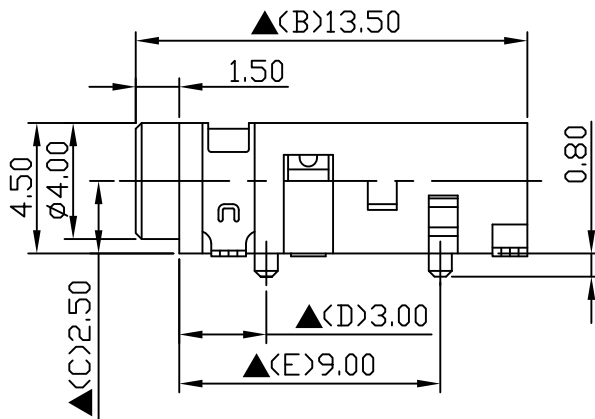

Pin Hole Layout
(Jack Bottom View)

5.	Housing	PA9T	1	Black Color
4.	Tip Spring	0.3T Phosphor Copper	1	SilverPlated
3.	Break Terminal	0.3T Brass	1	SilverPlated
2.	Ring Spring	0.2T Phosphor Copper	1	SilverPlated
1.	Earth Terminal	0.2T Phosphor Copper	1	SilverPlated
NO.	Description	Material	QTY	Finish

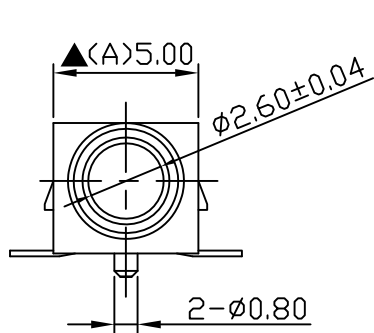

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.15.2021	王平華			


PART NAME : 2.5φ PHONE JACK

PART NUMBER: SCJ232P00VS0B00G

VERSION: 3.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process