


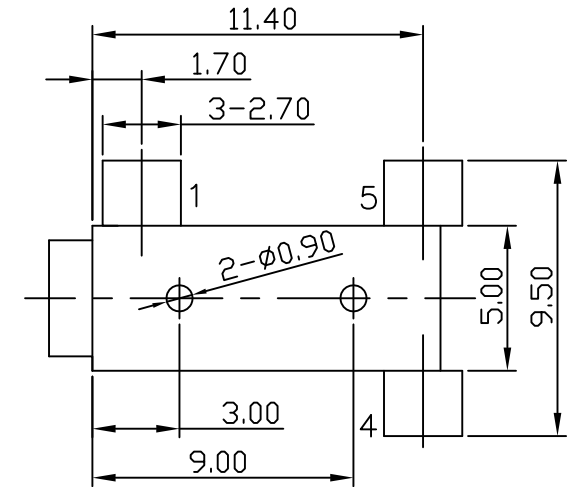
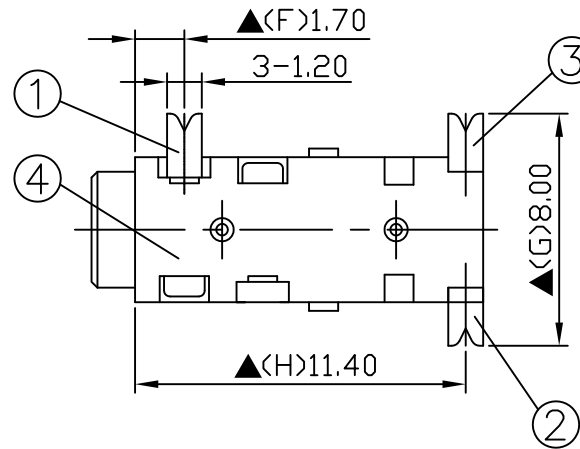


SCHEMATIC	
MODEL NO	Y

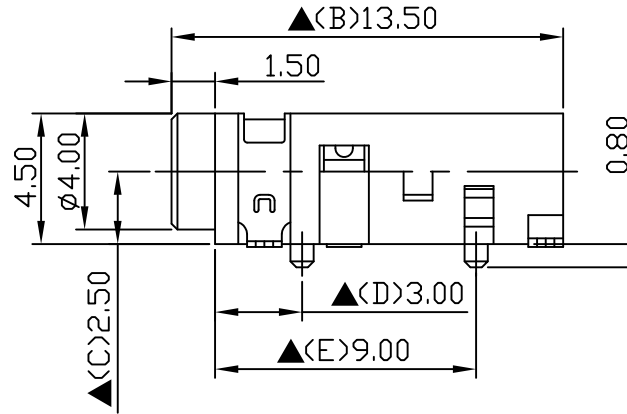

Pin Hole Layout
(Jack Bottom View)

4.	Housing	PA9T	1	Black Color
3.	Tip Spring	0.3T Phosphor Copper	1	Silver Plated
2.	Break Terminal	0.3T Brass	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Copper	1	Silver Plated
NO.	Description	Material	QTY	Finish

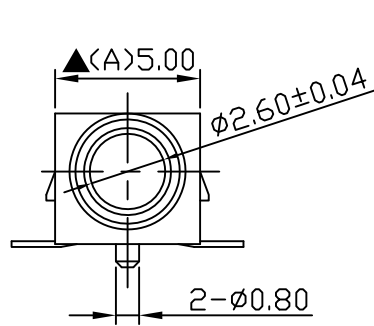

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.15.2021	王平華			


PART NAME : 2.5 ϕ PHONE JACK

PART NUMBER: SCJ232P00YS0B00G

VERSION:4.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: /

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Pb Free Process