



1 2 3 4 5 6 7




A

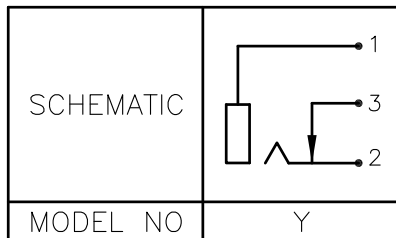

B


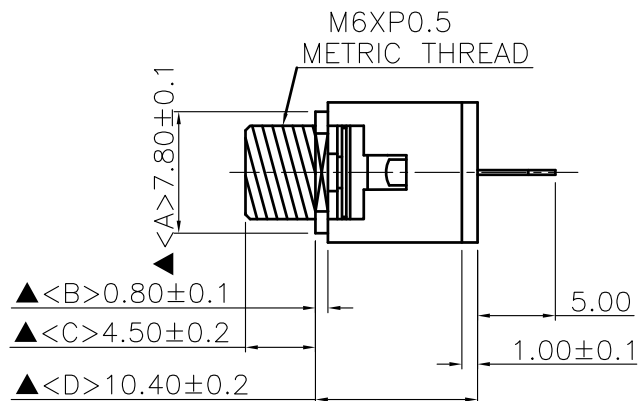


C

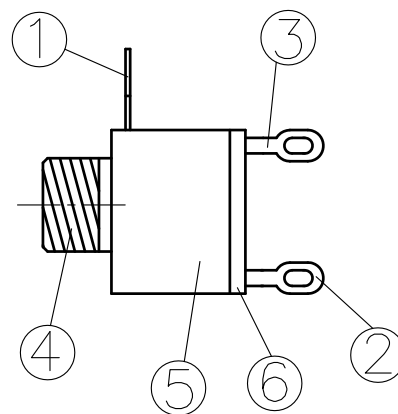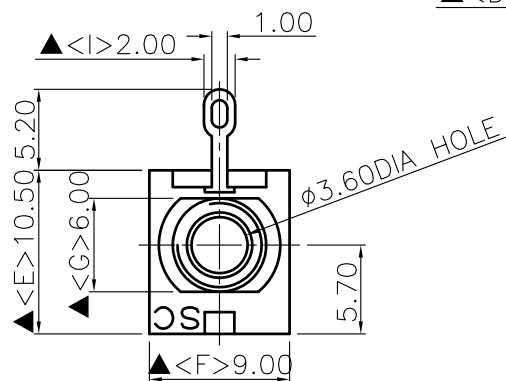

D

7.	NUT	Low lead Brass Rod	1	Nickel Plated
6.	Cover	1.0T Bakelite	1	Natural
5.	Housing	POM	1	Ivory Color
4.	Barrel(W/Thread)	Low lead Brass Rod	1	Nickel Plated
3.	Break Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



E



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.15.2020	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ312M1NYS1I00L

VERSION:1.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: $\triangle$: The Most Important Dimension

1 2 3 4 5 6 7