
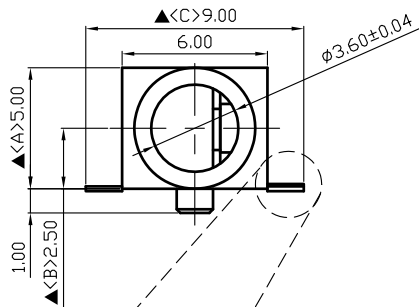

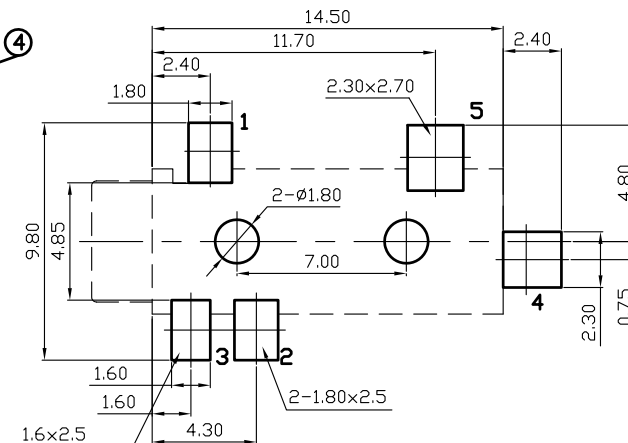
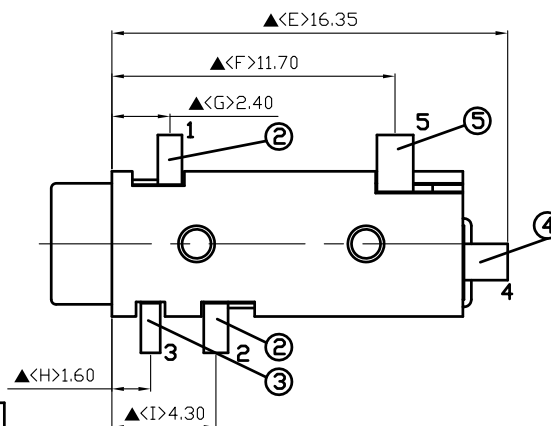



COPLANARITY  
SCALE<2:1>

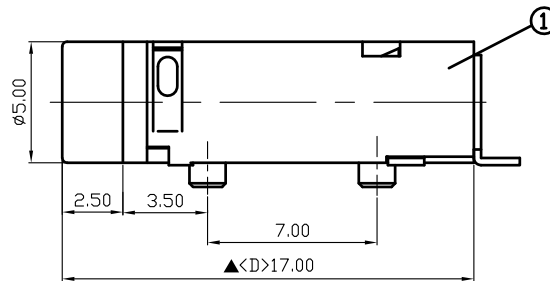

Pin Hole Layout  
(Jack Bottom View)

For Redference  
僅供參考

RoHS&SVHC  
Pb Free Process

|     |                   |                      |      |               |
|-----|-------------------|----------------------|------|---------------|
| 5.  | Tip Spring        | 0.3T Phosphor Bronze | 1    | Silver Plated |
| 4.  | Shunt Terminall B | 0.3T Bronze          | 1    | Silver Plated |
| 3.  | Shunt Terminall A | 0.2T Bronze          | 1    | Silver Plated |
| 2.  | Earth Terminall   | 0.2T YCuT            | 2    | Silver Plated |
| 1.  | Housing           | PA9T                 | 1    | Black Color   |
| NO. | Description       | Material             | Q'TY | Finish        |



S.C. PRECISION INDUSTRIAL CO., LTD.

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 09.28.2020 | 王平華 |      |      |         |

PART NAME:3.5 $\phi$  PHONE JACK

PART NUMBER:SCJ316P00US0B00G

VERSION:6.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance :30m $\Omega$  max  
Insulation Resistance :100M $\Omega$  min.at DC500V  
Dielectric Withstand Voltage:AC 500V for one minute  
Remark:▲:The Most Important Dimension