



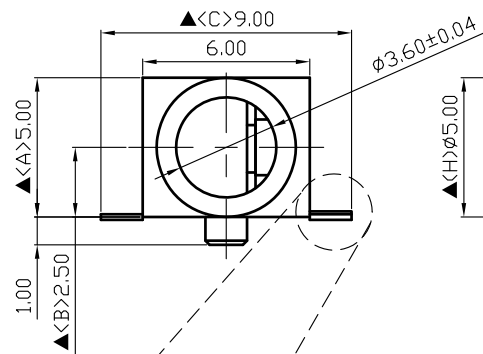
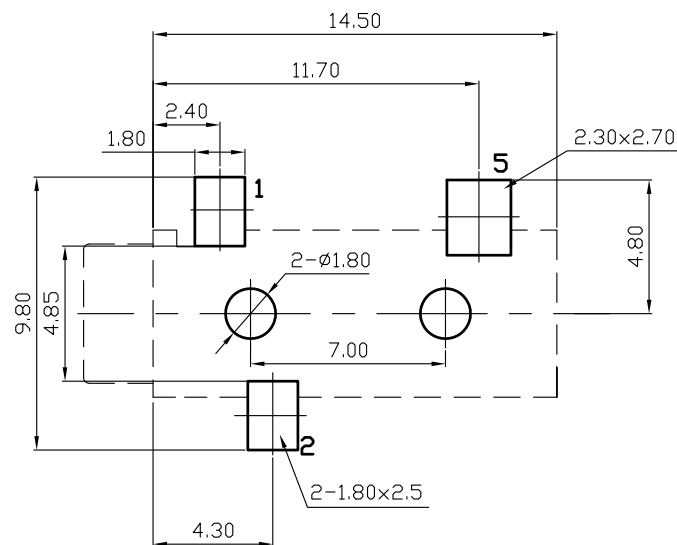


SCHEMATIC	
MODEL NO	X

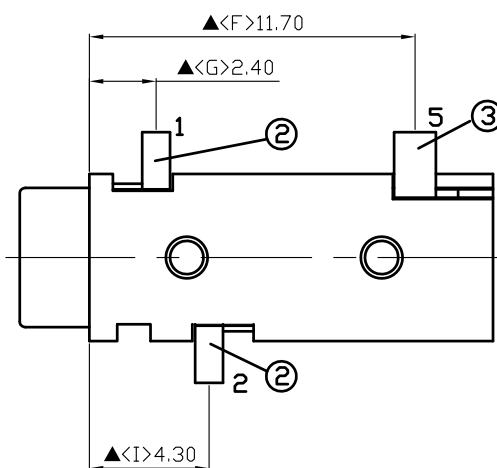

COPLANARITY
SCALE<2:1>

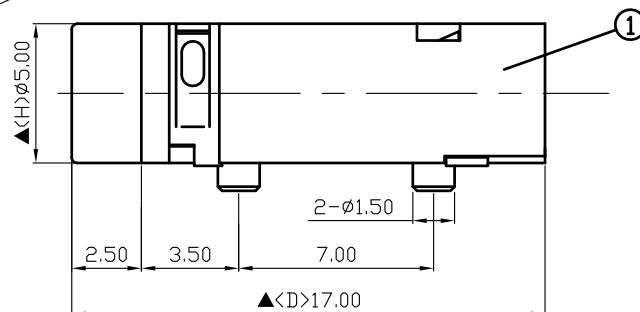

Pin Hole Layout
(Jack Bottom View)

3.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Earth Terminal	0.2T YCuT	2	Silver Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.28.2020	王平華			

PART NAME:3.5 ϕ PHONE JACK

PART NUMBER:SCJ316P00XS0B00G

VERSION:5.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Pb Free Process