

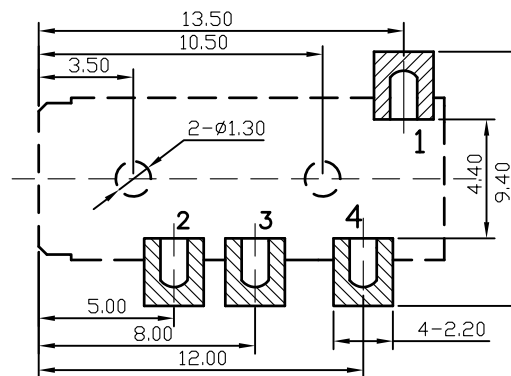
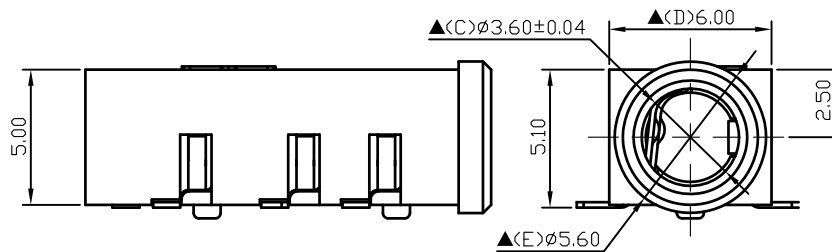
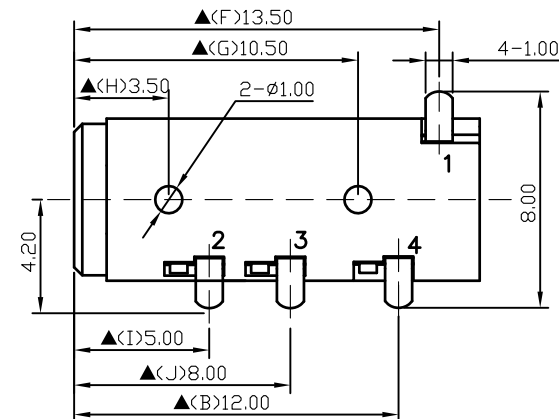


SCHEMATIC	
MODEL NO	L

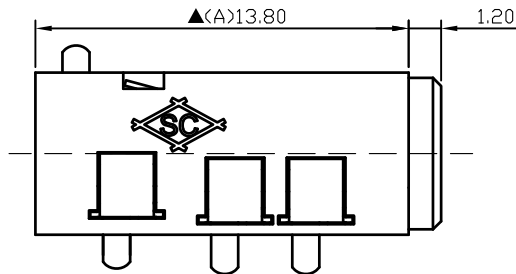

Pin Hole Layout
(Jack Bottom View)

5.	Break Terminal	0.2T Phosphor Bronze	1	Silver Plated
4.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
3.	Ring Spring	0.2T Phosphor Bronze	1	Silver Plated
2.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
1.	Housing	PA9T	1	Black Color
NO.	Description	Material	Q'TY	Finish

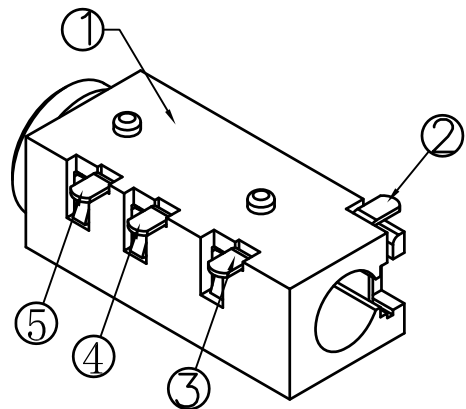

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.02.2020	王平華			

PART NAME : 3.5ø PHONE JACK

PART NUMBER: SCJ322P00LS0B00G

VERSION: 3.0

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Reference
僅供參考

RoHS&SVHC
Pb Free Process