


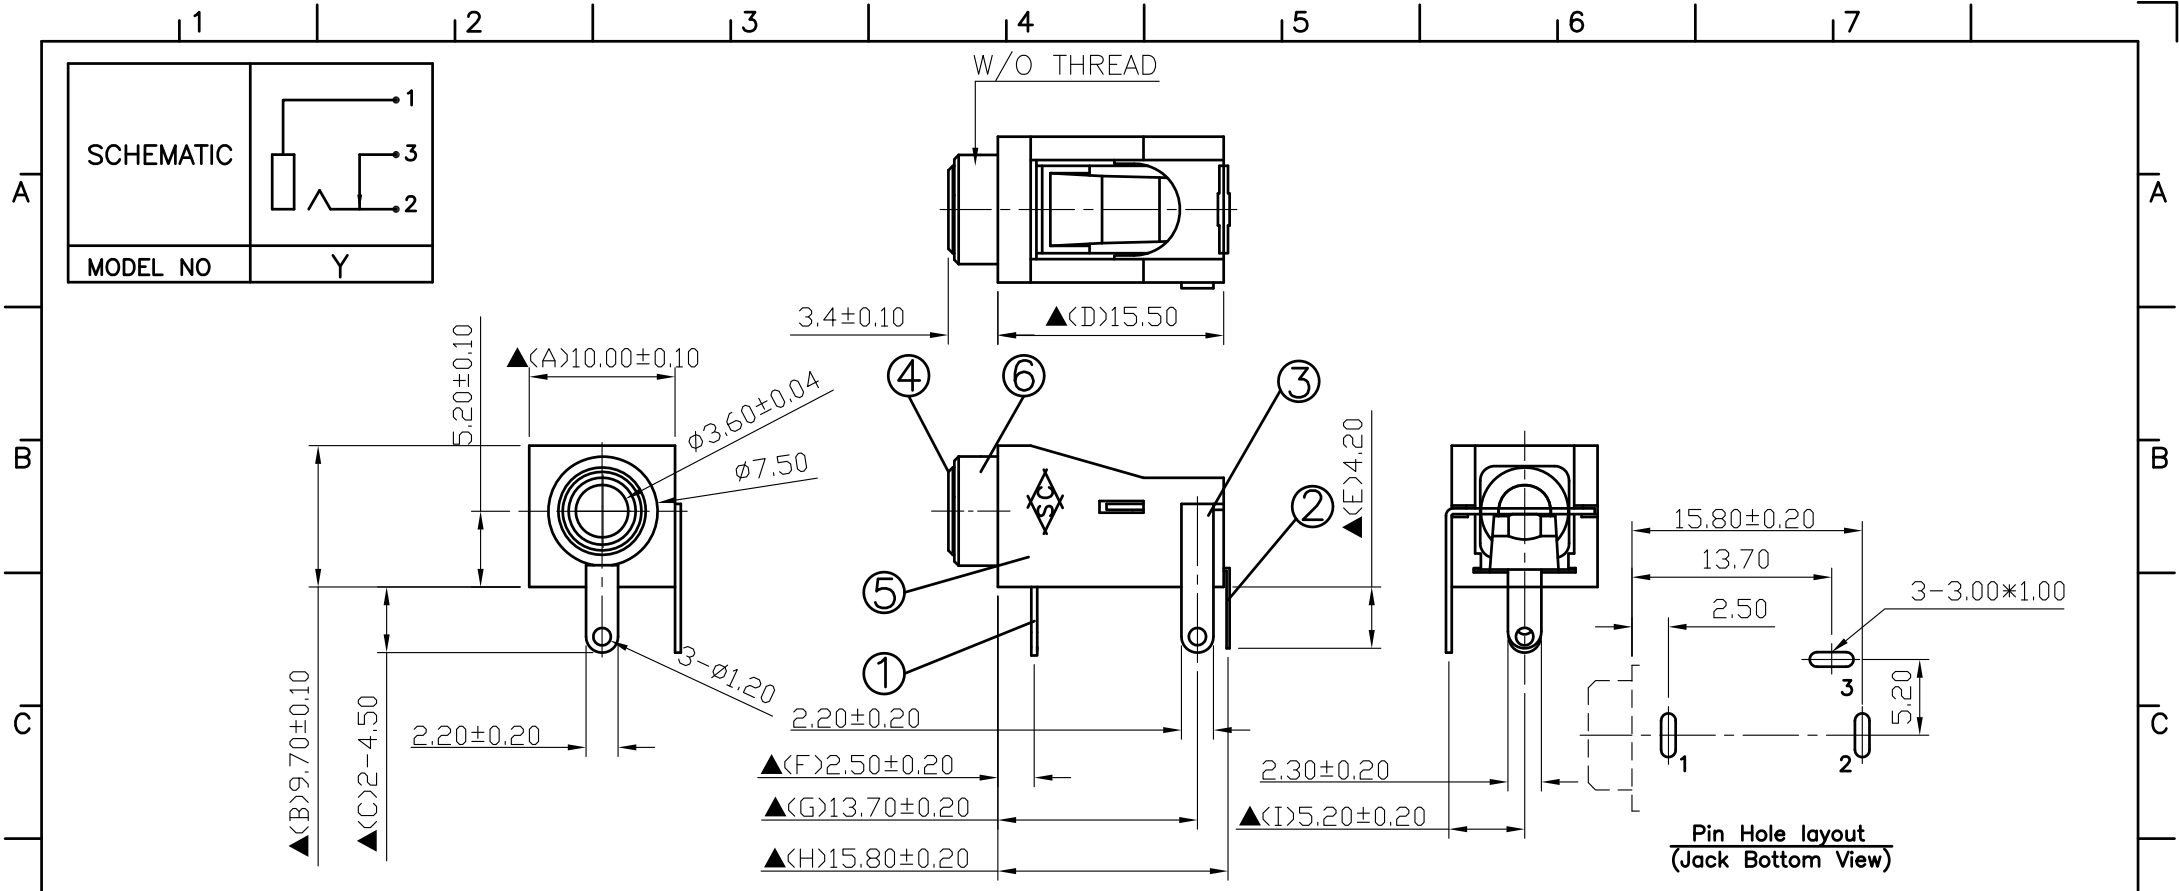

6.	Ringer	POM	1	Natural
5.	Housing	POM	1	Black Color
4.	Barrel(W/O Thread)	Low lead Brass Rod	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		09.03.2020	王平華			

PART NAME : 3.5φ PHONE JACK	PART NUMBER: SCJ324M2NYS0BB0L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:

- Contact Resistance : 30mΩ max
- Insulation Resistance : 100MΩ min. at DC 500V
- Dielectric Withstanding Voltage: AC 500V for one minute
- Remark: ▲: The Most Important Dimension

For Redference
僅供參攷

**RoHS&SVHC
Compliant**