

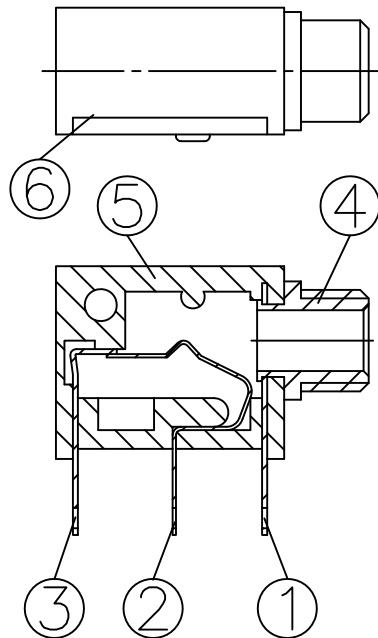
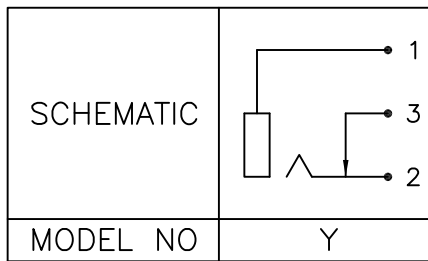
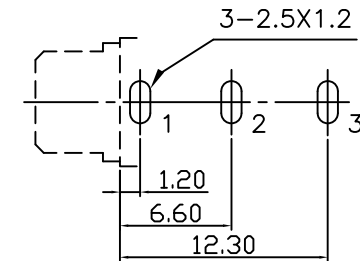


NUT

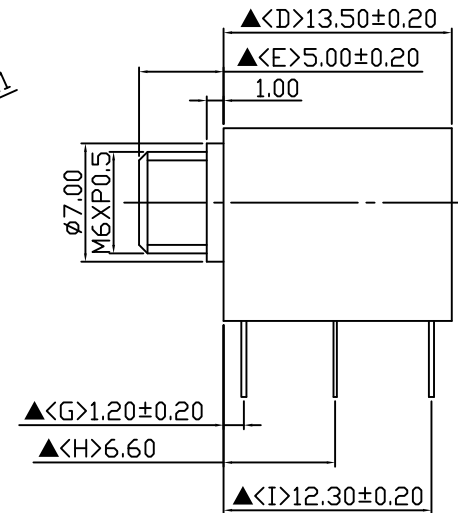

Pin Hole Layout
(Jack Bottom View)

7.	Nut	Low lead Brass Rod	1	Nickel Plated
6.	Cover	PC	1	Transparent
5.	Housing	POM	1	Black Color
4.	Barrel	Low lead Brass Rod	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.3T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

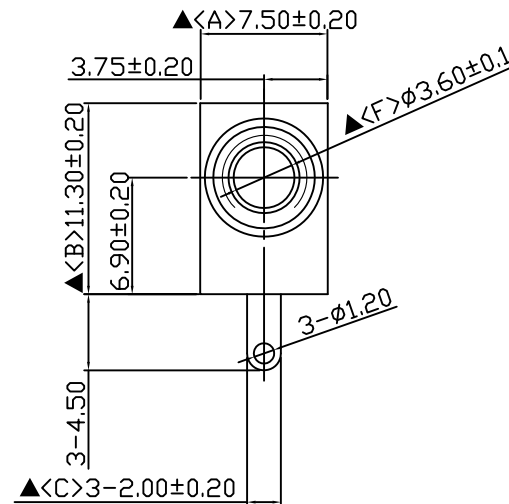

S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.08.2020	王平華			


PART NAME :3.5 ϕ PHONE JACK

PART NUMBER:SCJ328M1NYS1B00L

VERSION:1.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : $30m\Omega$ max
Insulation Resistance: $100M\Omega$ min. at DC 500V
Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參攷

RoHS&SVHC
Compliant