
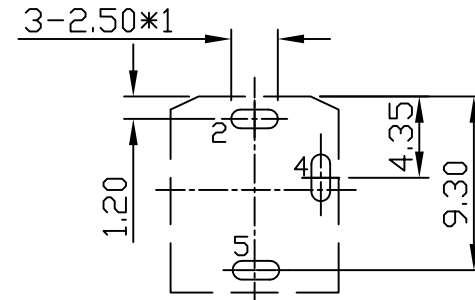
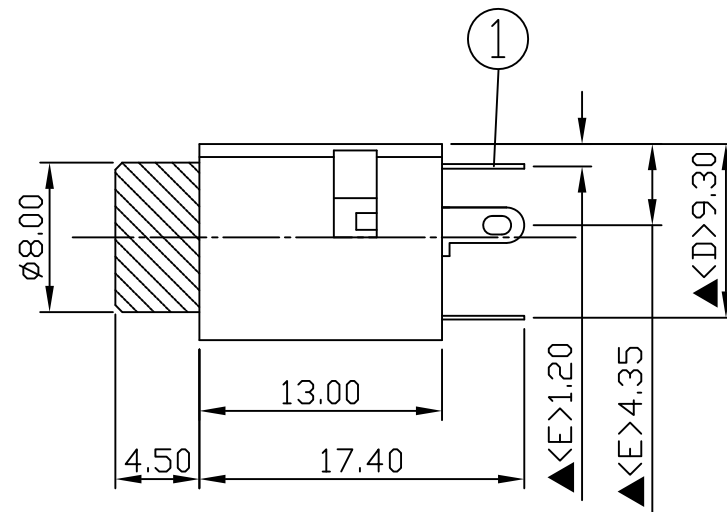
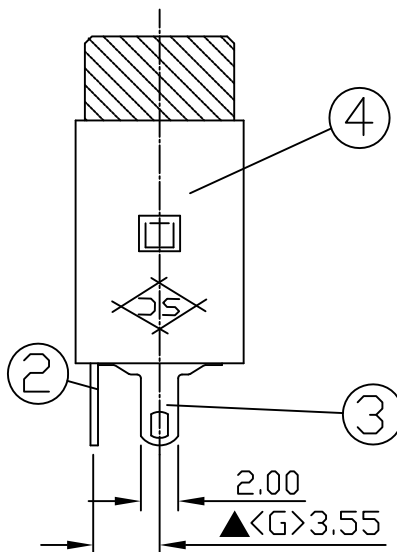
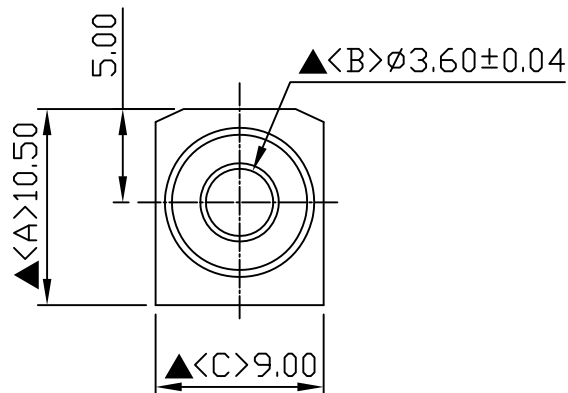


SCHEMATIC	
MODEL NO	Z

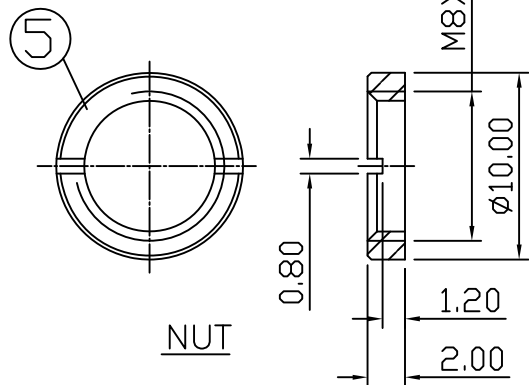

Pin Hole Layout
(Jack Bottom View)

5.	Nut	Low Lead Brass Rod	1	Nickel Plated
4.	Housing	PBT	1	Black Color
3.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
2.	Break Terminal	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	DATE				DWN	CHKD	APVD	MANAGER
	07.15.2021				王平華			

PART NAME :3.5ø PHONE JACK	PART NUMBER : SCJ330P10ZS3B00L	VERSION:2.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant