
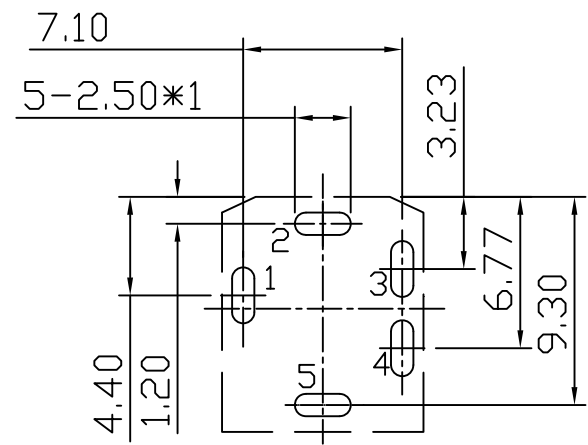
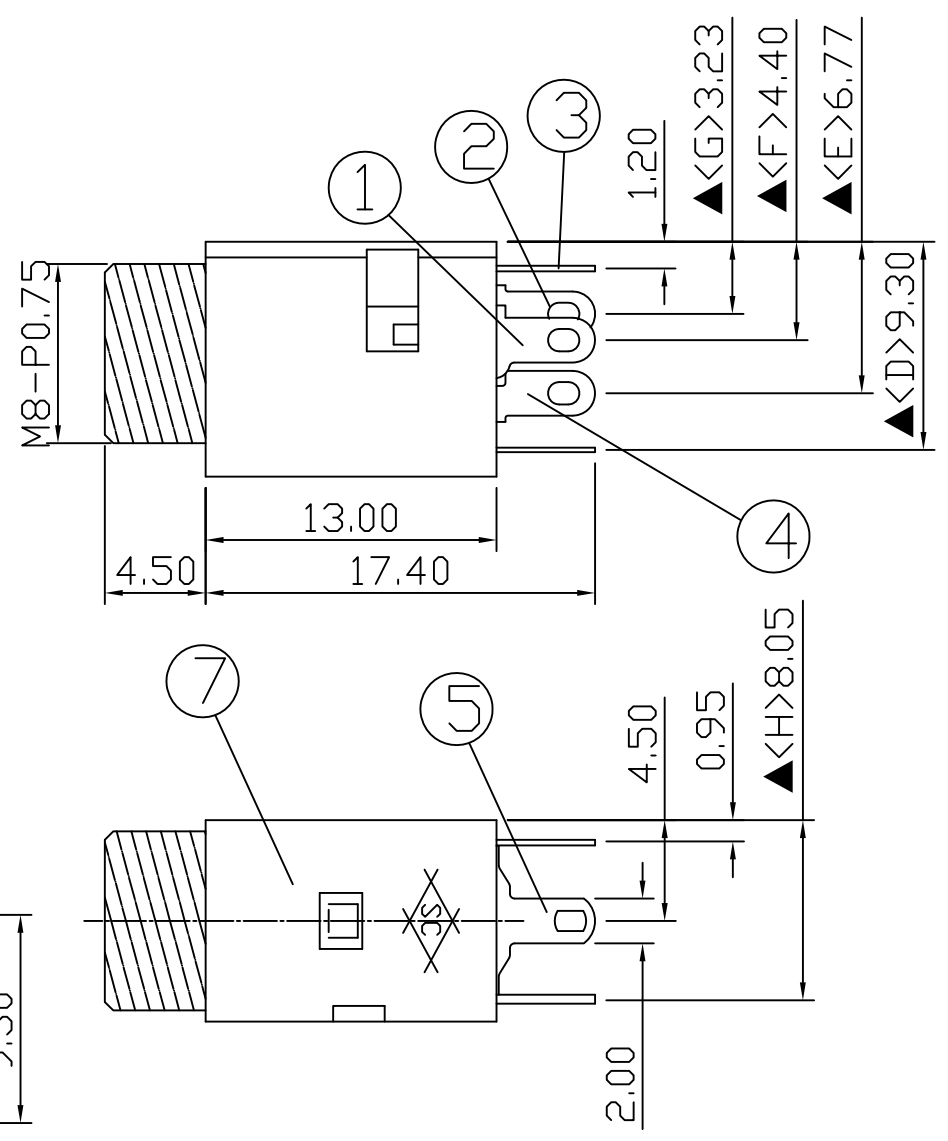
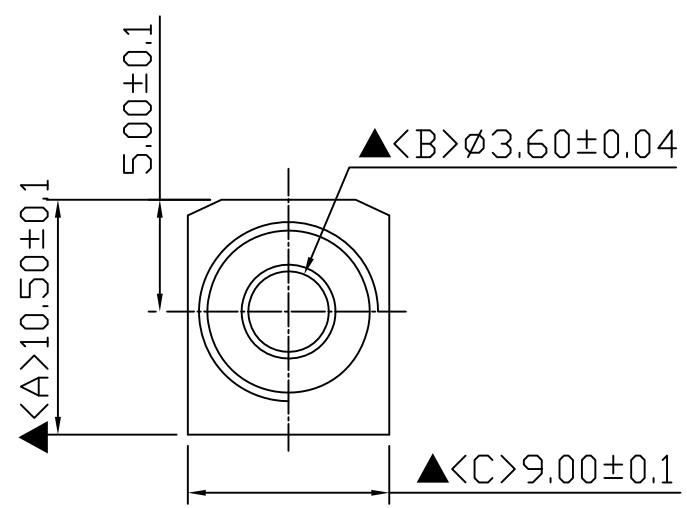
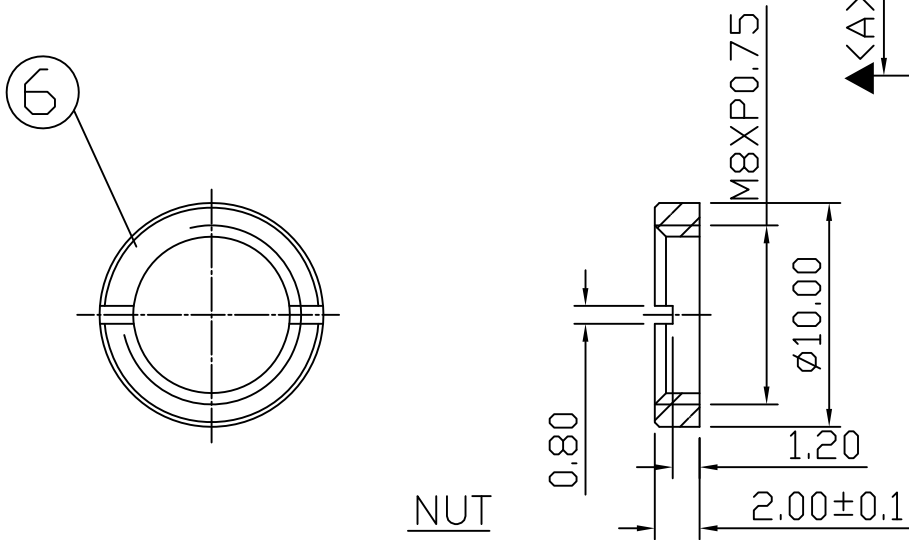
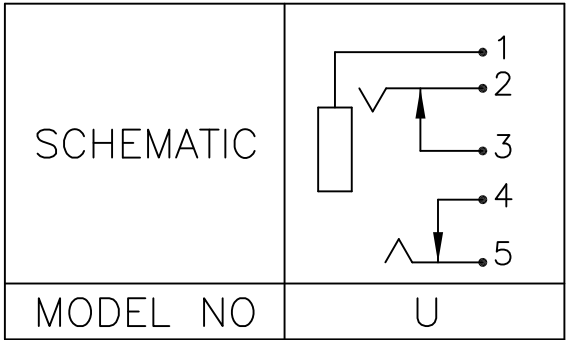


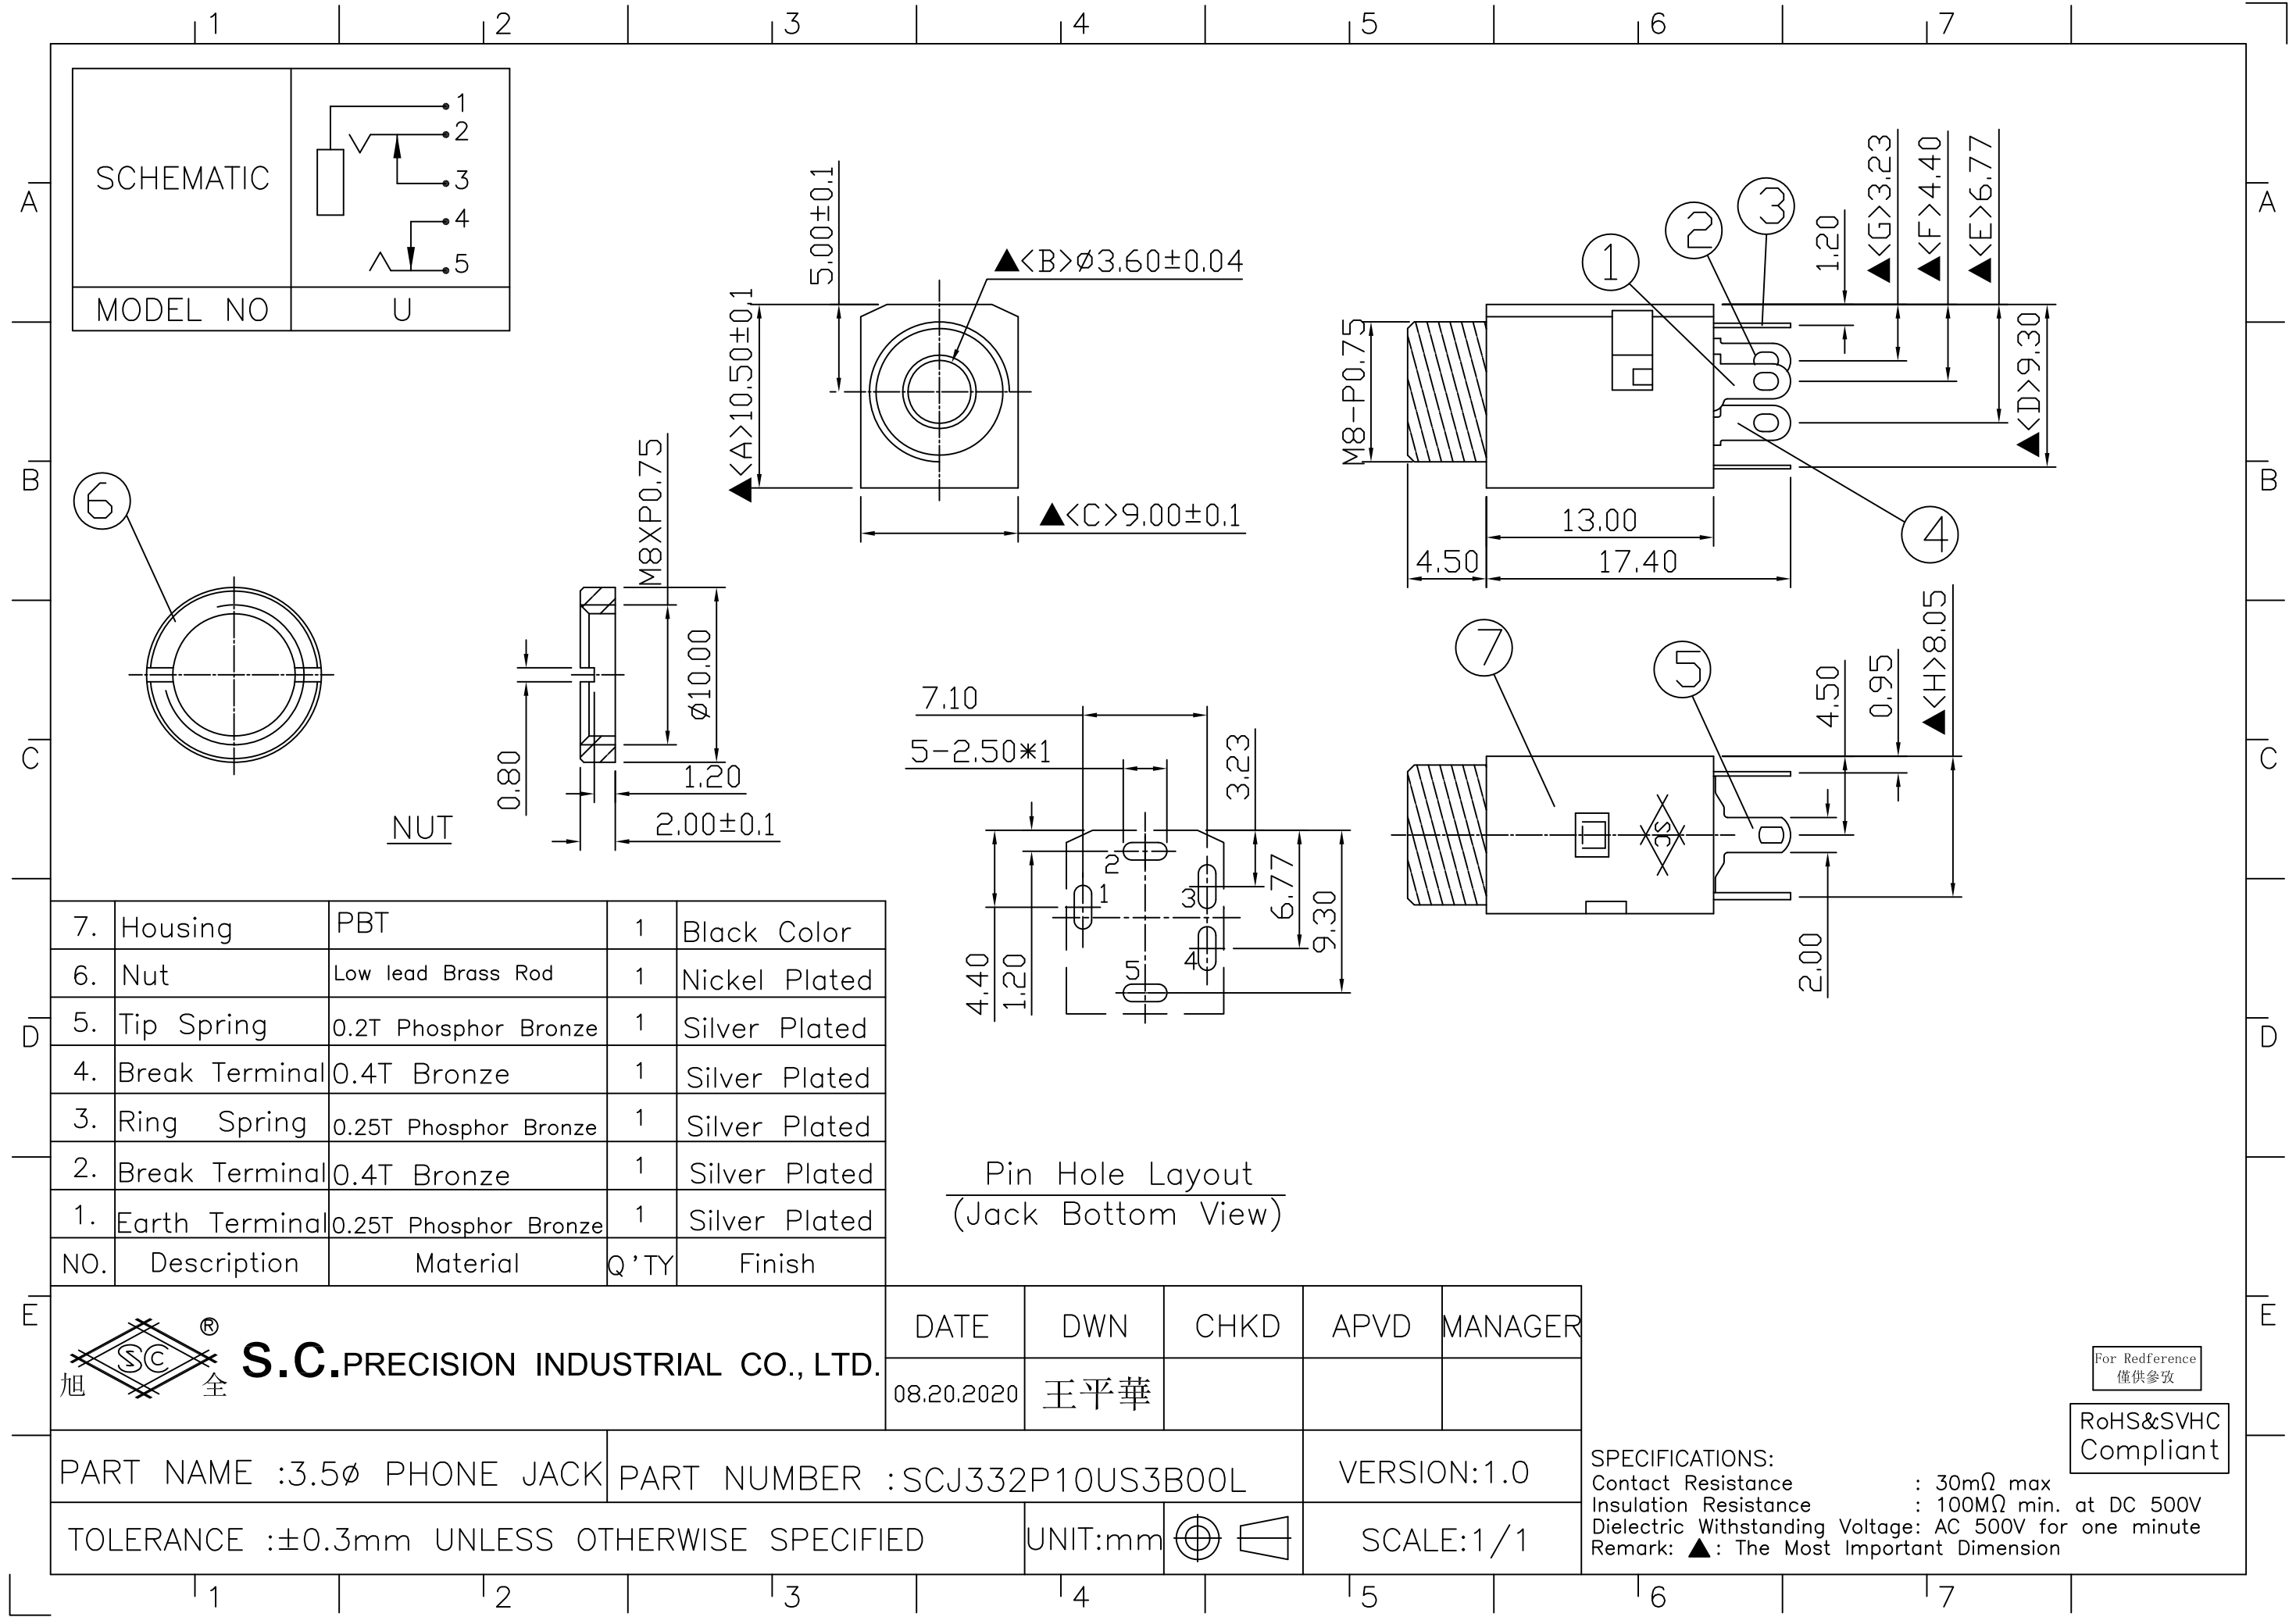

Pin Hole Layout
(Jack Bottom View)

7.	Housing	PBT	1	Black Color
6.	Nut	Low lead Brass Rod	1	Nickel Plated
5.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
4.	Break Terminal	0.4T Bronze	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Break Terminal	0.4T Bronze	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C.PRECISION INDUSTRIAL CO., LTD.		DATE	DWN	CHKD	APVD	MANAGER
		08.20.2020	王平華			

PART NAME :3.5φ PHONE JACK	PART NUMBER :SCJ332P10US3B00L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant