


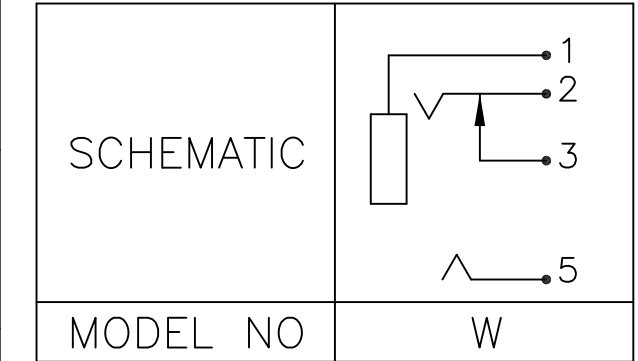
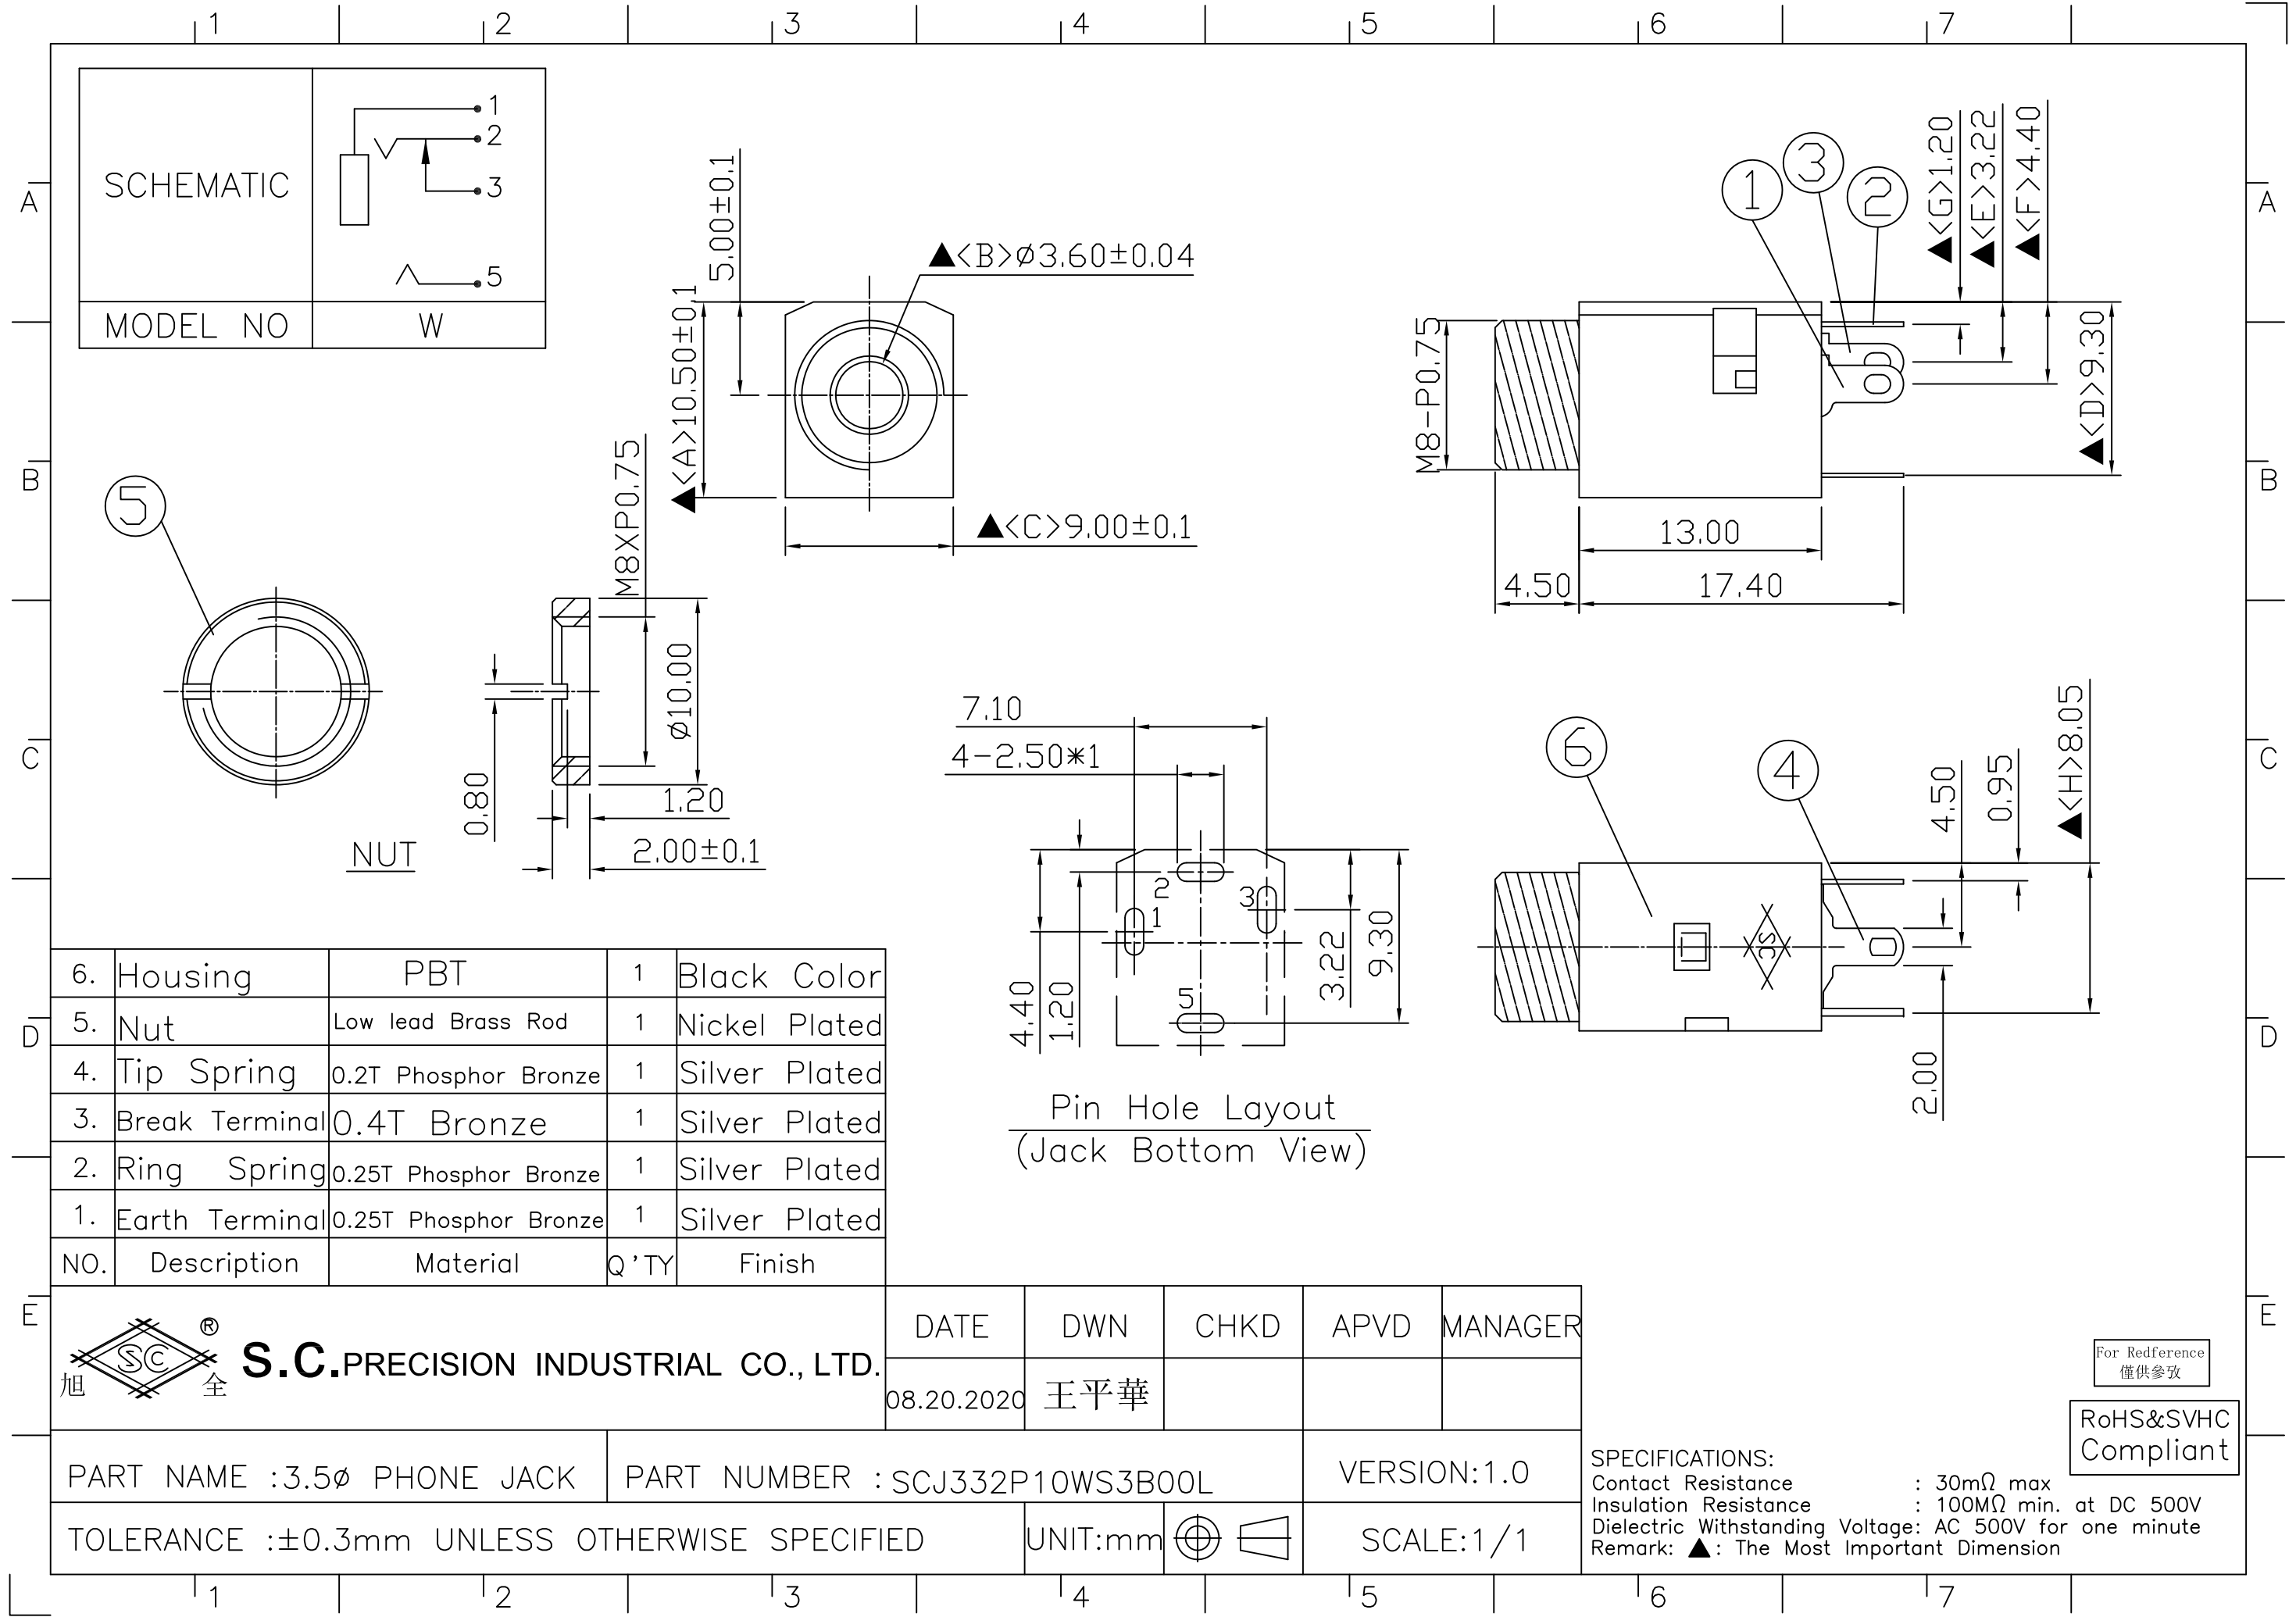



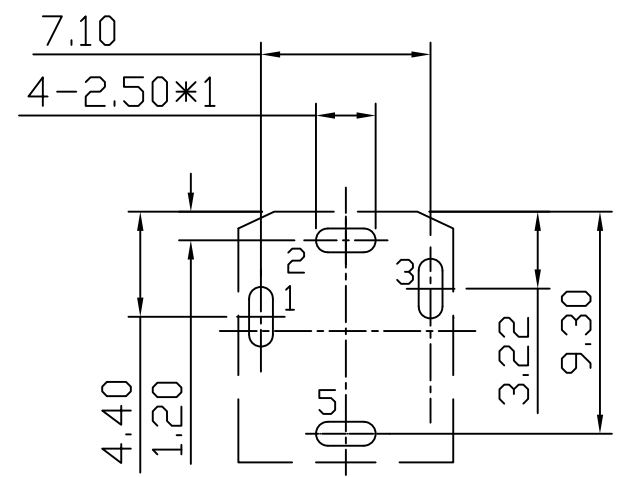



5

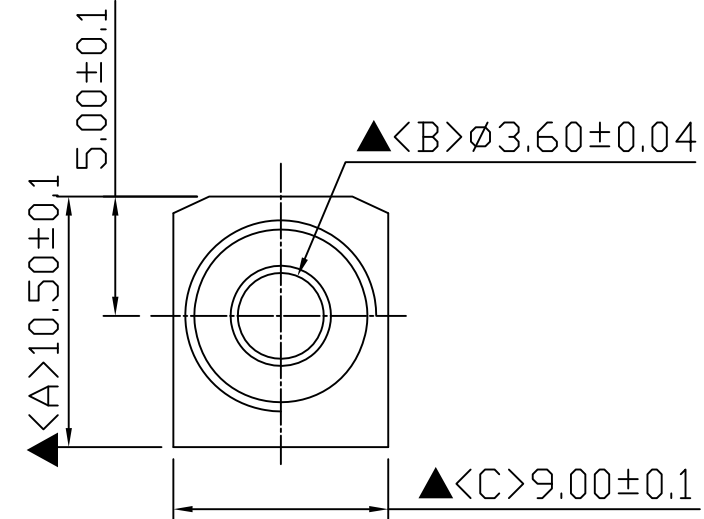

NUT

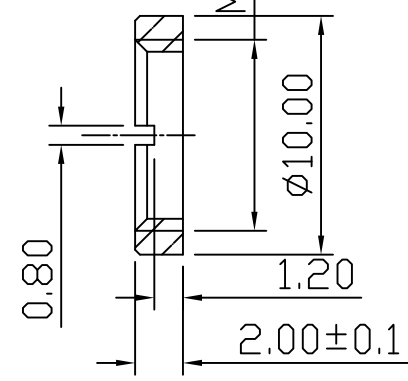


Pin Hole Layout
(Jack Bottom View)

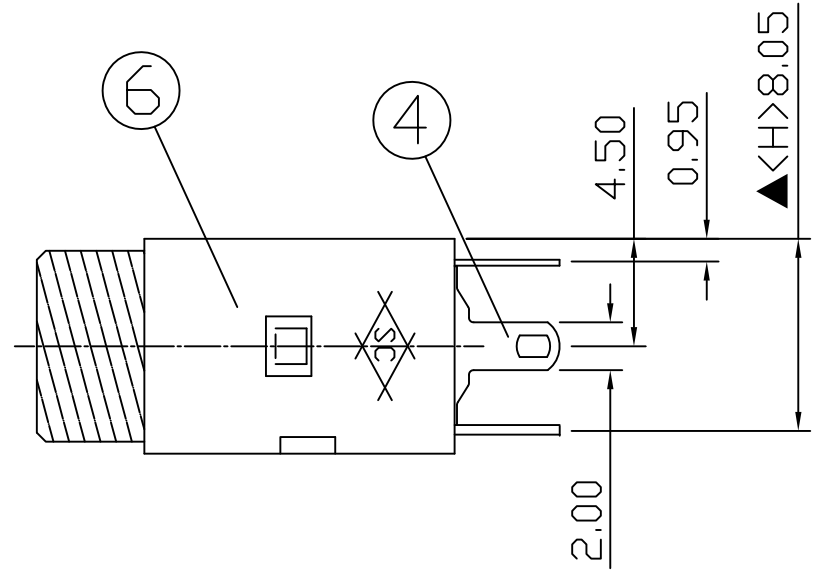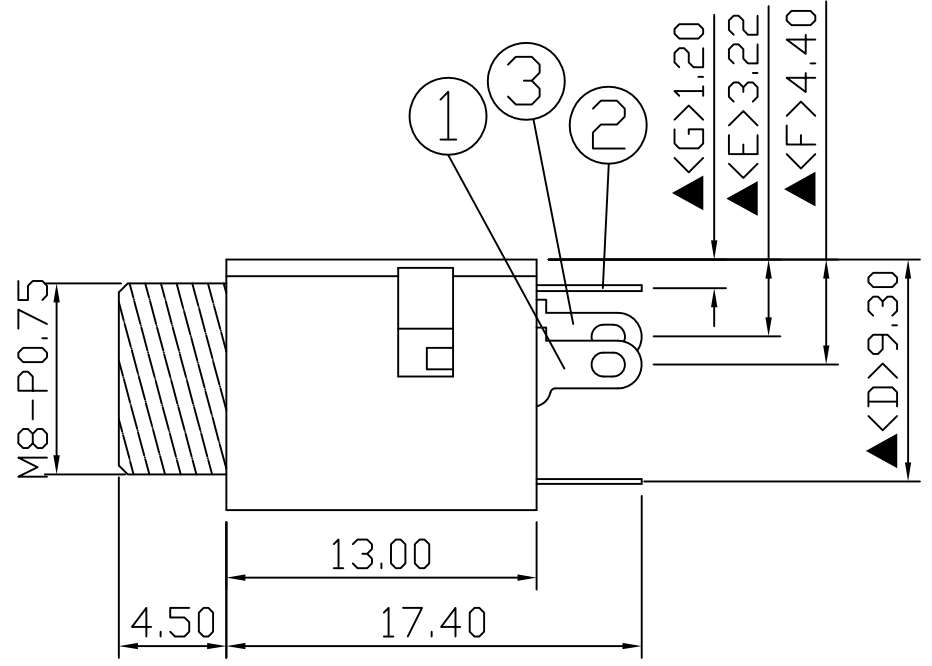

6.	Housing	PBT	1	Black Color
5.	Nut	Low lead Brass Rod	1	Nickel Plated
4.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
3.	Break Terminal	0.4T Bronze	1	Silver Plated
2.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 **S.C.PRECISION INDUSTRIAL CO., LTD.**

DATE	DWN	CHKD	APVD	MANAGER
08.20.2020	王平華			

PART NAME : 3.5ø PHONE JACK	PART NUMBER : SCJ332P10WS3B00L	VERSION: 1.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant