

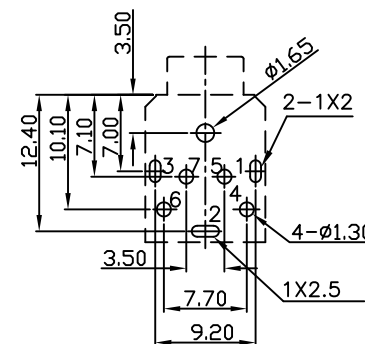

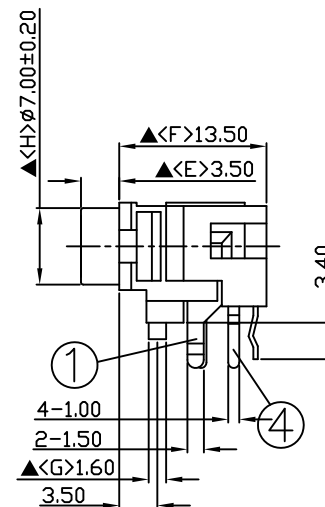


SCHEMATIC	
MODEL NO	C

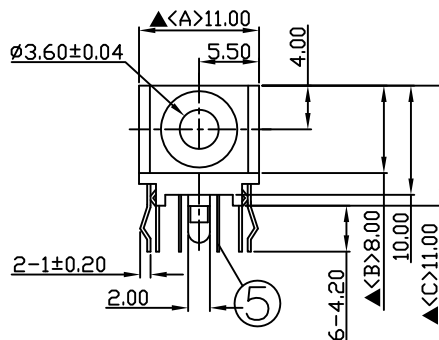

Pin Hole Layout
(Jack Bottom View)

8.	Insulator	POM	1	White Color
7.	Cover	POM	1	White Color
6.	Housing	PBT+15%	1	Black Color
5.	Separator Spring	0.2T Phosphor Bronze	2	Silver Plated
4.	Break Terminal	0.3T Brass	2	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Chip/Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
09.14.2021	王平華			

For Redference
僅供參考

RoHS&SVHC
Compliant


PART NAME : 3.5ø PHONE JACK

PART NUMBER: SCJ345P00CS0B00G

VERSION:4.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension