
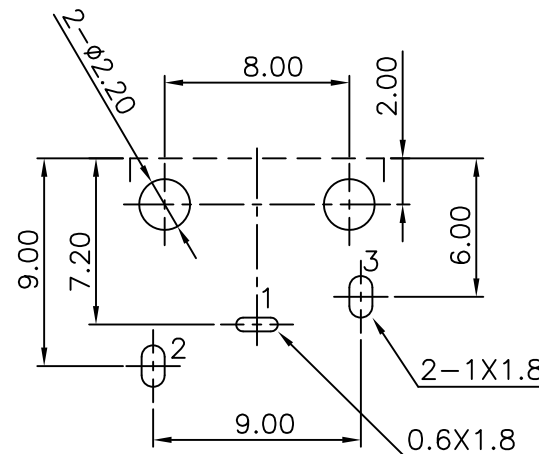
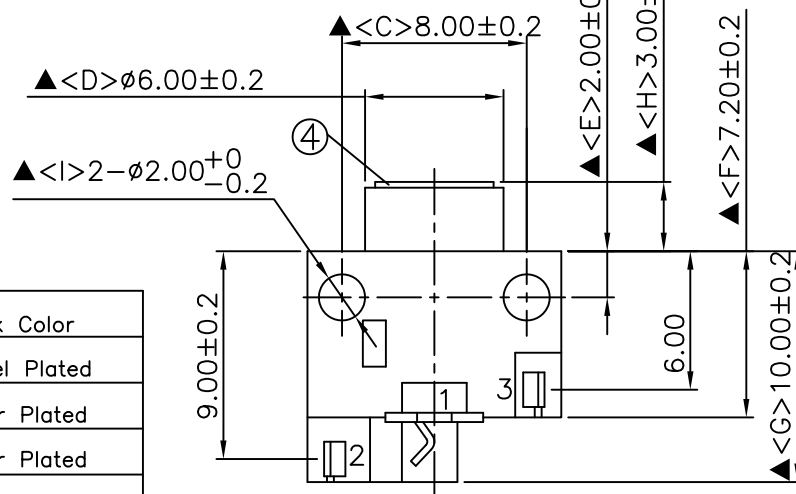
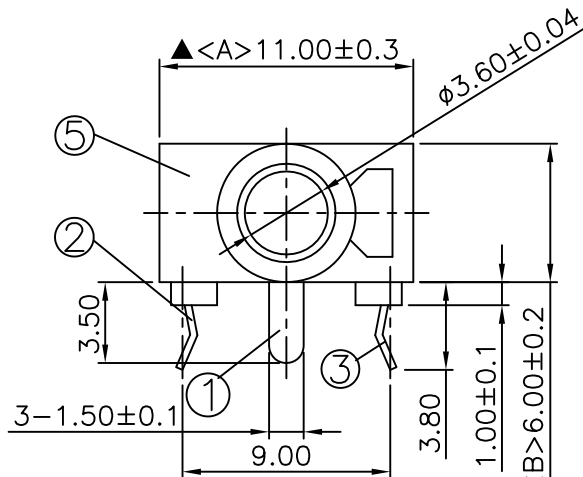


SCHEMATIC	
MODEL NO	X



Pin Hole Layout
(Jack Bottom View)

5.	Housing	PBT	1	Black Color
4.	Barrel	Low lead Brass Rod	1	Nickel Plated
3.	Ring Spring	0.3T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.4T Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

	DATE	DWN	CHKD	APVD	MANAGER
	09.16.2020	王平華			

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER: SCJ338R0NXSOB00L	VERSION: 1.0
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Reference
僅供參攷

RoHS&SVHC
Compliant