

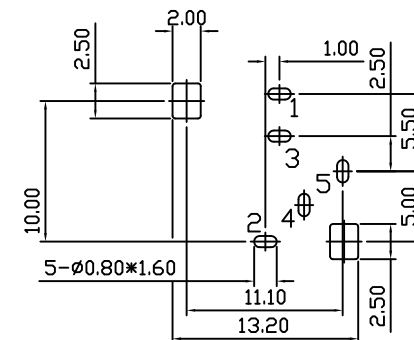
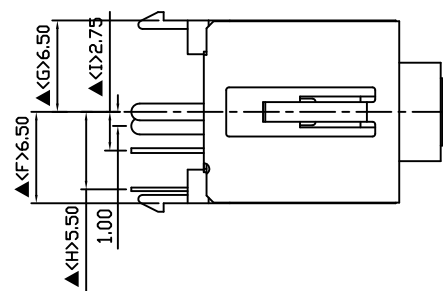

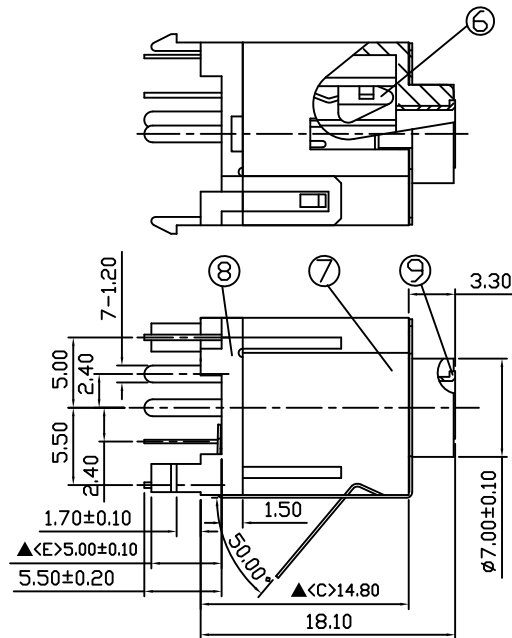




Pin Hole Layout  
(Jack Bottom View)

|     |                  |                       |      |                  |
|-----|------------------|-----------------------|------|------------------|
| 10. | Metal Plate      | 0.2T Phosphor Bronze  | 1    | Nickel Plated    |
| 9.  | Barrel           | Low lead Brass Rod    | 1    | Nickel Plated    |
| 8.  | Back Cover       | PBT                   | 1    | 577C Green Color |
| 7.  | Housing          | PBT                   | 1    | 577C Green Color |
| 6.  | Insulator        | POM                   | 1    | White Color      |
| 5.  | Break Terminal   | 0.25T Phosphor Bronze | 1    | Silver Plated    |
| 4.  | Separator Spring | 0.3T Brass            | 1    | Silver Plated    |
| 3.  | Ring Spring      | 0.25T Phosphor Bronze | 1    | Silver Plated    |
| 2.  | Tip Spring       | 0.35T Phosphor Bronze | 1    | Silver Plated    |
| 1.  | Earth Spring     | 0.25T Phosphor Bronze | 1    | Silver Plated    |
| NO. | Description      | Material              | Q'TY | Finish           |



**S.C. PRECISION INDUSTRIAL CO., LTD.**

| DATE       | DWN | CHKD | APVD | MANAGER |
|------------|-----|------|------|---------|
| 08.18.2020 | 王平華 |      |      |         |

PART NAME : 3.5Ø PHONE JACK

PART NUMBER: SCJ339R0NES0G04L

VERSION:1.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:/

**SPECIFICATIONS:**

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstand Voltage : AC 500V for one minute  
 Remark: ▲: The Most Important Dimension

For Reference  
僅供參考

**RoHS&SVHC  
Compliant**