
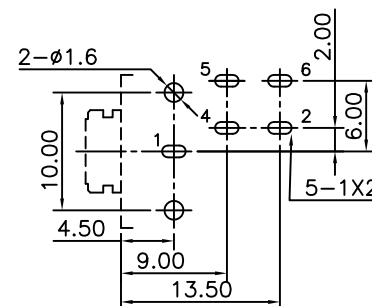
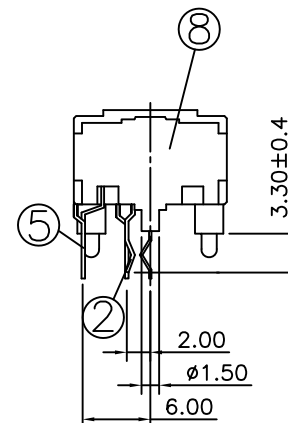
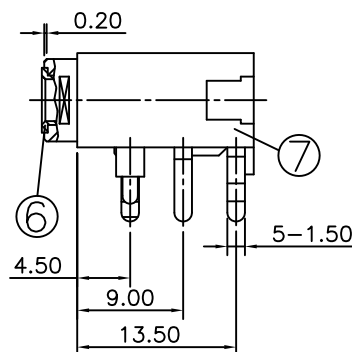
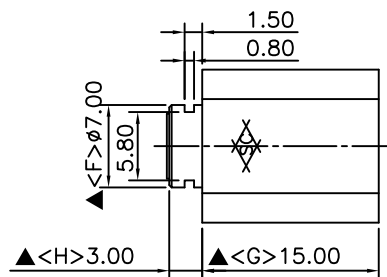
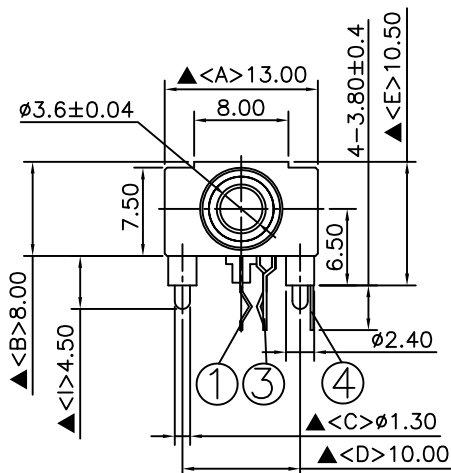





Pin Hole Layout
(Jack Bottom View)

8.	Cover	POM	1	White Color
7.	Housing	PBT+15%	1	Black Color
6.	Barrel	Low Lead Brass Rod	1	Nickel Plated
5.	Make Terminal	0.20T Phosphor Bronze	1	Silver Plated
4.	Separator Spring	0.25T Phosphor Bronze	1	Silver Plated
3.	Break Terminal	0.30T Brass	1	Silver Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q TY	Finish

 **S.C. PRECISION INDUSTRIAL CO., LTD.**

DATE	DWN	CHKD	APVD	MANAGER
12.14.2021	王平華			


PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER: SCJ348R0NES0B00L

VERSION: 1.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant