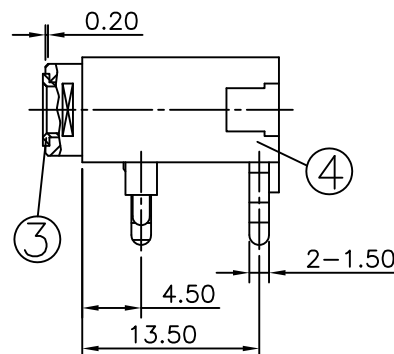
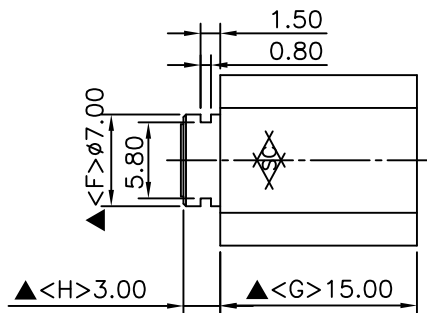
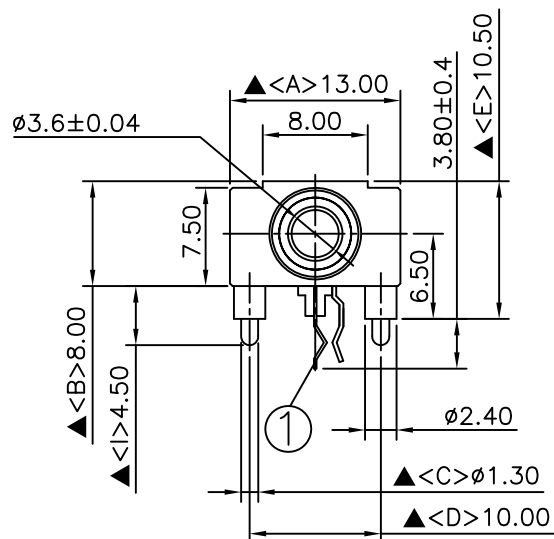




Pin Hole Layout
(Jack Bottom View)

5.	Cover	POM	1	White Color
4.	Housing	PBT+15%	1	Black Color
3.	Barrel	Low Lead Brass Rod	1	Nickel Plated
2.	Tip Spring	0.3T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	12.14.2021	王平華			

PART NAME : 3.5 ϕ PHONE JACK	PART NUMBER: SCJ348R0NHS0B00L	VERSION: 1.0
TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED	UNIT: mm 	SCALE: 1/1

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: $\blacktriangle$: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant