




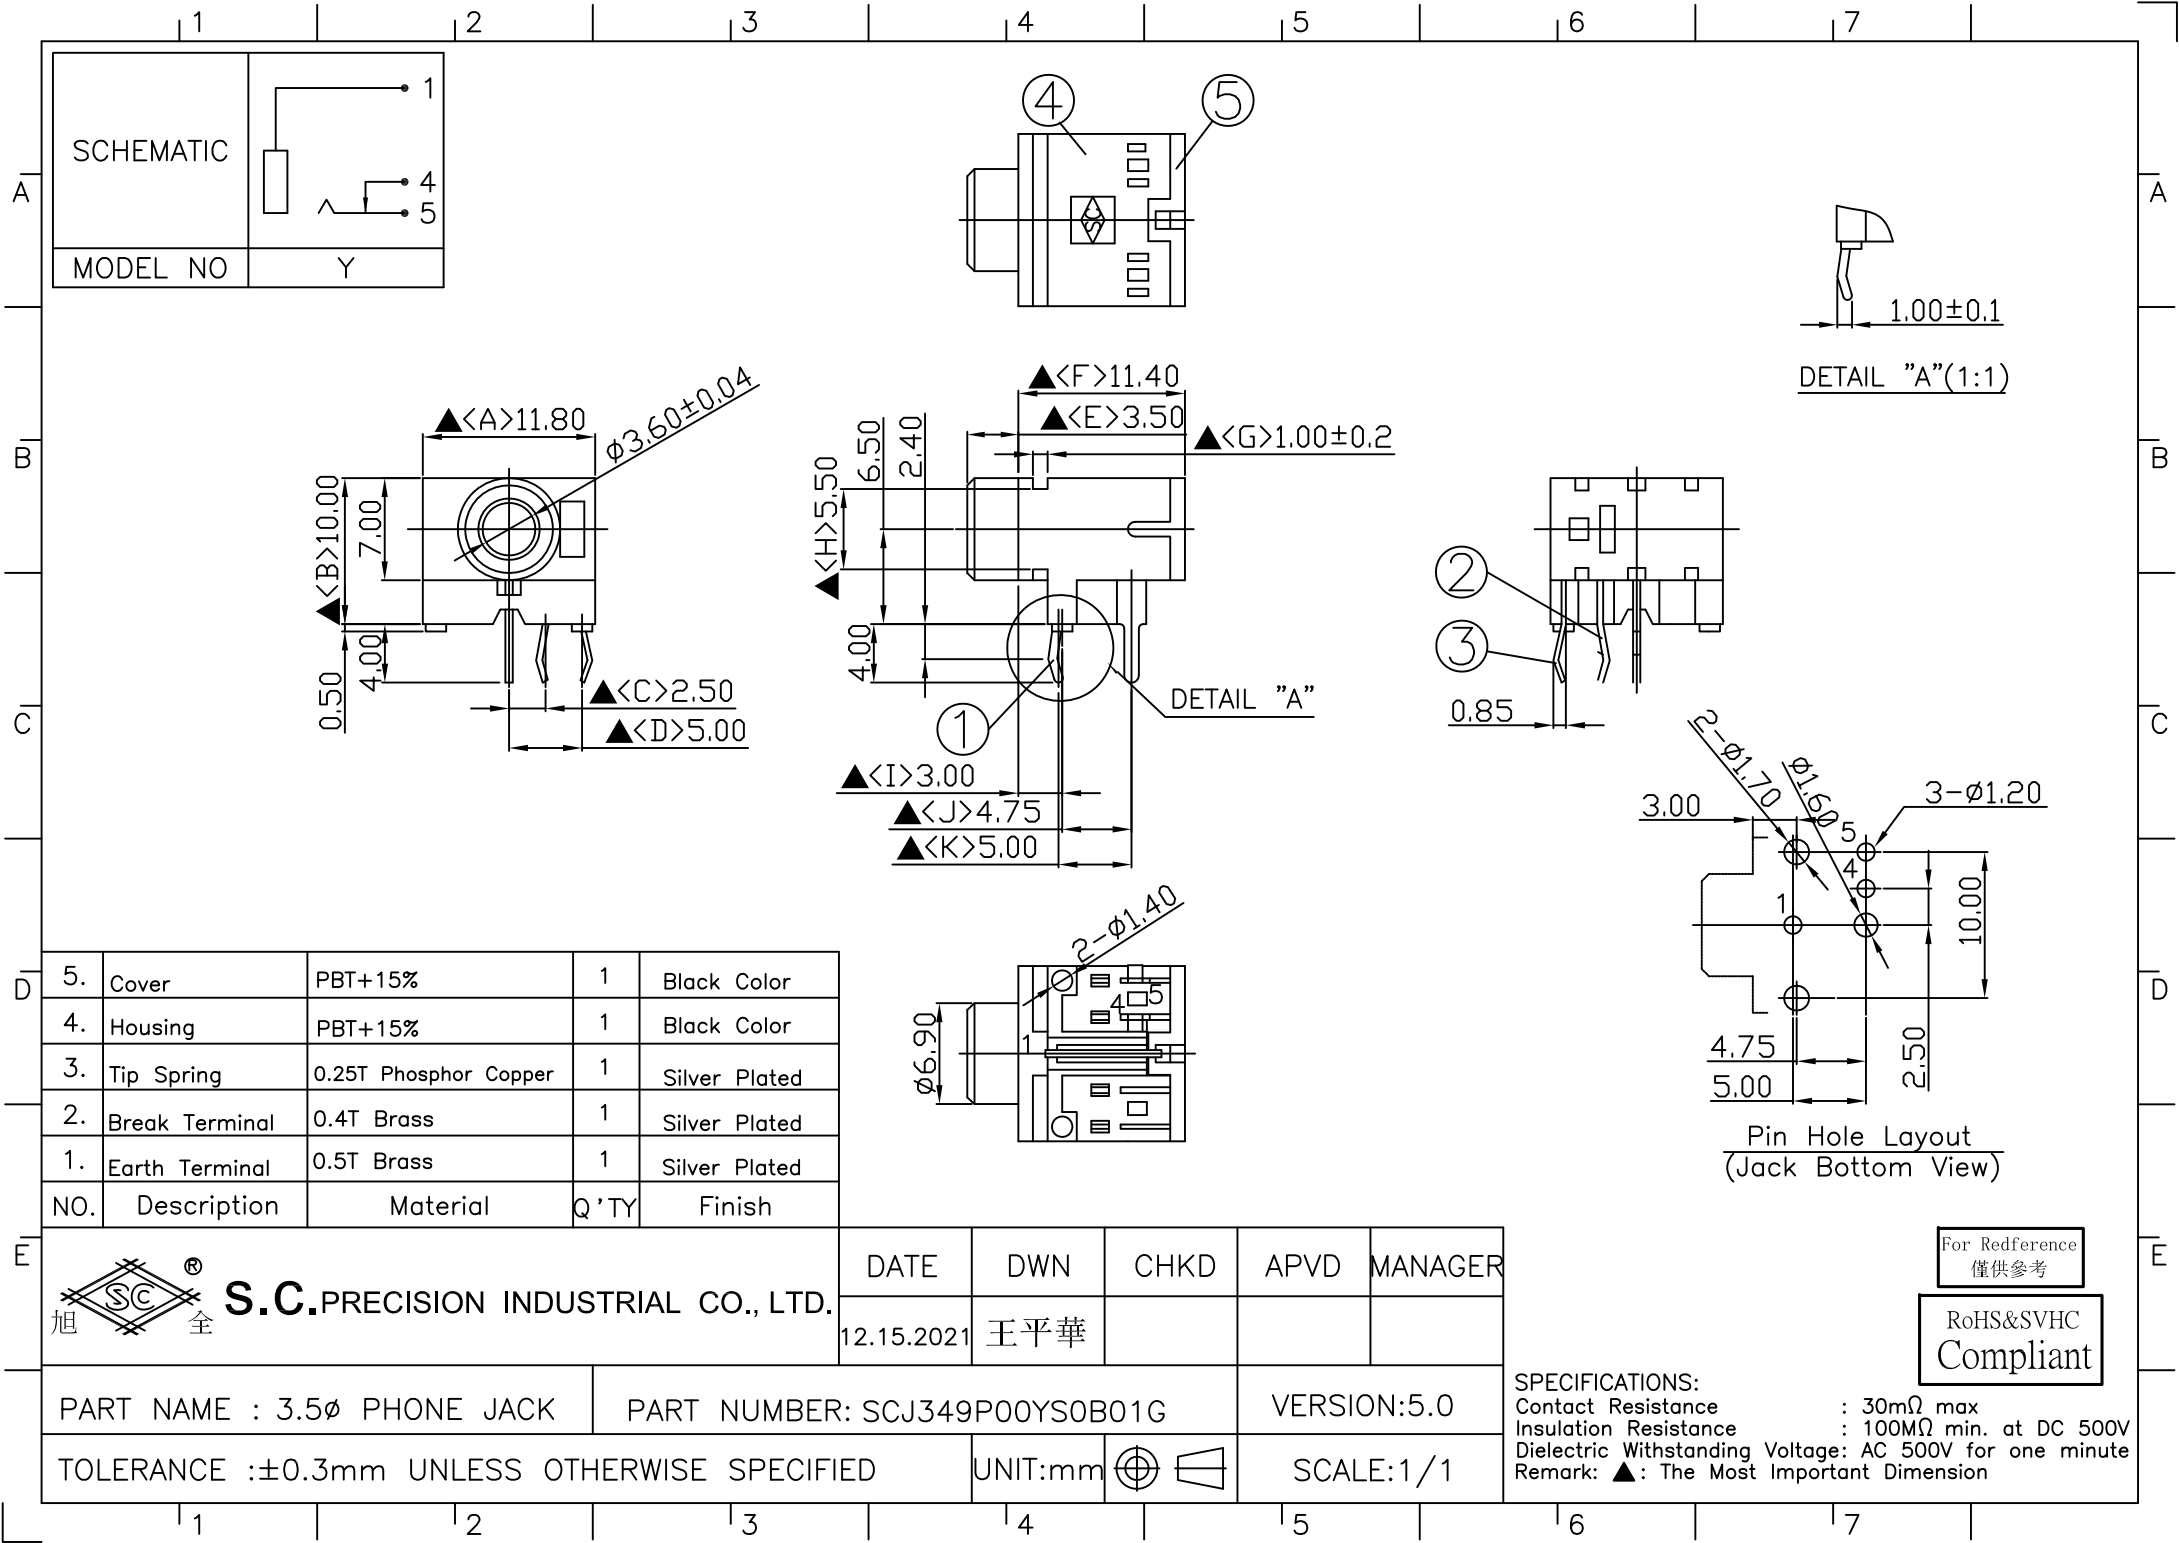


SCHEMATIC




MODEL NO



Y

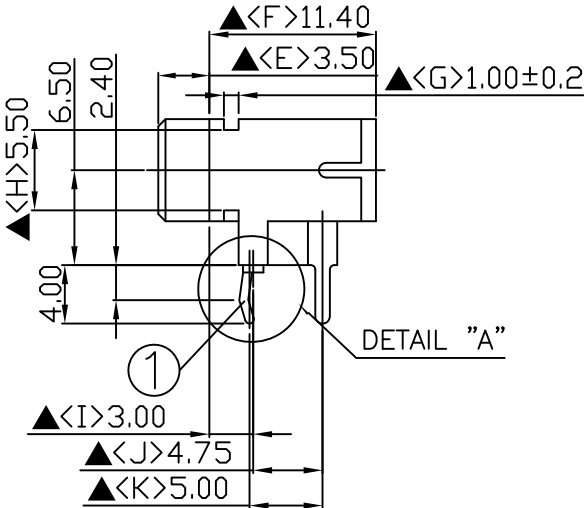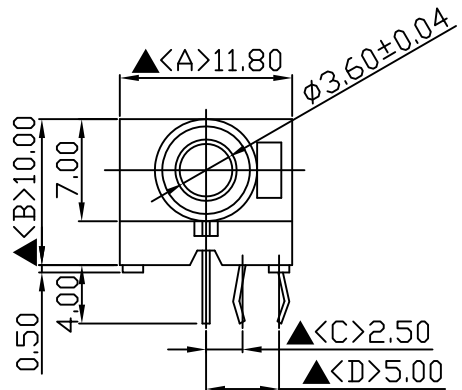

DETAIL "A"



DETAIL "A"(1:1)

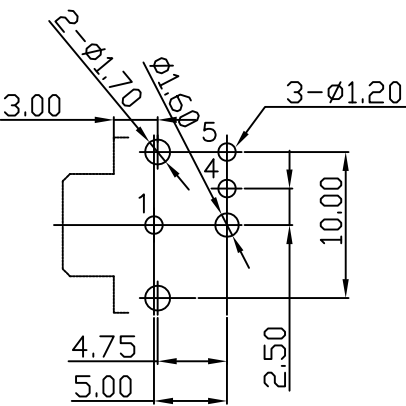

Pin Hole Layout
(Jack Bottom View)

5.	Cover	PBT+15%	1	Black Color
4.	Housing	PBT+15%	1	Black Color
3.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Break Terminal	0.4T Brass	1	Silver Plated
1.	Earth Terminal	0.5T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C.PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
12.15.2021	王平華			

PART NAME : 3.5φ PHONE JACK PART NUMBER: SCJ349P00YS0B01G VERSION:5.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED UNIT:mm SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant