
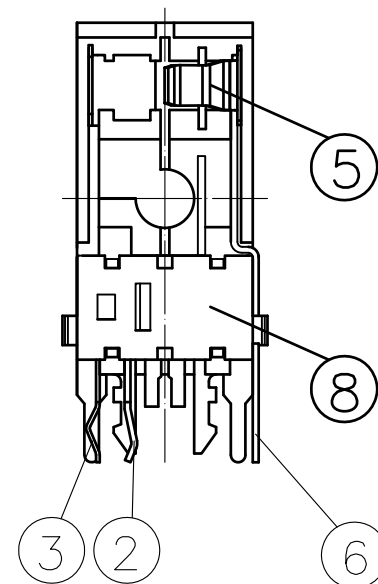
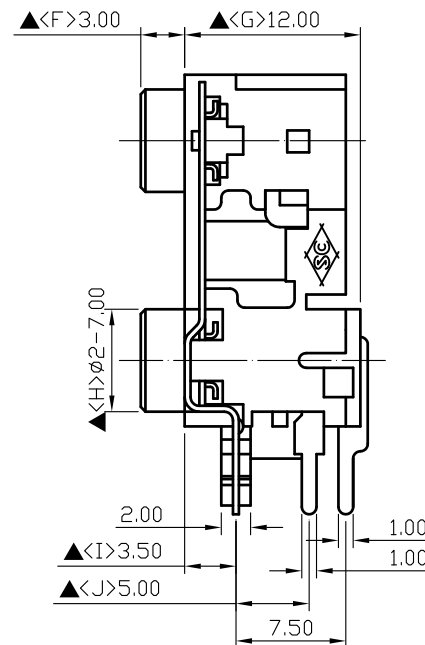
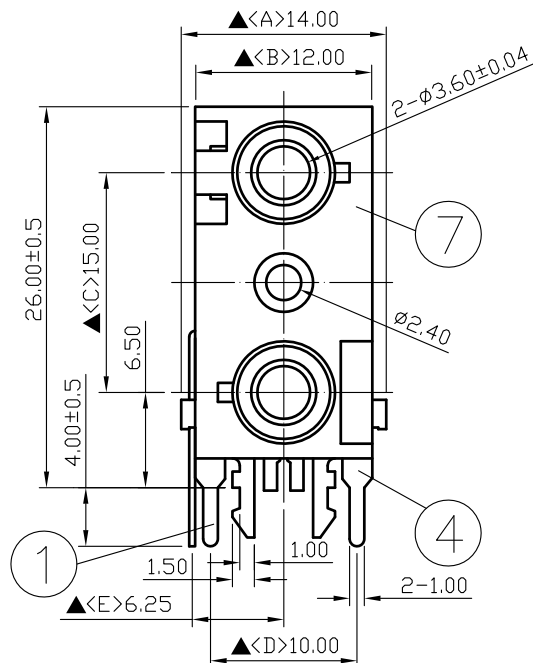


Pin Hole Layout
(Jack Bottom View)

8.	Cover	PBT+15%	1	Black	Color
7.	Housing	PBT	1	Black	Color
6.	Tip Lead(TOP)	0.4T Brass	1	Silver	Plated
5.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver	Plated
4.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver	Plated
3.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver	Plated
2.	Break Terminal(DOWN)	0.4T Brass	1	Silver	Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver	Plated
NO.	Description	Material	Q'TY	Finish	



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.03.2024	王放策			

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER : SCJ351P00YS0B00G

VERSION: 7.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: Δ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant