

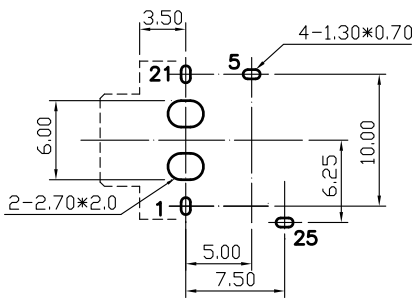
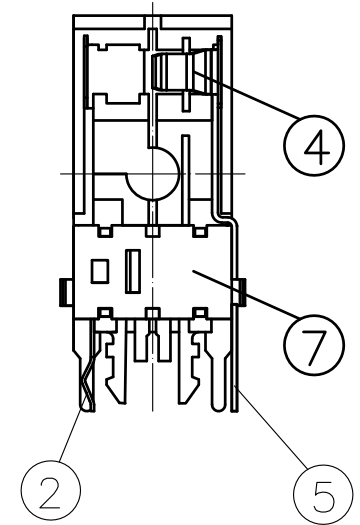
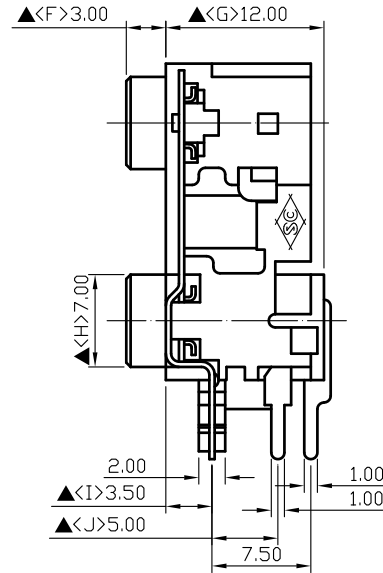


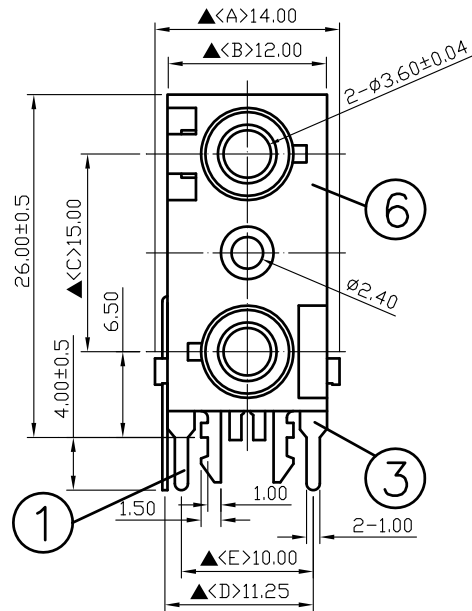

Pin Hole Layout
(Jack Bottom View)

7.	Cover	PBT+15%	1	Black Color
6.	Housing	PBT	1	Black Color
5.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
4.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
3.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
2.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
06.03.2024	王放策			

PART NAME : 3.5φ PHONE JACK	PART NUMBER : SCJ351P00ZS0B00G	VERSION: 7.0
-----------------------------	--------------------------------	--------------

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT: mm	SCALE: 1/1
---	----------	------------

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant