
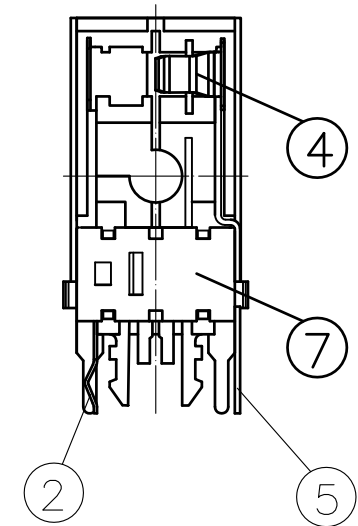
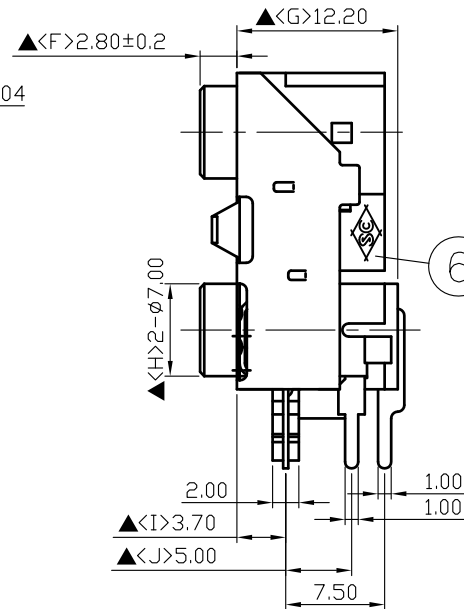
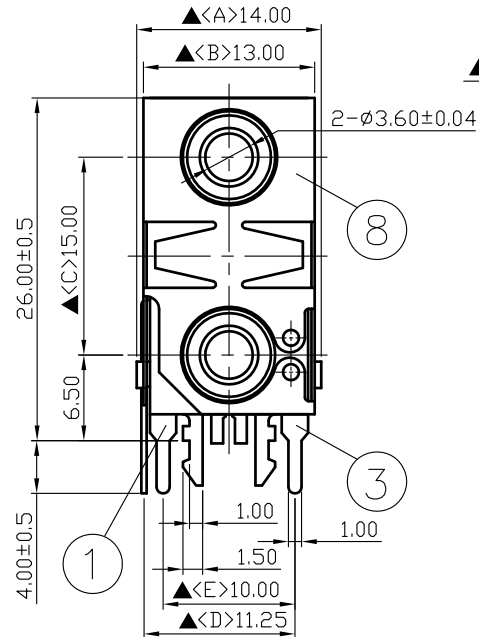


Pin Hole Layout
(Jack Bottom View)

8.	Metal Shell	0.2T Phosphor Copper	1	Silver Plated
7.	Cover	PBT+15%	1	Black Color
6.	Housing	PBT	1	Black Color
5.	Tip Lead(TOP)	0.4T Brass	1	Silver Plated
4.	Tip Spring(TOP)	0.25T Phosphor Copper	1	Silver Plated
3.	Earth Terminal(TOP)	0.4T Phosphor Copper	1	Silver Plated
2.	Tip Spring(DOWN)	0.25T Phosphor Copper	1	Silver Plated
1.	Earth Terminal(DOWN)	0.4T Phosphor Copper	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

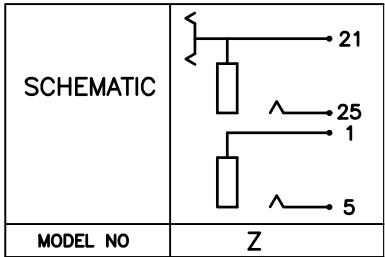

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE

DWN

CHKD

APVD

MANAGER

06.03.2024

王放策

PART NAME : 3.5 ϕ PHONE JACK

PART NUMBER : SCJ351P00ZSOBNSG

VERSION: 7.0

TOLERANCE : $\pm 0.3\text{mm}$ UNLESS OTHERWISE SPECIFIED

UNIT: mm



SCALE: 1/1

SPECIFICATIONS:

Contact Resistance : $30\text{m}\Omega$ max
Insulation Resistance : $100\text{M}\Omega$ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: Δ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant