

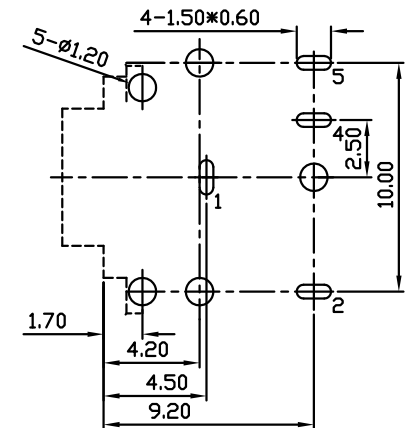
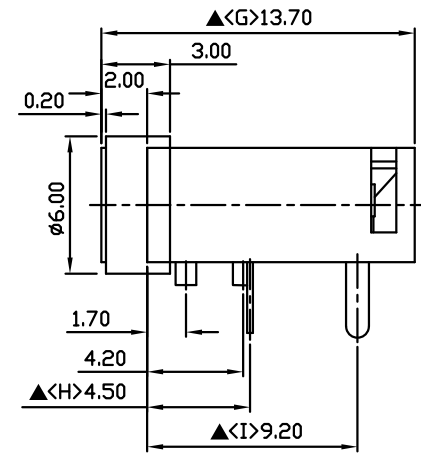


SCHEMATIC	
MODEL NO	V

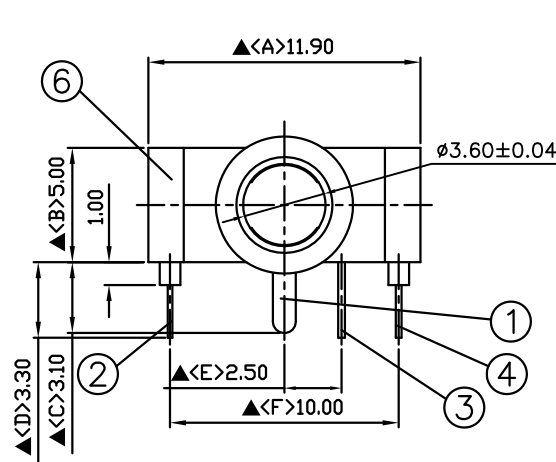

Pin Hole Layout
(Jack Bottom View)

6	Housing	PBT+15%	1	Black Color
5	Barrel	Low Lead Brass Rod	1	Nickel Plated
4	Tip Spring	0.25T YcuT	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.2T YcuT	1	Silver Plated
1	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

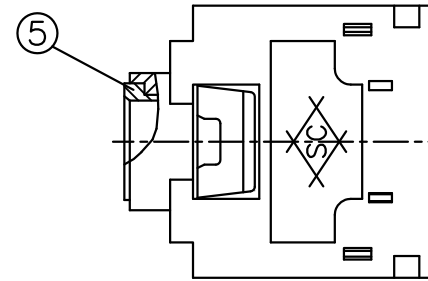

S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.22.2021	王平華			

PART NAME : 3.5Ø PHONE JACK

PART NUMBER: SCJ355R0NVS0B00L

VERSION:1.0

TOLERANCE:±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance :30mΩ max
Insulation Resistance :100MΩ min.at DC500V
Dielectric Withstand Voltage:AC 500V for one minute
Remark:▲:The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant