

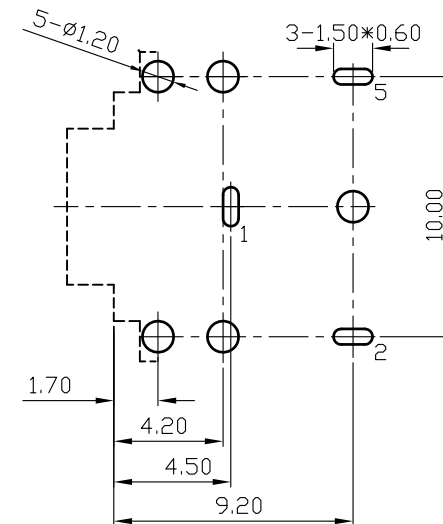
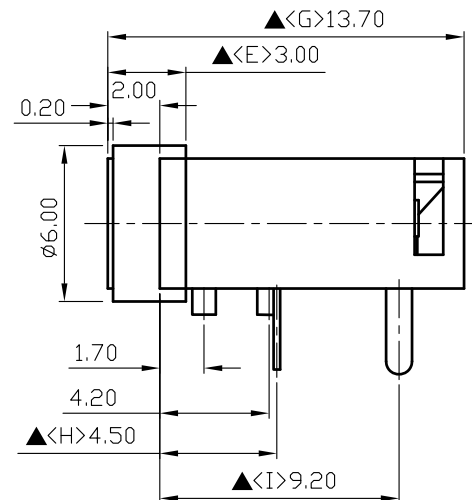
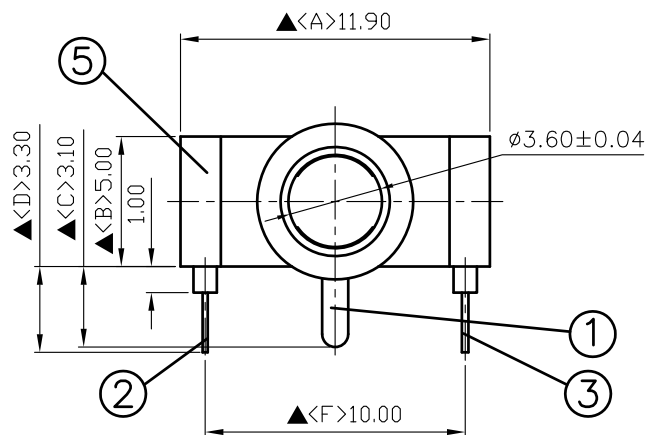


SCHEMATIC	
MODEL NO	X

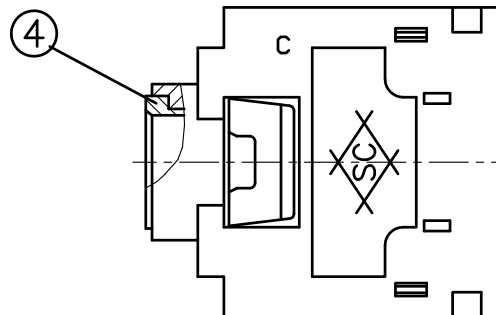

Pin Hole Layout
(Jack Bottom View)

5.	Housing	PBT+15%	1	Black Color
4.	Barrel	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Spring	0.25T Phosphor Copper	1	Silver Plated
2.	Ring Spring	0.2T Phosphor Copper	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

 S.C. PRECISION INDUSTRIAL CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	11.22.2021	王平華			

PART NAME: 3.5ø PHONE JACK	PART NUMBER: SCJ355RONXS0B00L	VERSION:3.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm 	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstand Voltage : AC 500V for one minute
 Remark: ▲ : The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant