
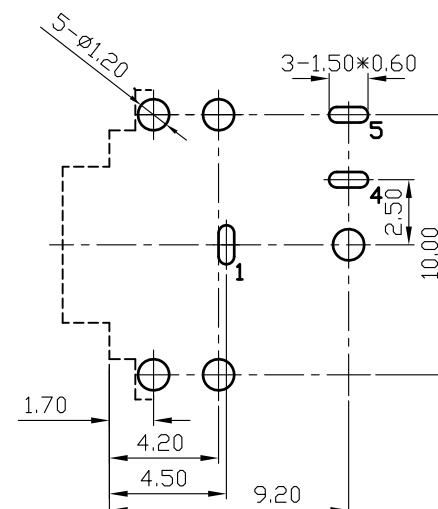
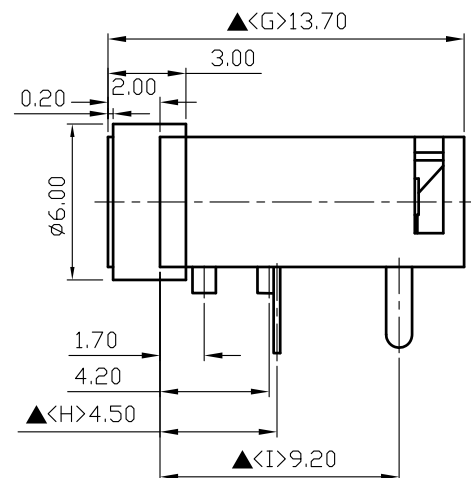
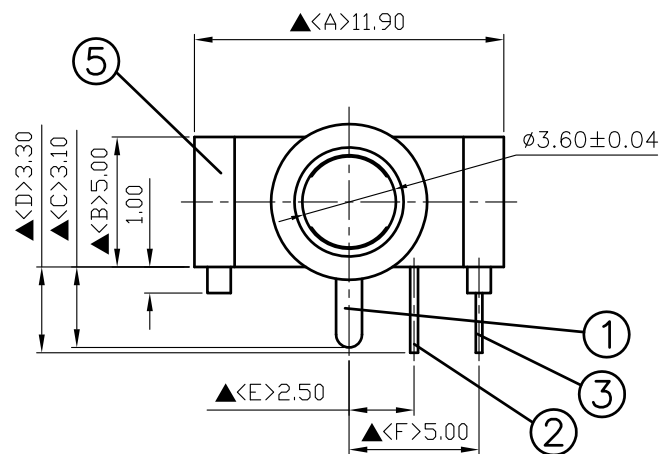
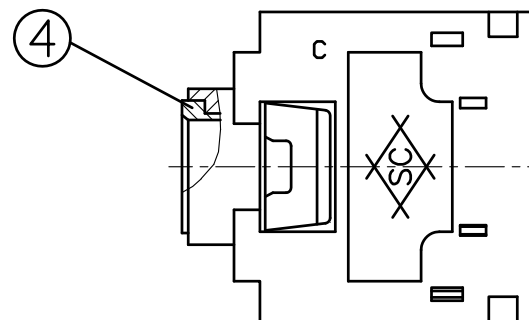




Pin Hole Layout
(Jack Bottom View)

5.	Housing	PBT+15%	1	Black Color
4.	Barrel	Low Lead Brass Rod	1	Nickel Plated
3.	Tip Spring	0.25T YcuT	1	Silver Plated
2.	Break Terminal	0.3T Brass	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

S.C. PRECISION INDUSTRIAL CO., LTD. 旭 全	DATE	DWN	CHKD	APVD	MANAGER
	11.22.2021	王平華			

PART NAME: 3.5φ PHONE JACK	PART NUMBER: SCJ355R0NYS0B00L	VERSION:1.0
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant