

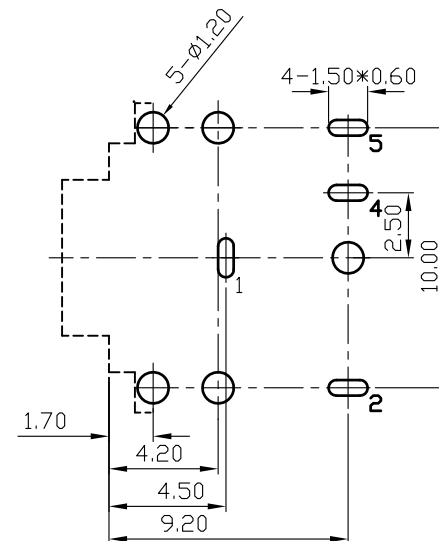
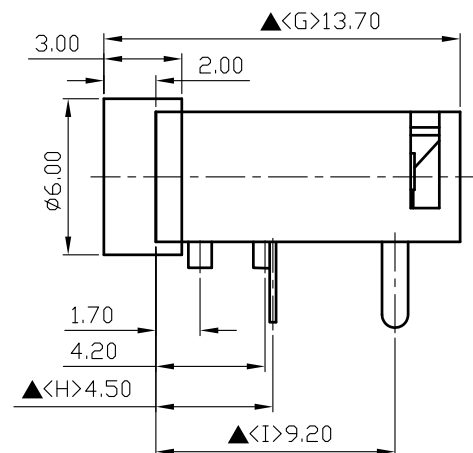
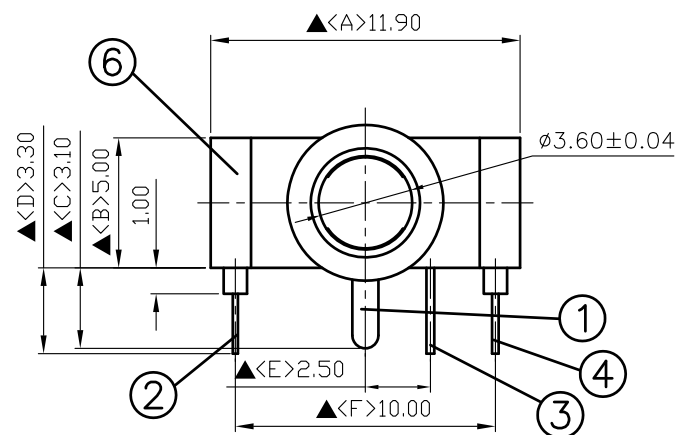


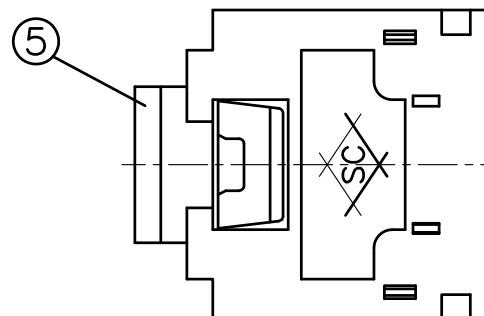

Pin Hole Layout
(Jack Bottom View)

6.	Housing	PBT+15%	1	Black Color
5.	Barrel	Low Lead Brass Rod	1	Nickel Plated
4.	Tip Spring	0.25T YcuT	1	Silver Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Ring Spring	0.2T YcuT	1	Silver Plated
1.	Earth Terminal	0.25T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish



S.C. PRECISION INDUSTRIAL CO., LTD.

DATE	DWN	CHKD	APVD	MANAGER
11.22.2021	王平華			

PART NAME: 3.5 ϕ PHONE JACK

PART NUMBER: SCJ355R1NVS0B00L

VERSION:3.0

TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE:1/1

SPECIFICATIONS:

Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

For Redference
僅供參考

RoHS&SVHC
Compliant