
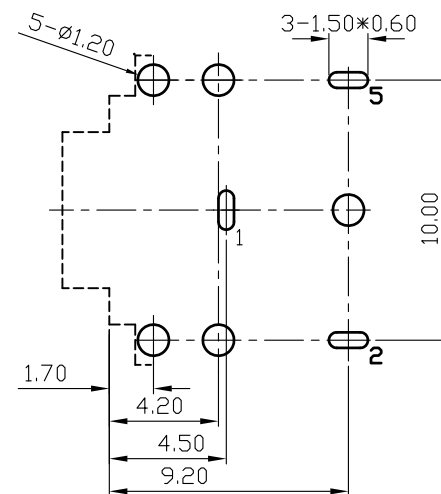
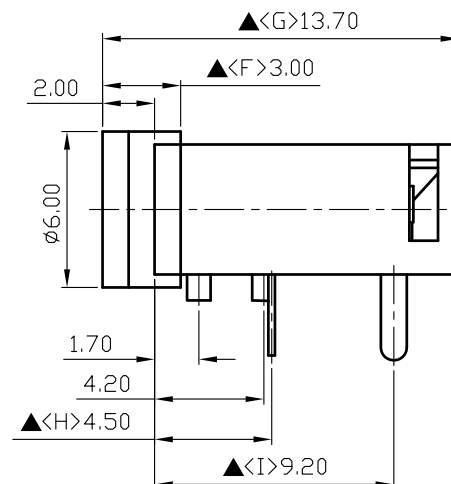
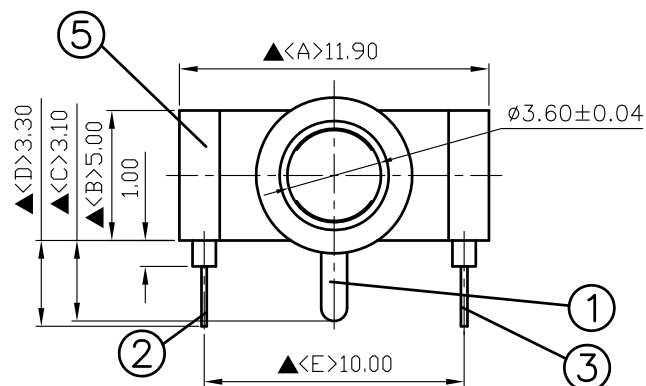
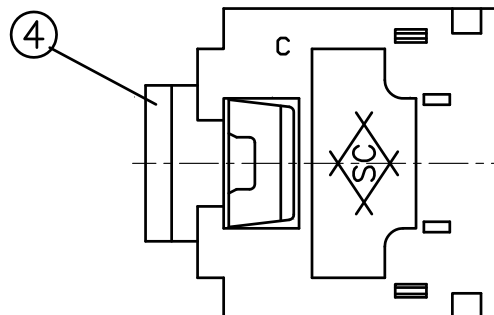




Pin Hole Layout  
(Jack Bottom View)

|     |                |                       |      |               |
|-----|----------------|-----------------------|------|---------------|
| 5.  | Housing        | PBT+15%               | 1    | Black Color   |
| 4.  | Barrel         | Low Lead Brass Rod    | 1    | Nickel Plated |
| 3.  | Tip Spring     | 0.25T Phosphor Copper | 1    | Silver Plated |
| 2.  | Ring Spring    | 0.2T Phosphor Copper  | 1    | Silver Plated |
| 1.  | Earth Terminal | 0.2T Phosphor Bronze  | 1    | Silver Plated |
| NO. | Description    | Material              | Q'TY | Finish        |

|                                                                                                                        |            |     |      |      |         |
|------------------------------------------------------------------------------------------------------------------------|------------|-----|------|------|---------|
|  S.C. PRECISION INDUSTRIAL CO., LTD. | DATE       | DWN | CHKD | APVD | MANAGER |
|                                                                                                                        | 11.22.2021 | 王平華 |      |      |         |

|                                              |                               |             |
|----------------------------------------------|-------------------------------|-------------|
| PART NAME: 3.5ø PHONE JACK                   | PART NUMBER: SCJ355R1NXS0B00L | VERSION:3.0 |
| TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED | UNIT:mm                       | SCALE:1/1   |

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstand Voltage : AC 500V for one minute  
Remark: ▲: The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Compliant